HPK/2011
05 DEC 2011

# Regor 5


## High Specification 500W Halogen Floodlight with Integral P.I.R.

| Regor 5 | Black | White | Aluminium |
|---|---|---|---|
| Code | PGT500 | PGT502 | PGT504 |

**Mounting Brackets & Accessories**

See page 59 for details

| Spares | Code |
|---|---|
| Replacement Glass | PFT517 |

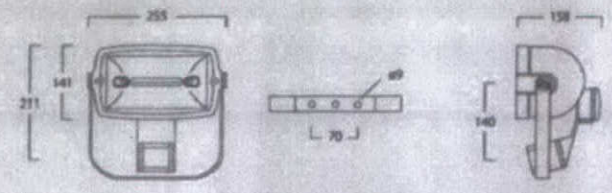


A superior quality 500W Halogen floodlight for use where style and performance is paramount. Robustly constructed to protect against the elements, Regor 5 provides powerful and reliable security lighting for commercial and residential properties.

- P.I.R. adjustable independent of floodlight alignment
- Up to 12m x 120° detection zone
- Lens sections can be masked to prevent nuisance switching
- Switch on period adjustable 10 secs - 15 mins
- Light level below which unit becomes operable is adjustable from 2-2000 lux
- Lamp not included






# Regor 6

## High Specification 42-100W IP65 Floodlight

| Lamp | Black | White |
|---|---|---|
| 70W SON-E* | PPS70 | PPS72 |
| 70W SON-T** | PPS70T | PPS72T |
| 80W MBF | PPM80 | PPM82 |
| 100W Metal Halide | PPH100 | PPH102 |
| 70W Metal Halide | PPH75 | PPH77 |
| 42W TC-T | PCF42 | PCF44 |

**Options & Accessories** — Black — White

**Photocell Version**

Regor 6 models (except 100W for thermal reasons) are available fitted with an integral Photocell for dawn to dusk switching.

| Lamp | Black | White |
|---|---|---|
| 70W SON-E* | PPS70 | PPS72 |
| 70W SON-T** | PPS70T | PPS72T |
| 80W MBF | PPM80 | PPM82 |
| 70W Metal Halide | PPH75 | PPH77 |
| 42W TC-T | PPF42 | PPF44 |


**Mounting Brackets & Accessories**

See page 59 for details

*SON-E (I) lamp with integral ignitor
**SON-T (E) separate ignitor fitted within luminaire

- Tough polycarbonate housing and UV resistant and hinged clear polycarbonate cover
- Projected area 0.11m²
- Compact fluorescent version for virtually instant white light



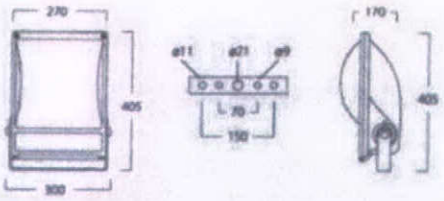

# ecolux

## Introducing Ecolux the new slimmer, brighter and most economical trough light in the UK.

Born from 17 years of sign lighting expertise Ecolux is the most technically advanced L.E.D. trough light of its kind.

Increased light output with greatly reduced running costs Ecolux addresses environmental issues without compromising performance. With its compact 60mm diameter casing Ecolux offers contemporary styling without the time consuming problem of housing external drivers.




**70% ENERGY SAVING** – 12.5 Watts per metre against 40 Watts for fluorescent

**FAST PAYBACK** – 14 month payback against cost difference of Signlux

**BRIGHTER** – 85 Lumens per watt output against 80 lumens per watt fluorescent

**FULL OPTICAL CONTROL** – 140 degree LED combined with 90 degree lens reduces spotting

**COMPETITIVE** – Cost 25% less than Ledlux

**COMPACT** – 60mm Diameter, smallest LED trough with internal drivers

**DOUBLE PROTECTED** – Both LED strip and drivers sealed to IP67 and casing to IP64


**FIT IT FORGET IT** – 2 year warranty

**QUICK FIX BRACKETS** – 4 way adjustability

**POLISHED CHROME FINISH** – 8 standard colours and finishes now in stock



# ecolux

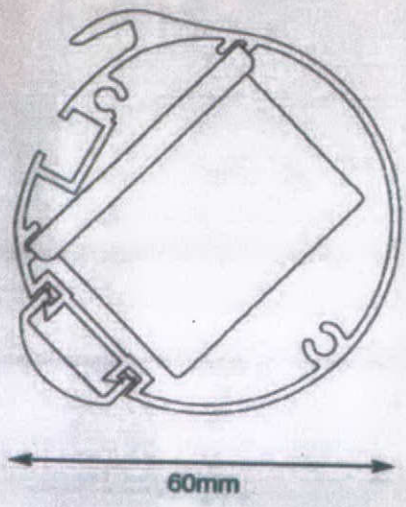


## technical specification

**LED strip**

Latest high lighting chip technology giving 85 lumens per watt output

Over 1000 Lumens per metre LED output

Only 12.5 watts per metre power consumption 75% energy saving compared to Fluorescent

24 volt input, less current less voltage drop

7000k pure white colour 140 degree angle

IP67 protected, 50,000 hours+ lamp life

2 year Warranty

Full CE certification and ROHS compliant

Reliability Data Report overleaf

**Light Fitting**

Specially designed 60mm diameter aluminium extrusion supplied up to 6150mm lengths which can be joined together using cast aluminium connectors

Die cast aluminium end caps

Standard 300mm Kwik Fit brackets

Clip in polycarbonate 90 degree magnifying lens

Casing sealed to IP64

**Drivers**

Epoxy encapsulated fully isolated case with IP67 protection

Constant voltage design

Short circuit, over current, over voltage protection

100% full load burn-in test

Full CE certification and 2 year Warranty

Fitted onto Kwik release slide in Gear Trays

## prices

**Prices include:**
Polyester powder coated black or white and 300mm universal brackets.

| Length Up To | Cost | Length Up To | Cost | Length Up To | Cost |
|---|---|---|---|---|---|
| 2ft - 610mm | £69 | 10ft - 3048mm | £180 | 18ft - 5486mm | £329 |
| 3ft - 914mm | £79 | 11ft - 3352mm | £200 | 19ft - 5791mm | £348 |
| 4ft - 1219mm | £89 | 12ft - 3658mm | £220 | 20ft - 6096mm | £360 |
| 5ft - 1524mm | £110 | 13ft - 3962mm | £238 | Pictorial set | |
| 6ft - 1829mm | £119 | 14ft - 4267mm | £256 | 2ft - 610mm | £148 |
| 7ft - 2134mm | £139 | 15ft - 4572mm | £274 | Pictorial set | |
| 8ft - 2438mm | £158 | 16ft - 4877mm | £293 | 3ft - 914mm | £168 |
| 9ft - 2743mm | £178 | 17ft - 5182mm | £311 | Amenity Light | £59 |

## options

| | | | |
|---|---|---|---|
| Non standard brackets from | £5 each | Non standard colours | POA |
| Standard stock colours | £40 lot | Photo Electric Cell switching | £20 |
| Chrome finish | £10 per metre | | |


The co-operative travel
Last Minute Deals
£25


stop
your local


your local store