


VENT-AXIA BLACK SABRE SLIM CASE SICKLE FANS (BSC)

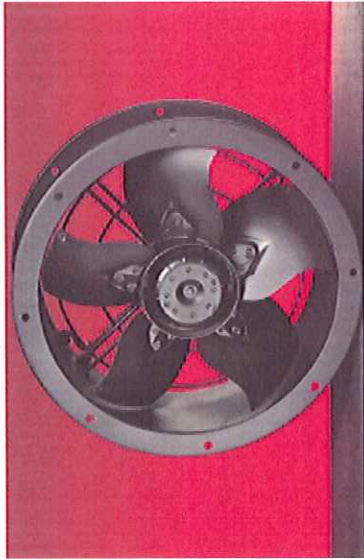

BLACK SABRE CASE MOUNTED SICKLE FANS
Black Sabre Sickle bladed fans are the latest addition to the Vent-Axia range offering improved pressure characteristics over axial units and lower sound levels. The advanced blade design and purpose built motor ensure excellent reliability and speed control.

CONSTRUCTION
The Black Sabre range share the same case lengths as the Cased axial range making them fully interchangeable and total compatibility with the full range of Vent-Axia Accessories. The strong and compact short case is constructed from rolled steel plate, electro welded and protected with a tough, epoxy paint finish. Casing dimensions are to DIN 24151 and flange dimensions are to ISO 6580. Manufacture is controlled to BS EN ISO 9001. The compact motor/impeller unit is robustly supported within the casing by electro-welded and epoxy coated steel rod mounting supports for ease of installation and service access. Suitable for all weather outdoor environments.


IMPELLERS
The motors and impellers are factory matched, statically and dynamically balanced to VDI 2060 Quality Class G.6.3.

MOTORS
The external rotor motors are specifically designed and styled for this range of fan. Ball bearings are greased for life. Sizes 250-710 motors are

protected to IP54, against dust and moisture complying with BS EN 60529. They have ribbed aluminium body castings for efficient cooling with Motor insulation to Class 'F' (from -40°C to +70°C). Speed controlled sizes 450 to 710, 6 & 8 pole motors are only suitable for operating temperatures of up to 40°C.

ELECTRICAL
The Sabre range is available for either single phase 220-240V 50 Hz capacitor start and run or three phase 380-415V 50Hz. Motors are fitted with Standard Thermal Overload Protection (S.T.O.P.) which should be wired into all controller circuits and into starter contactors to prevent motor damage due to overloading / overheating. Three phase 380-415V 50Hz units, from 450 to 710 diameter are fitted as standard with 2 speed Delta/Star connection motors. Most units are suitable for speed control by either electronic, voltage reduction or frequency inverters where permissible.

FORM OF RUNNING



- ✓ Sizes 250 to 710 dia are protected to IP54.
- ✓ Motor Insulation Class F up to +70°C
- ✓ 450 to 710 dia, 3 phase motors, 2 speed as standard.
- ✓ All weather epoxy paint finish.
- ✓ Standard Thermal Overload Protection (S.T.O.P.).
- ✓ Performance tested to BS 848 Part 1.
- ✓ 5 Year Guarantee.

TERMINAL BOX

An IP65 terminal box is supplied with all models with 20mm and PG11 entry offering protection against dust and water jets from any angle.

PERFORMANCE

The fan performance, is in accordance with tests to BS 848 Part 1.

SOUND LEVELS

Fan sound levels, measured in a reverberant chamber in accordance with BS 848 Part 2: Published dB(A) figures are free field sound pressure levels at 3m with spherical propagation at a reference level of 2 x 10⁻¹² Pa (20 micro-Pascal). The sound power level spectra figures are dB with a reference level of 10⁻¹² Watts (1 pico-watt). To ensure minimum noise levels during speed control, an auto transformer speed control is recommended.

ACCESSORIES

A full range of accessories is available with the Sabre Slim Cased Sickle fans:
Electronic Speed Controllers.
Auto Transformer Speed Controllers.
Inverter Speed Controller, where permissible.
D.O.L. Starters.
Ancillary Packs.
Flexible Connections.
Mounting Feet.
Coupling Flanges.
Anti-Vibration Mounts.
Attenuators.

BLACK SABRE SLIM CASE SICKLE FANS PERFORMANCE GUIDE

4 POLE m³/s at Pa

Stock	IP	25	50	75	100	125	150	175	200	225	250	300	350	Motor SC	FLC dBA
Dia Motor Ref. No	Rating	0	25	50	75	100	125	150	175	200	225	250	300	350	FLC
315 1 phase BSC315-14	1400	IP54 0.581	0.532	0.463	0.381	0.222	0.179	0.123	0.057					0.12	2.12 0.53
3 phase BSC315-34	1420	IP54 0.584	0.535	0.465	0.382	0.223	0.180	0.123	0.057					0.13	2.76 0.46
355 1 phase BSC355-14	1400	IP54 0.784	0.721	0.638	0.554	0.453	0.258	0.198	0.118					0.12	2.20 0.55
3 phase BSC355-34	1400	IP54 0.835	0.770	0.682	0.592	0.488	0.282	0.226	0.175	0.083				0.15	2.52 0.56
400 1 phase BSC400-14	1360	IP54 1.555	1.458	1.291	1.062	0.583	0.465	0.363						0.32	6.40 1.60
3 phase BSC400-34	1380	IP54 1.555	1.458	1.291	1.062	0.583	0.465	0.363						0.36	4.40 1.10
450 1 phase BSC450-14	1280	IP54 1.902	1.885	1.720	1.602	1.495	1.380	0.860	0.742	0.640	0.508	0.383	0.114	0.63	11.20 2.80
3 phase BSC450-34	1340	IP54 1.976	1.881	1.721	1.602	1.495	1.380	0.860	0.742	0.640	0.508	0.383	0.113	0.59	7.80 1.30
500 1 phase BSC500-14	1350	IP54 2.667	2.576	2.463	2.301	2.140	1.945	1.582	1.271	1.087	0.915	0.766	0.469	0.85	15.20 3.80
3 phase BSC500-34	1370	IP54 2.708	2.615	2.500	2.336	2.173	1.975	1.708	1.590	1.104	0.920	0.778	0.476	0.232	0.97 11.40 1.90
560 1 phase BSC560-14	1300	IP54 3.472	3.337	3.179	3.021	2.840	2.615	2.344	2.029	1.616	1.374	1.172	0.744	0.383	1.30 24.00 6.00
3 phase BSC560-34	1340	IP54 3.579	3.440	3.277	3.114	2.928	2.696	2.417	2.092	1.666	1.417	1.208	0.767	0.395	1.40 15.00 2.50
630 1 phase BSC630-14	1325	IP54 3.982	3.843	3.657	3.449	3.218	2.963	2.699	2.440	2.176	1.782	1.551	1.180	0.925	1.30 22.80 5.70
3 phase BSC630-34	1330	IP54 3.998	3.858	3.672	3.463	3.231	2.975	2.710	2.450	2.185	1.789	1.557	1.185	0.929	1.40 15.00 2.50

6 POLE

450 3 phase BSC450-36	1050	IP54 1.570	1.480	1.374	1.261	1.114	0.724	0.553	0.388	0.219				0.23	3.42 0.57
500 3 phase BSC500-36	900	IP54 2.336	2.196	2.045	1.894	1.720	1.487	1.092	0.813	0.569	0.348	0.127		0.27	3.72 0.62
560 3 phase BSC560-36	860	IP54 3.091	2.928	2.777	2.580	2.370	2.138	1.859	1.371	1.022	0.743	0.464		0.45	5.40 0.90
630 3 phase BSC630-36	880	IP54 3.486	3.277	3.068	2.812	2.556	2.324	2.045	1.720	1.255	0.813	0.464		0.74	9.00 1.50
710 1 phase BSC710-16	860	IP54 4.311	4.013	3.652	3.269	2.840	2.406	1.616	1.330	1.037	0.766	0.518		0.90	16.00 4.00
3 phase BSC710-36	920	IP54 4.444	4.137	3.765	3.370	2.928	2.468	1.666	1.371	1.089	0.790	0.534		1.00	15.60 2.60

8 POLE

710 3 phase BSC710-38	670	IP54 3.280	2.887	2.071	1.110	0.306	0.291							0.46	7.80 1.30
-----------------------	-----	------------	-------	-------	-------	-------	-------	--	--	--	--	--	--	------	-----------

S.C. =
FULL LOAD CURRENT

NOTE: All * models are supplied with 2 speed connection motors as standard. (Sizes 450-630 dia. are 4/6 pole, 710 are 6/8 pole).

DELTA Δ (HIGH SPEED)

STAR ★ (LOW SPEED)

ONLY SELECT THE FANS TYPED IN RED WHEN CONFIDENT OF YOUR SYSTEM RESISTANCE DATA.

Stock Ref. No.	Electronic controller	Auto transformer	D.O.L. starters & overload	Mounting feet	Inlet wire guard	Coupling flange	Axial fan pack	Cased axial attenuator	Anti-vibration mount	Ref. No.
BSC315-14	W103 03 102M	103 14 103	103 11 240 + 103 12 007	105 03 315	105 05 315	105 06 315	105 13 315	105 14 315	105 15 315	105 23 033
BSC315-34	-	103 14 301	103 11 415 + 103 12 007	105 03 315	105 05 315	105 06 315	105 13 315	105 14 315	105 15 315	105 23 033
BSC335-14	W103 03 102M	103 14 103	103 11 240 + 103 12 007	105 03 355	105 05 355	105 06 355	105 13 355	105 14 355	105 15 355	105 23 033
BSC335-34	-	103 14 301	103 11 415 + 103 12 007	105 03 355	105 05 355	105 06 355	105 13 355	105 14 355	105 15 355	105 23 033
BSC400-14	W103 03 102M	103 14 103	103 11 240 + 103 12 011	105 03 400	105 05 400	105 06 400	105 13 400	105 14 400	105 15 400	105 23 033
BSC400-34	-	103 14 301	103 11 415 + 103 12 011	105 03 400	105 05 400	105 06 400	105 13 400	105 14 400	105 15 400	105 23 033
BSC450-14	W103 03 103A	103 14 103	103 11 240 + 103 12 018	105 03 450	105 05 450	105 06 450	105 13 450	105 14 450	105 15 450	105 23 033
BSC450-34	-	103 14 301	103 11 415 + 103 12 018	105 03 450	105 05 450	105 06 450	105 13 450	105 14 450	105 15 450	105 23 033
BSC500-14	W103 03 106A	103 14 105	103 11 240 + 103 12 070	105 03 500	105 05 500	105 06 500	105 13 500	105 14 500	105 15 500	105 23 033
BSC500-34	-	103 14 304	103 11 415 + 103 12 027	105 03 500	105 05 500	105 06 500	105 13 500	105 14 500	105 15 500	105 23 033
BSC560-14	-	-	103 11 240 + 103 12 105	105 03 560	105 05 560	105 06 560	105 13 560	105 14 560	105 15 560	105 23 033
BSC560-34	-	-	103 11 415 + 103 12 040	105 03 560	105 05 560	105 06 560	105 13 560	105 14 560	105 15 560	105 23 033
BSC630-14	-	-	103 11 240 + 103 12 070	105 03 630	105 05 630	105 06 630	105 13 630	105 14 630	105 15 630	105 23 033
BSC630-34	-	-	103 11 415 + 103 12 040	105 03 630	105 05 630	105 06 630	105 13 630	105 14 630	105 15 630	105 23 033
BSC650-36	-	103 14 301	103 11 415 + 103 12 007	105 03 650	105 05 650	105 06 650	105 13 650	105 14 650	105 15 650	105 23 033
BSC650-36	-	103 14 301	103 11 415 + 103 12 011	105 03 650	105 05 650	105 06 650	105 13 650	105 14 650	105 15 650	105 23 033
BSC650-36	-	103 14 301	103 11 415 + 103 12 011	105 03 650	105 05 650	105 06 650	105 13 650	105 14 650	105 15 650	105 23 033
BSC650-36	-	103 14 301	103 11 415 + 103 12 011	105 03 650	105 05 650	105 06 650	105 13 650	105 14 650	105 15 650	105 23 033
BSC710-16	W103 03 106A	103 14 105	103 11 240 + 103 12 070	105 03 710A	105 05 710	105 06 710A	105 13 710A	105 14 710A	105 15 710A	105 23 033
BSC710-36	-	103 14 301	103 11 415 + 103 12 040	105 03 710A	105 05 710	105 06 710A	105 13 710A	105 14 710A	105 15 710A	105 23 033
BSC710-38	-	103 14 304	103 11 415 + 103 12 018	105 03 710A	105 05 710	105 06 710A	105 13 710A	105 14 710A	105 15 710A	105 23 033



AN INVERTER SPEED CONTROL KIT IS AVAILABLE FOR:

BSC 560-34 - 103 20 302 09

BSC 630-34 - 103 20 302 09

NOTE:- When speed control is required a 5-step auto transformer is recommended to ensure low noise levels.

NOTE:- All models are supplied with 2-speed delta/star connection motors, as standard. (Sizes 450 to 630 are 4/15 Pole).

When speed control is required on all other models a 5 step auto transformer speed controller is recommended, to ensure low noise levels. Guards: Some installations may occur where additional safety parts are needed, to ensure safety in operation. For example, the unit may be fitted at the inlet or outlet end of a ducted ventilation system, thereby exposing the impeller/motor to unguarded access. In this event, the installer must fit a safety guard complying to current regulations. These guards are available as an optional extra.

BLACK SABRE SLIM CASE SICKLE FANS
SOUND DATA


Sound Power Level Spectra dB (ref 10⁻¹² Watts)
4 POLE

Size	Inlet	125	250	500	1k	2k	4k	8k	dBA @ 3m
BSC315/4	77	73	66	65	63	60	56	46	47
BSC315/4	77	73	66	65	63	60	56	46	47
BSC355/4	78	73	61	64	65	63	58	50	49
BSC355/4	78	73	61	64	65	63	58	50	49
BSC400/4	79	76	70	65	68	67	56	50	52
BSC400/4	79	76	70	65	68	67	56	50	52
BSC450/4	79	78	71	68	70	68	64	55	54
BSC450/4	79	78	71	68	70	68	64	55	54
BSC500/4	80	79	76	72	75	75	68	61	59
BSC500/4	80	79	76	72	75	75	68	61	59
BSC560/4	82	81	80	79	79	77	74	65	63
BSC560/4	82	81	80	79	79	77	74	65	63
BSC630/4	83	85	82	83	84	80	79	66	67
BSC630/4	83	85	82	83	84	80	79	66	67
6 POLE									
BSC450/6	76	69	64	63	62	55	45	47	46
BSC450/6	76	69	64	63	62	55	45	47	46
BSC500/6	79	70	69	66	65	61	52	51	48
BSC500/6	79	70	69	66	65	61	52	51	48
BSC560/6	80	71	75	73	70	66	55	57	54
BSC560/6	80	71	75	73	70	66	55	57	54
BSC630/6	81	71	80	79	73	67	56	61	58
BSC630/6	81	71	80	79	73	67	56	61	58
BSC710/6	81	72	81	80	76	69	58	63	60
BSC710/6	81	72	81	80	76	69	58	63	60
8 POLE									
BSC710/8	75	70	70	69	68	58	53	53	50
BSC710/8	75	70	70	69	68	58	53	53	50

Note: The above Sound Power Level Spectra is for B-Form Running Fans.

Published dBA figures, are free field sound levels, at 3m, with spherical propagation at a reference level of 2 x 10⁻¹² Pa. The sound power level spectra figure, are dB with reference of 10⁻¹² Watts.

To ensure minimum noise levels during speed control, an auto transformer speed controller is recommended.

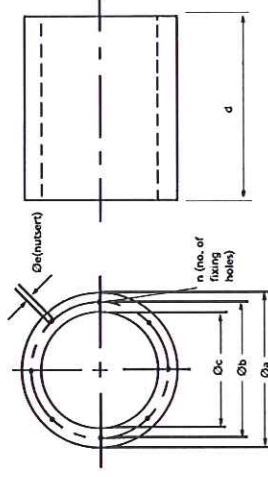


CASED AXIAL ATTENUATOR


Stock Ref. No.	Q _a	bD	Q _c	d	Q _e	n	kg approx	Fitted with pod kg approx	Free area m ² without pod
105 14 315	415	355	475	M8	8	32	0.07793		
105 14 355	455	395	540	M8	8	44	0.09898		
105 14 400	500	450	600	M10	8	60	0.12566		
105 14 450	550	500	675	M10	8	73	0.15804		
105 14 500	600	550	750	M10	12	89	0.19635		
105 14 560	660	620	840	M10	12	102	0.24630		
105 14 630	730	690	940	M10	12	120	0.31172		
105 14 710A	814	770	1070	M10	16	100	0.39567		

*Threaded hole to take bolt

For Insertion Losses see page 49.

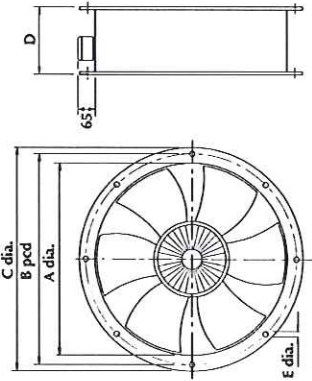


ACCESSORY DIMENSIONS (mm)



MOUNTING FEET


Ref. No.	a	b	c	d	e	f	g	h	i
105 03 315	275	24	224	224	10	14	115	177.5	167
105 03 355	303	24	250	250	10	14	125	197.5	187
105 03 400	348	24	280	280	12	14	135	225	213
105 03 450	384	24	315	315	12	14	155	250	238
105 03 500	425	24	355	355	12	14	175	280	268
105 03 560	475	24	355	355	12	14	155	310	298
105 03 630	520	24	400	400	12	14	175	345	333
105 03 710A	710	40	510	435	13	18	240	385	365

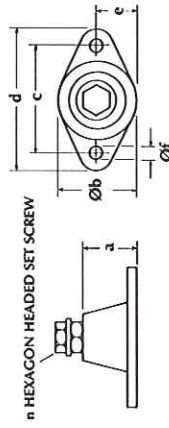

ANTI-VIBRATION MOUNTS


Ref. No.	a	b	c	d	e	f	g	h	i	j	k	l	m	n	o	p	q	r	s	t	u	v	w	x	y	z
105 23 033	27	37	54	67	18.5	7	N/8	23																		
105 23 055	27	37	54	67	18.5	7	N/8	35																		
105 23 133	35	57	76	95	28.5	10.5	M12	31																		

315 to 400 dia, 4 pole, 1 phase units

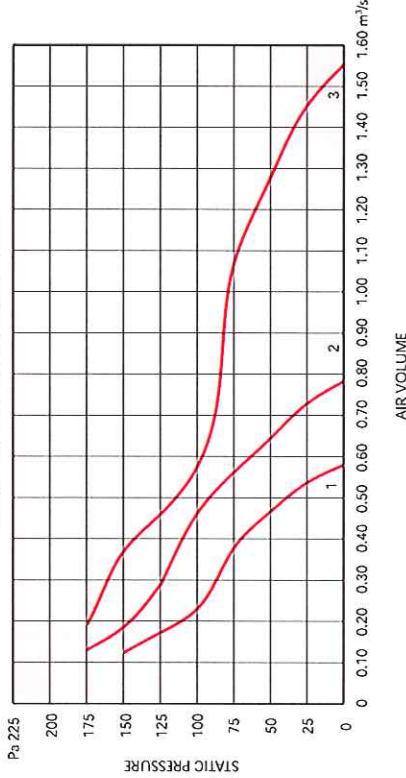

Size	315	355	400
1	2	2	3


315 to 400 dia, 4 pole, 3 phase units

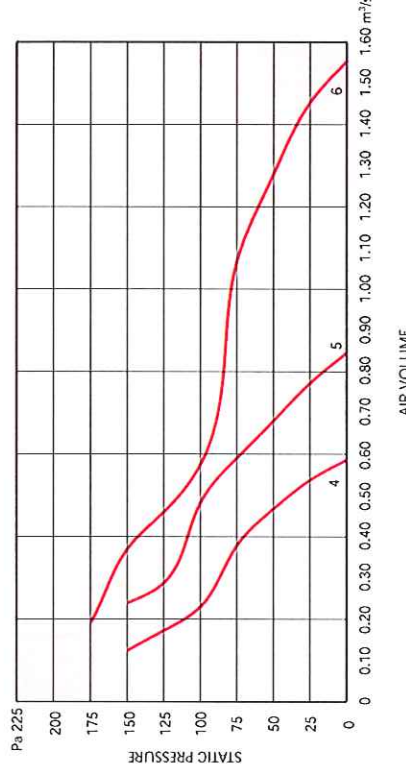

Size	315	355	400
4	4	5	6


BLACK SABRE SLIM CASE SICKLE FANS
PERFORMANCE CURVES

450 to 630 dia, 4 pole, 1 phase units

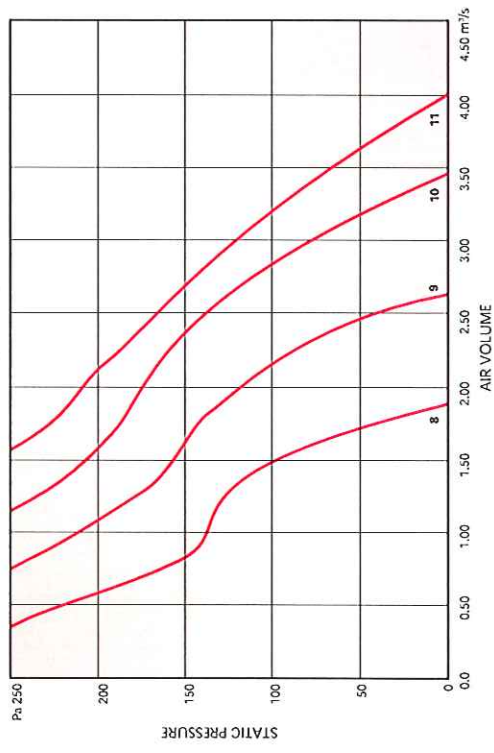

Size	450/1ph	500/1ph	560/1ph	630/1ph
	8	9	10	11


450 to 630 dia, 4 pole, 3 phase units

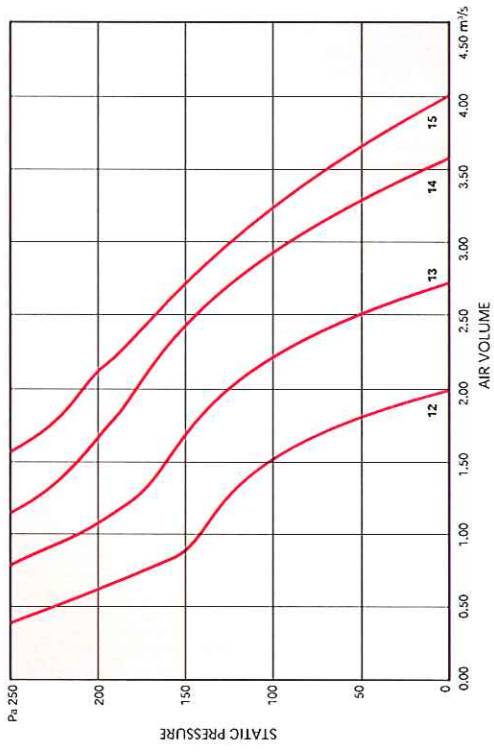

Size	450/3ph	500/3ph	560/3ph	630/3ph
	12	13	14	15


BLACK SABRE SLIM CASE SICKLE FANS
PERFORMANCE CURVES

710 dia, 6 pole, 1 phase units

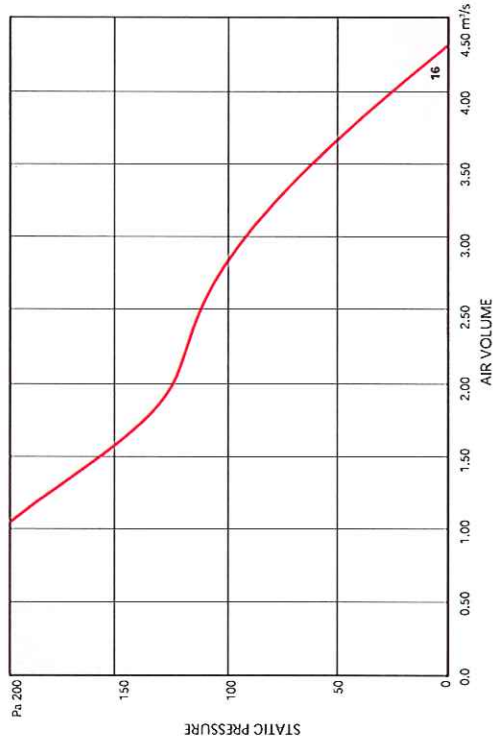

Size	710/1ph
	16

450 to 710 dia, 6 pole 3 phase & 710 dia 8 pole 3 phase units

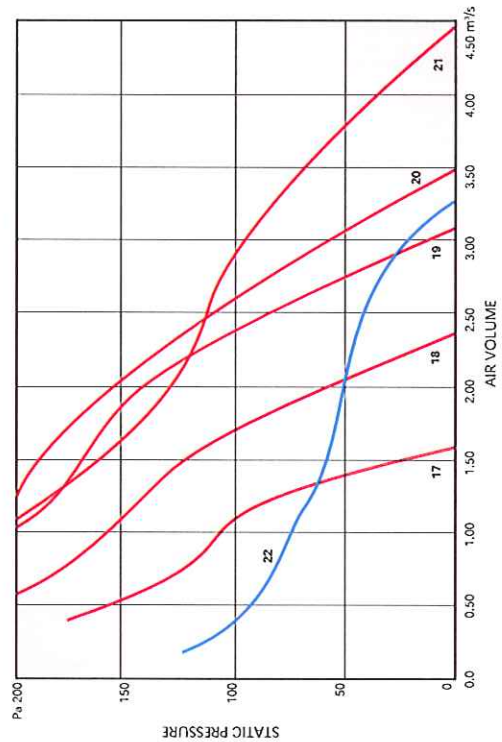

Size	450/3ph	500/3ph	560/3ph	630/3ph	710/6 Pole/3ph	710/8 Pole/3ph
	17	18	19	20	21	22