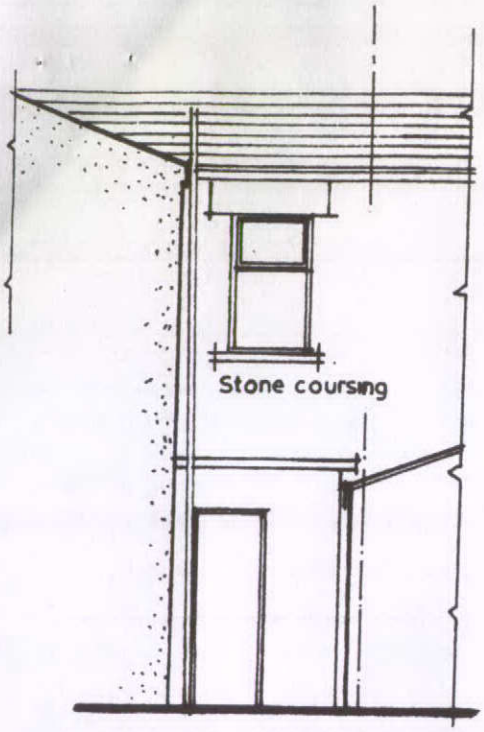

EXISTING REAR ELEVATION



EXISTING FRONT ELEVATION

WINDOW SPEC.

New replacement windows to be of traditional sash pattern double glazed in timber to Clients choice. with top hung opening light.

Glazing to be K glass & certified safety glass if cills less than 800mm above floor level. Windows to have a 1.8 u-value or better with a min 16mm air gap and a low-E coating

Frames to be sealed externally with flexible mastic. Frames to be supplied in primer finish for white gloss and fitted with all necessary furniture

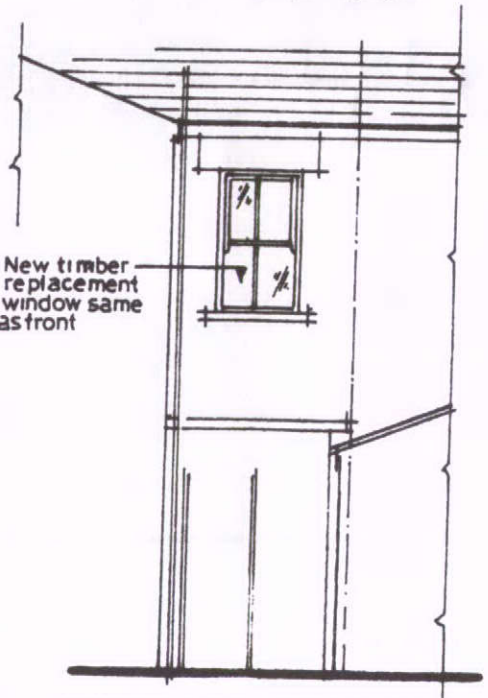

PROPOSED REAR ELEVATION



PROPOSED FRONT ELEVATION

Proposed Replacement Windows. 10 Henry Street Glossop. 1:100 OCT.2011 2624.1A