


External Hardwood Doors

Appendix 5.

DXP19** Regent Oak M&T 30 External doors

This traditional six panel oak door is supplied unfinished and lends itself to a variety of settings.

- Engineered construction using laminated hardwood core and real oak veneer
- Ready to finish with lacquer or stain

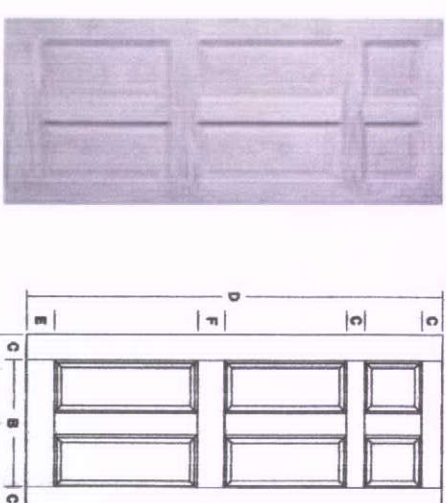

Lock Block

A lock block is not included on this door as it is a solid construction. The lock can be fitted in any location on either side.



Dimensions		
Door Width	2'9"	2'8"
Product Code	DXP1970	DXP1980
Building Regulations		
Weights (kg)	26	26
A = width (mm)	838	813
B = width - stiles (mm)	610	585
C = stile / top rails (mm)	114	114
D = height (mm)	1981	2032
E = bottom rail (mm)	180	180
F = middle rail (mm)	140	140

All sizes subject to standard industry tolerances
Part M Doors () - Mobility and Access



HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

External Hardwood Doors

Technical Specification

Construction

General	Veneer over finger jointed hardwood core
Core Material and Grade	Laminated Meranti, A grade
Thickness of Core Material	39mm
Timber Species	Meranti
Moisture Content	10 - 14%
Glue Specification	Full Exterior D4
Additional Information	Meranti finish colour

Veneer Specification

General	American White Oak
Thickness	2.5mm
Timber Species	American White Oak
Grade	A
Country of Origin	America

Edging Information

Lipping Dimensions	
Top (mm)	12
Bottom (mm)	12
Sides (mm)	12
Lipping material: American White Oak	

Maximum Trim	
Top (mm)	5
Bottom (mm)	5
Sides (mm)	5


An equal amount of timber should be removed from each side / top & bottom. Remaining within the parameters of the maximum trim instructions ensures the construction of the door is not compromised.

Fitting and Finishing

Please refer to door instructions for all fitting information. For identification, the Howdens Joinery logo and batch number is printed on the top of the door. Hardwood doors can be finished with solvent based, oil based or water based finishes. This door is suitable for finishing with: lacquer or stain. All stains sold by Howdens are suitable for use with Howdens doors. (Please always follow manufacturer's instructions)

Certification

Fire Certificate	Not applicable
Glazing Certificate	Not applicable

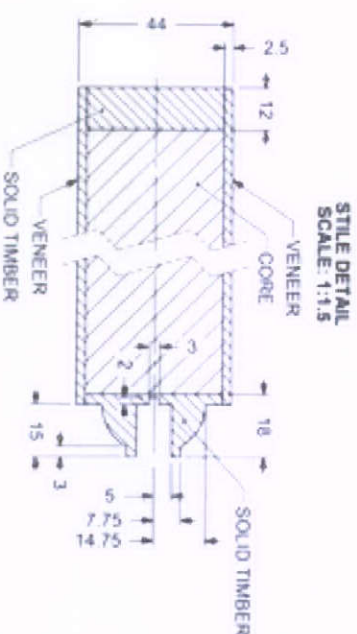

HOWDENS JOINERY CO.

MAKING SPACE MORE VALUABLE

The company has a policy of continuous product development and reserves the right to change any products and specific details at any time.

Issue Date: 27.07.2011