RECEIVED 2011/0328

ELEVATION ON WALL & TYRE RACKS



ELEVATION ON END OF TYRE RACKS



FIRST FLOOR LAYOUT

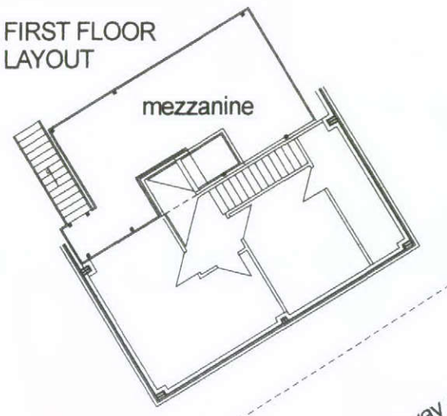

NOTE
Ramp and controls removed from current planning application.

Storage over offices

Lomas Foods warehouse

fire exit

mezzanine over

cold room

plant

WC

retaining wall to railway embankment

daily tyre racks

used tyre racks

controls

car ramp

aux.

used tyre racks

retaining wall

existing wall and fence

Dale Road

tank

waste

Tyre and exhaust workshop

Turning circle 16500 dia

site entrance

car

boundary fence

North

USED TYRES RACKS
Proprietory steel racking with monopitch roof as shown of mineral felt on exterior grade ply on treated softwood frame. Capacity is min 25 tyres per 3000 rack giving a total of 150 tyres in 6 racks as shown. This is more than sufficient for weekly collections. The capacity assumes an equal number of car and commercial tyres. In practice there are more of the former, giving a capacity greater than stated above.

NEW TYRES
Are on three existing wheeled racks that are stored within the building overnight.

CAR RAMP
The use of the car ramp will be limited to two about occasions per week.

Rev	Details	Date
A	Ramp removed from application	15.6.11

PROPOSED TYRE STORAGE & CAR LIFT AT STEVE'S TYRES & EXHAUSTS, DALE ROAD, BUXTON - PROPOSED SITE PLAN & ELEVATION ON STORAGE RACKS.

Trevor Gilman Design
73, Windsor Road Buxton Derbyshire SK17 7NR
Tel 01298 24156 Fax 07977 106903

Scale 1/200 | 14.3.11

Drg No STE 002 | Rev A