

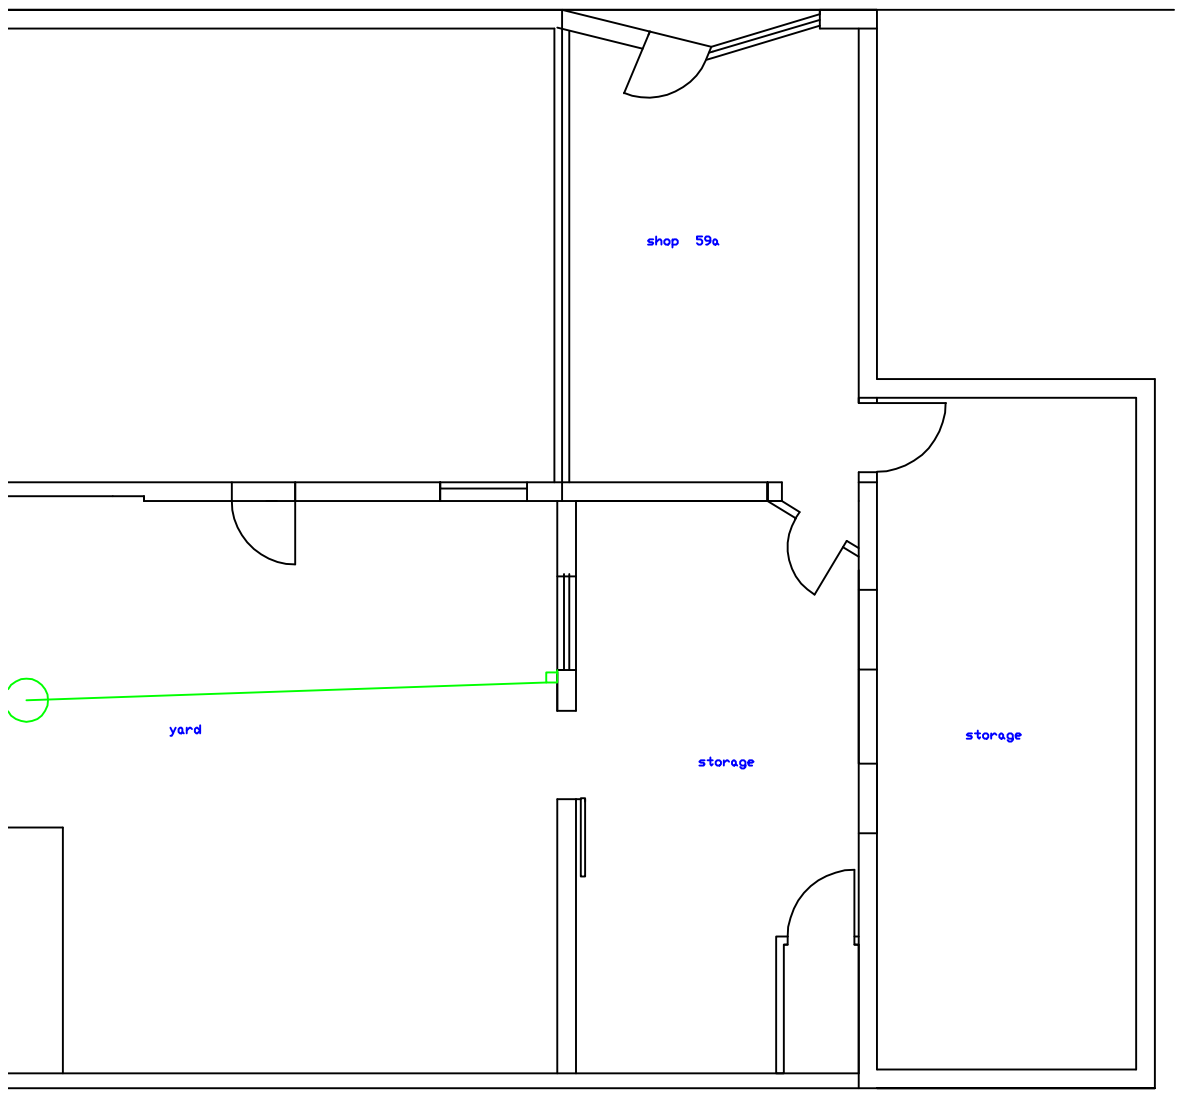



EXISTING
GROUND FLOOR
1:100

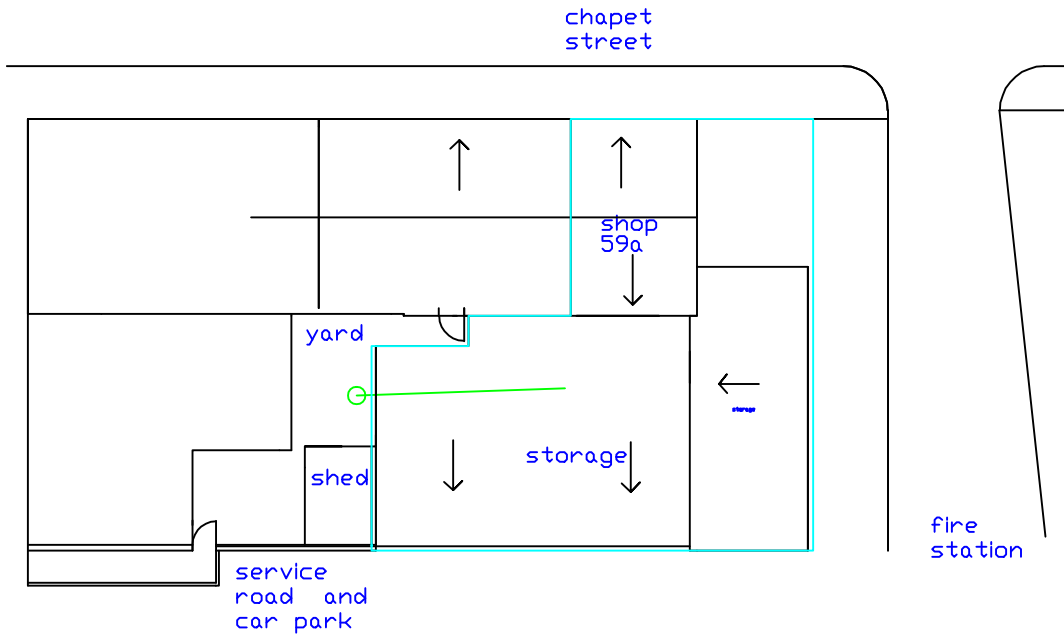

PROPOSED
ROOF / BLOCK
PLAN
1:250

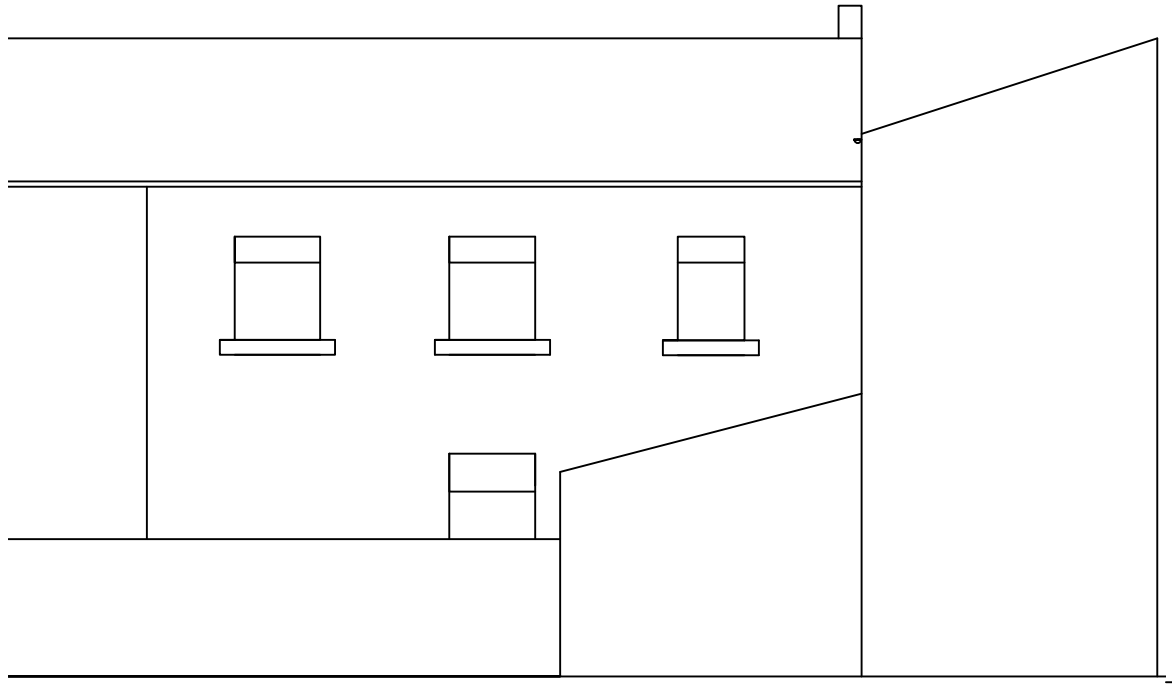

EXISTING
REAR VIEW
1:100

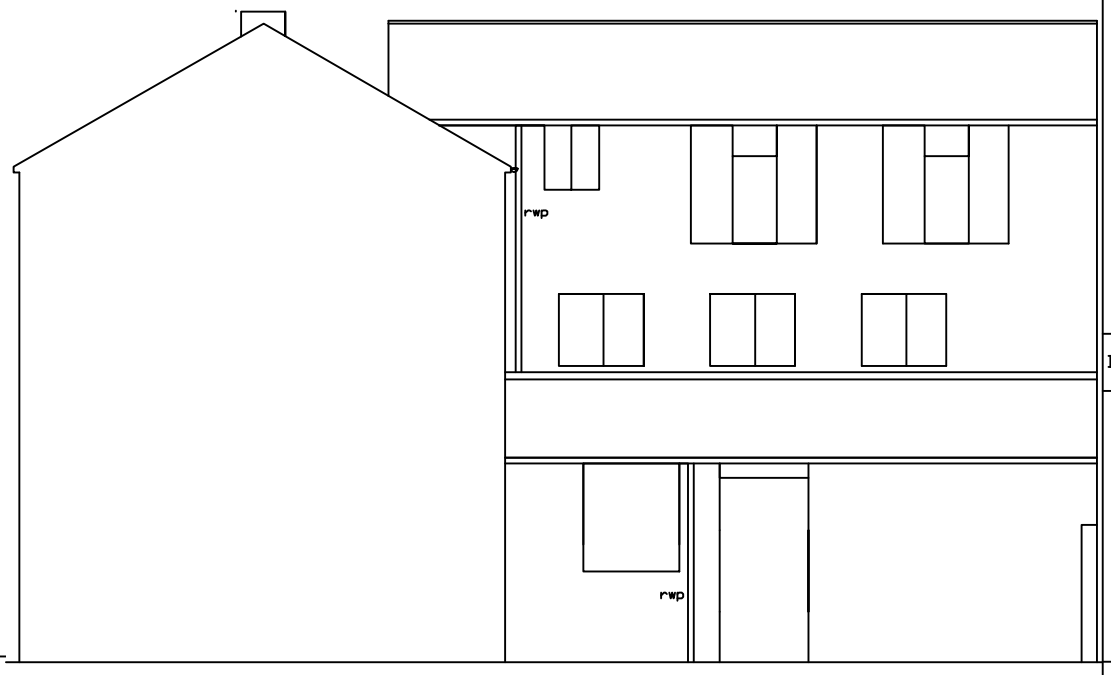

EXISTING SIDE
VIEW A
1:100

notes

ELECTRICAL WORKS BY A COMPETENT PERSON SCHEME MEMBER:
All wiring and electrical works to be designed, installed, inspected and tested in accordance with the requirements of BS 7671, the IEE 17th edition wiring guidance and Building Regulation Part P (Electrical Safety) by a member of the O.D.P.M Competent Person Scheme. AND
The competent person is to send to the Local Authority a 'Self-certification Certificate' within 30 days of the electrical works completion. Client must receive both a copy of 'Self-certification Certificate' and a BS 7671 Electrical Installation Test Certificate. All sockets at minimum 450mm height all switches maximum 1.200metres provide a max 25 % normal wattage fitting as required
All works carried out by NICEIC / ECA .Electrical works lighting and switches to new storage area new Emergency lighting as required layout to distribution board with a 5 amp switch13amp switched double sockets 8 No,storage area , back to the distribution board via 32 amp switch as required Fire /smoke alarm fitted ground floortc. smoke alarm to kitchen all interconnected into a hard wired separate circuit as required and back to the 5 amp switch as required. Along with a battery backup as required.
WINDOWS AND DOORS AND EXTERNAL UPVC PRODUCTS
All new windows and doors .16mm Argon filled double-glazing unitsK glass or 20mm double glazed units both with Low E coating as required. Rooms to have 1/20th opening light to floor area. All units to have 8,000 square mm of trickle ventilation. Any Velux windows to have low E coating as well Critical Glazing to below 800mm cill heightand within 300mm of door way opening etc. to have toughened /laminated safety glass to BS 6206.Fire escape windows to be 0.33square meter and 450mm clear opening at min 800mm high and maximum 1.100m above floor level as required
Willets trickle vents, fitted in accordance with manufacturer's instructions with open able vent areas of 8,000mm2 &4,000mm2 to habitable and non habitable rooms , 3 velux 1.40mm x 0.79m 1 windows, 1 sliding door as required,any new Rainwater 100mm gutters and 75 mm rain water pipes to be UPVC include all brackets' offsets and stop end . Any new drainage to be 100mm hep sleeve with flexible joints lay to self cleansing falls 1:40 and back filled with 5 mm pea gravel all as agreed with building control all connected into the existing separate system Any B.I Gullies to be rod able. Provide two new blow units gas 10, 00 btu as heating as required connected to the existing central heating system; provide thermostatic radiator valves to the new/ ,All gas works carried out by gas safe approved engineers / contractors only. No Internal plumbing .Check existing lintols , etc and foundations for suitability.

Date Rev

project:
HIGH PEAK BOROUGH COUNCIL
PLANNING AND BUILDING CONTROL APPLICATION

client:
STEVEN TOPPING,
PRIMROSE KITCHENS,
59A, CHAPELSTREET,
GLOSSOP,
DERBYSHIRE ,
SK13 8AT
TEL
01457861311
07973816136
EMAILPRIMEROSEKITCHEN CENTRE@HOTMAIL.CO.UK

Plans Drawn.
tel.no .07952934281
or 07856609593
email, Bawinterbottom@aol.com
PlansDrawn01@aol.com

drawing title:
PROPOSED SINGLE STOREY REAR EXTENSION FOR STORAGE

date:
JUNE. 2011

drawn:
DRW

project no.
cs59A

drg. no.
01

rev.