Ecolux (Scale 1:1)

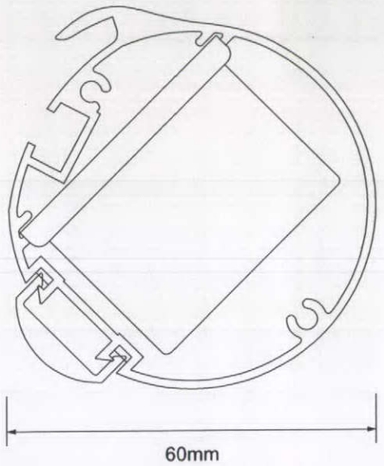

Light Fitting
Specially designed 60mm diameter aluminium extrusion supplied up to 6150mm lengths which can be joined together using cast aluminium connectors.

Die cast aluminium connectors.

Standard 300mm kwik t brackets.

Clip in polycarbonate 90 dgree lens.

Casing sealed to IP64.

Technical Specification

LED S
Latest high lighting chip technology giving 85 lumens per watt output.

Over 1000 Lumens per metre LED output.

Only 12.5 watts per metre power consumption 75% energy saving compared to uorescent.

24 volt input, less current, less voltage drop.

7000k pure white colour 140 dgree angle.

IP67 protected, 50,000 hours + lamp life.

2 Year Warranty.

Full CE certication and ROHS compliant.

Drivers
Epoxy encapsulated fully isolated case with IP67 protection.

Constant voltage design.

Short circuit, over current, over voltage protection.

100% full load burn-in test.

Full CE certication and 2 Year Warranty.

Fitted onto kwik release slide in gear trays.

Fascia Sign Specification

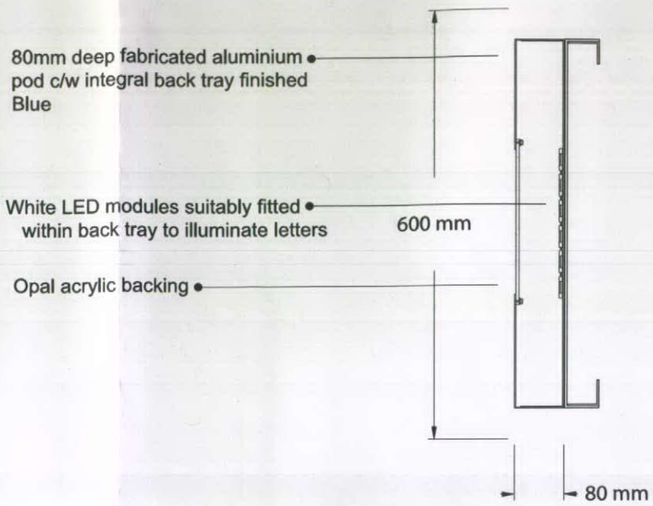

Section A-A
Scale 1 : 10

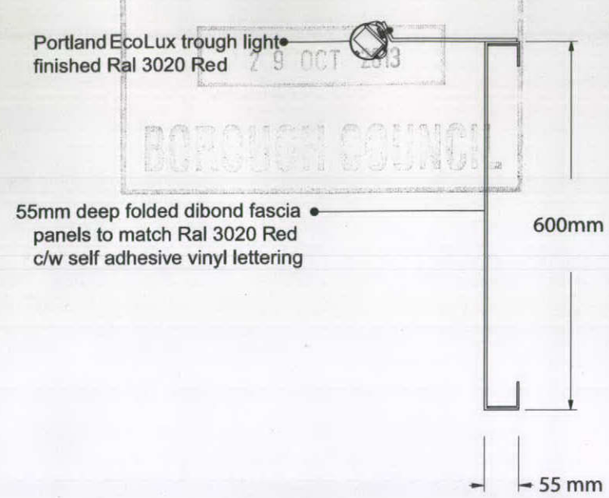

Section B-B
Scale 1 :10

HPK/2013/0601
HIGH PEAK
29 OCT 2013
BOROUGH COUNCIL

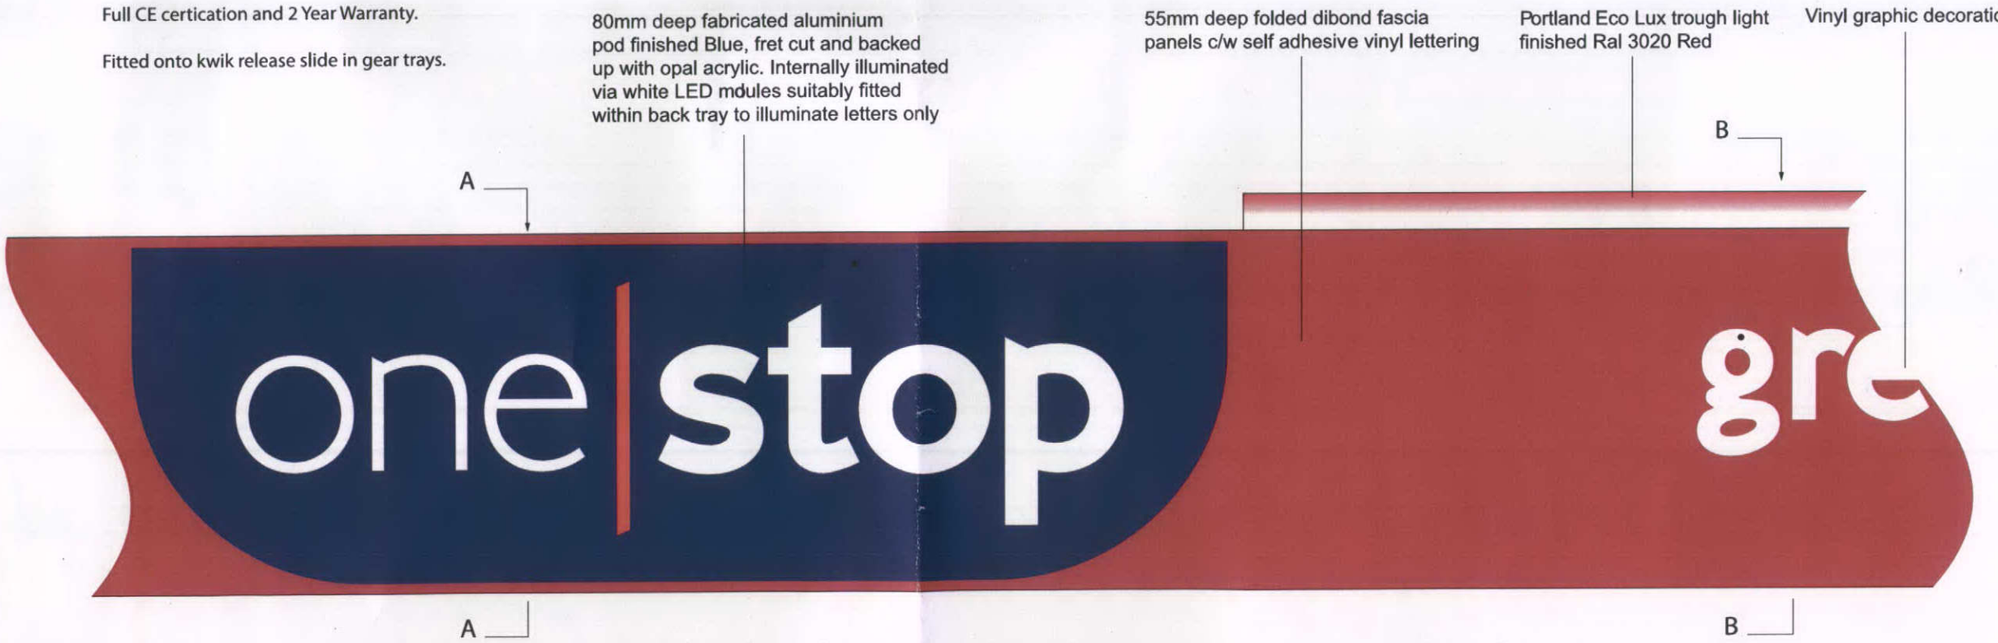

03

innovate signs
Unit 7 Fulcrum One, Solent W
Whiteley, Hants PO15 7FE
Tel: 0845 8722 870
Fax: 0845 8722 871
Web: www.innovatesigns.co.uk
Email: info@innovatesigns.co.uk

CLIENT	**One Stop**	TITLE	**Proposal**	**REV**	**DATE**	**DESCRIPTION**
STORE NAME	**Buxton**	DATE	**22/10/2013**			
EPOS CODE	**3104**	SCALE	**as detailed @ A3**			
PROJ TYPE	**New Store**	DRAWN	**BJR**			
DRWG NO.	**-**	REV	**Initial Visual**			

This drawing is for approval purposes. Please check all details noted on the drawing including spelling, and provide written confirmation of your approval to the Innovate Signs project manager. Once approved production will commence based on the approved drawing. Any changes made after production has begun will incur an additional cost.