HPK/2013/0535
1 NOV 2013

RED ARROW
ELECTRICAL DISTRIBUTION


NEW

LED

LED Floodlight With PIR Sensor



Voltage:	85-265V AC
Wattage:	10W / 30W / 50W
Lamp:	LED
Colour Temperature:	6500k (daylight)
Lifetime:	30,000 hours
Time Delay Feature:	Min 8sec ± 2sec Max 10min ± 2min
Detection Distance:	10-12m
Working Temperature:	-10°C - 40°C
Installation Height:	>1.8m - 3.5m
Working Humidity:	>93%RH
Detection Motion Speed:	0.6~1.5m/s
Beam Angle:	180°
IP Rating:	IP65
Chipset:	Bridgelux
Material:	Black, Die Cast Aluminium
Extra Info:	1m cable, hexagonal key and stainless steel screws included.

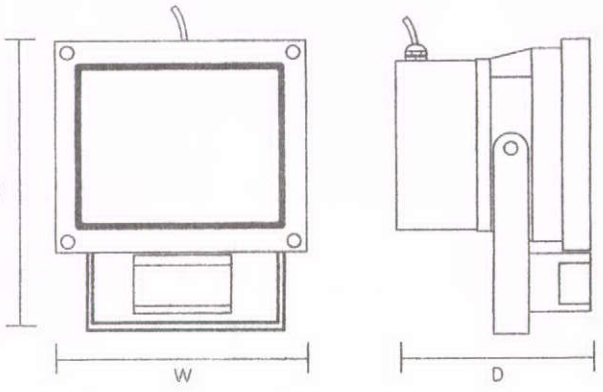

Models Available

MODEL	DESCRIPTION	WATTAGE	COLOUR	LUMEN OUTPUT (LM)	DIMENSIONS (MM)		
					WIDTH	DEPTH	HEIGHT
LEDFL10BPIR	Die Cast LED Floodlight c/w PIR Sensor	10W	Black	800	115	85	160
LEDFL30BPIR	Die Cast LED Floodlight c/w PIR Sensor	30W	Black	2400	225	150	230
LEDFL50BPIR	Die Cast LED Floodlight c/w PIR Sensor	50W	Black	4000	286	270	270

Red Arrow Trading
2 Manton Street, Sheffield, S2 4BA
T: 0800 195 0006 **F:** 0870 043 3946 **E:** sales@redarrowtrading.com
www.redarrowtrading.com