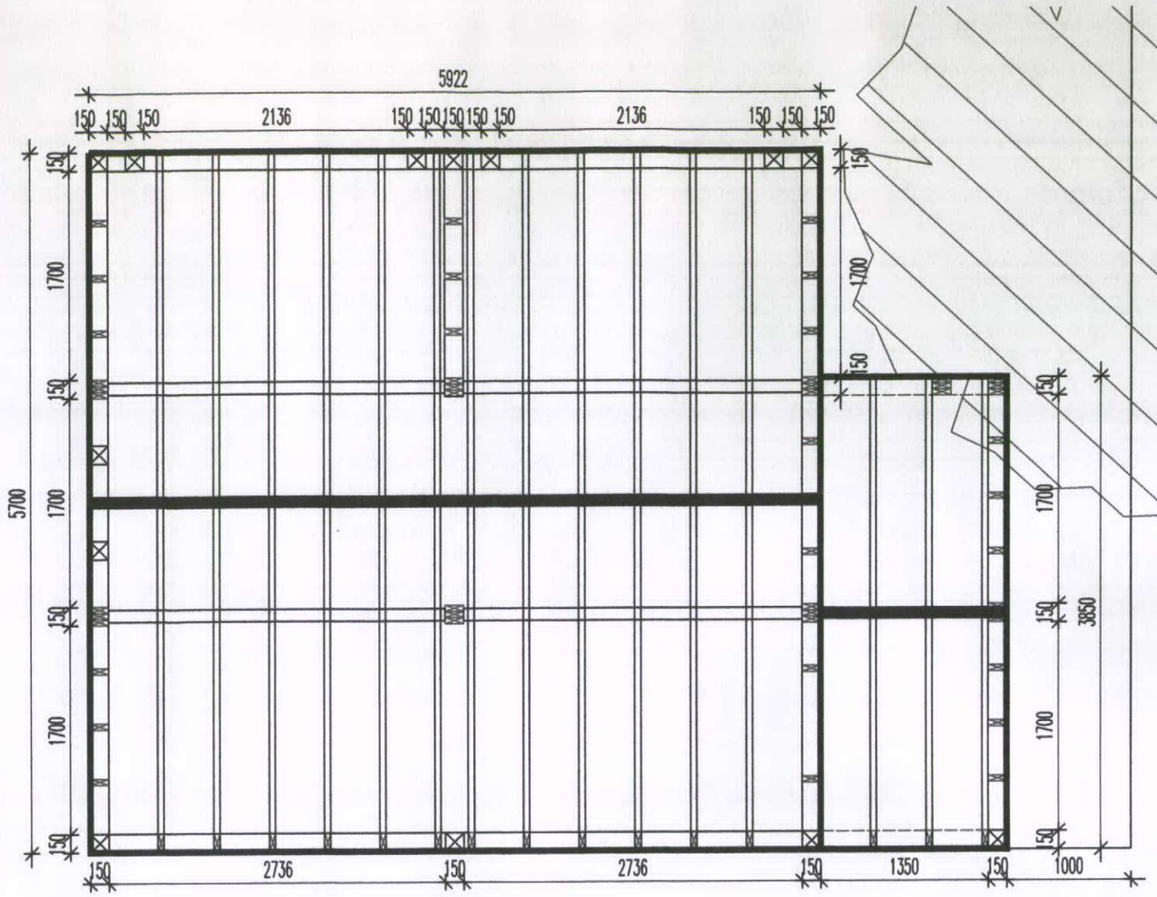

PROPOSED ROOF PLAN 1:50

GARAGE IS TO BE CONSTRUCTED OFF A NEW 150mm DEEP RC SLAB ON 1200g DPM AND WELL COMPACTED HARDCORE. 150sq HARDWOOD POSTS ARE TO BE SUPPORTED OFF 300x450 CONC PAD FOOTINGS WITHIN SLAB AS SHOWN. BASE TIMBER RING BEAM AT SLAB LEVEL IS TO BE 150x150 HARDWOOD BEAM WHICH IN TURN IS TO SUPPORT THE INTERNAL 150x50 FRAME AT 600ctrs. 225x100 RING BEAM IS SUPPORTED OVER OPENINGS AS SHOWN FROM THE 150x150 HARDWOOD 'POSTS'.

THE HARDWOOD FRAME IN TURN SUPPORTS 150x50 C24 GRADE RAFTERS AT 600 MAX ctrs AND COUNTER BATTENS TO TAKE A BLUE/GREY SLATE ROOF COVERING AT A PITCH OF 22.5deg. ENSURE ALL RAFTERS ARE STRAPPED TO THE RING BEAM AND IN TURN THE BEAM IS STRAPPED TO THE FRAME BELOW.

EXTERNAL WALLS ARE TO BE COVERED WITH 18x125 'OAK' SHIPLAP FINISH WITH OAK BEAMS EXPOSED TO AREAS SHOWN. INTERNALLY THE WALLS ARE TO BE FINISHED WITH AN EXTERNAL GRADE WALLBOARD ALL DOORS ARE TO BE A LEDGE AND BRACE CONSTRUCTION. WITH CONTRASTING WROUGHT IRON HINGES.

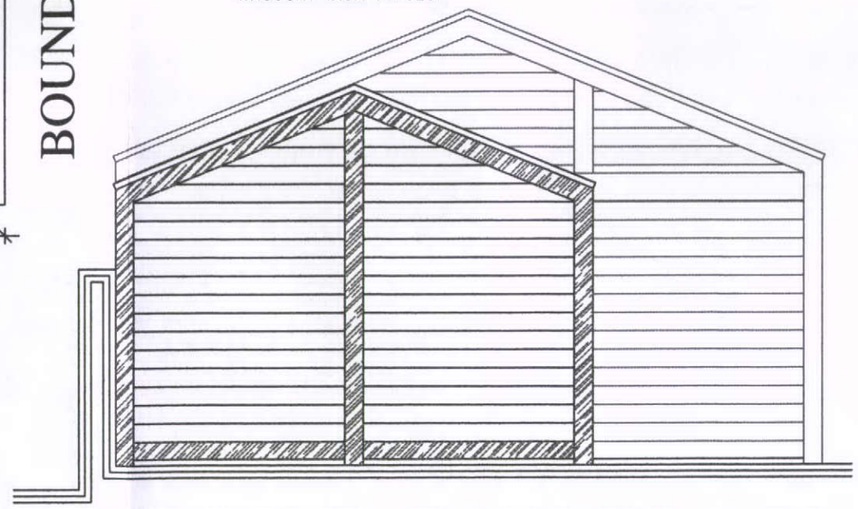

PROPOSED GABLES 1:50

PROPOSED SECTION 1:50

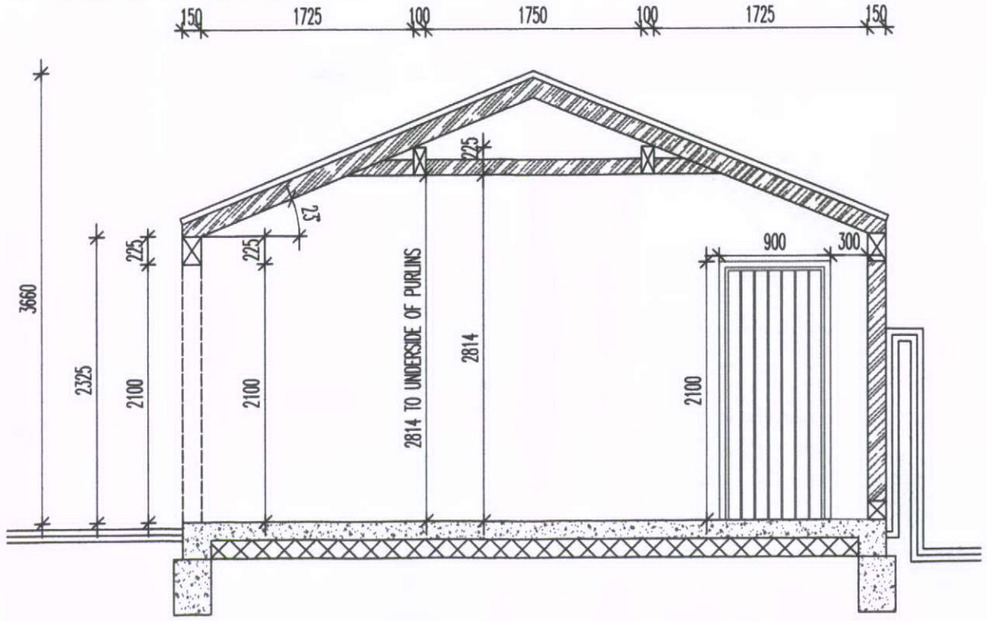

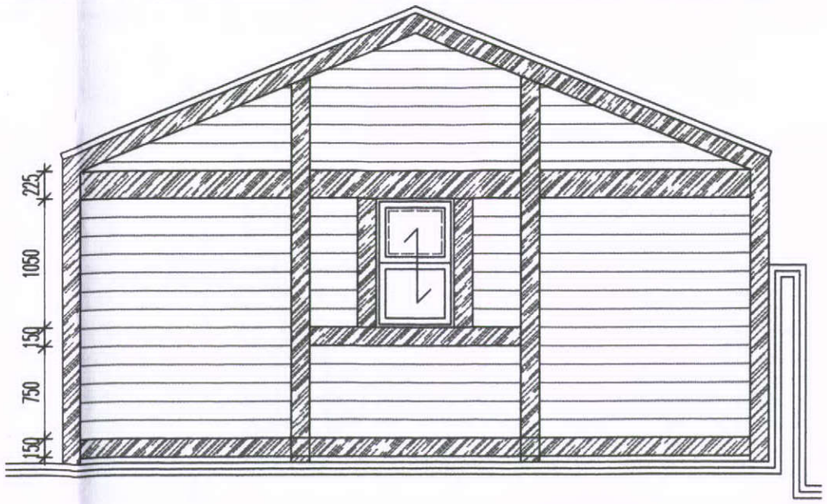

HPK/2012/0009

COUNCIL

19 JAN 2012

DWG: PROPOSED GARAGE

DAISY BANK

HOLKER ROAD, BUXTON

REVISIONS:

1:50	CHECKED:
DATE: DEC'11	DRAWN:

©THIS DRAWING AND THE BUILDING WORKS DEPICTED ARE THE COPYRIGHT OF A.J.S ARCHITECTURE AND MAY NOT BE REPRODUCED OR AMENDED EXCEPT BY WRITTEN PERMISSION. NO LIABILITY WILL BE ACCEPTED FOR AMENDMENTS MADE BY OTHER PERSONS. - DO NOT SCALE OFF DRAWING, CONFIRM ALL DIMS ON SITE

A.J.S ARCHITECTURE
32 carr road.
buxton.
derbyshire.
sk17 6wf.
h: 01298 26062
m: 07794 400237



DAISY BANK, HOLKER RD, BUXTON

GARAGE 02

DAISY BANK