HPK/2012/0142

PROPOSED EXTENSION AT 125 LOWER HAGUE, NEW MILLS.

John F. Lomas. M.R.I.C.S., M.B.Eng
Rothbury
Chapel Road
Hayfield
High Peak SK22 2JF
Tel. 01663 745186

09 MAR 2012

P 01 175 x 75 timber Purlin
P 02 175 x 75 timber Purlin
B 01 2no x 152 x 89 x 16kg U.B.s.

proposed ground floor

1 : 50

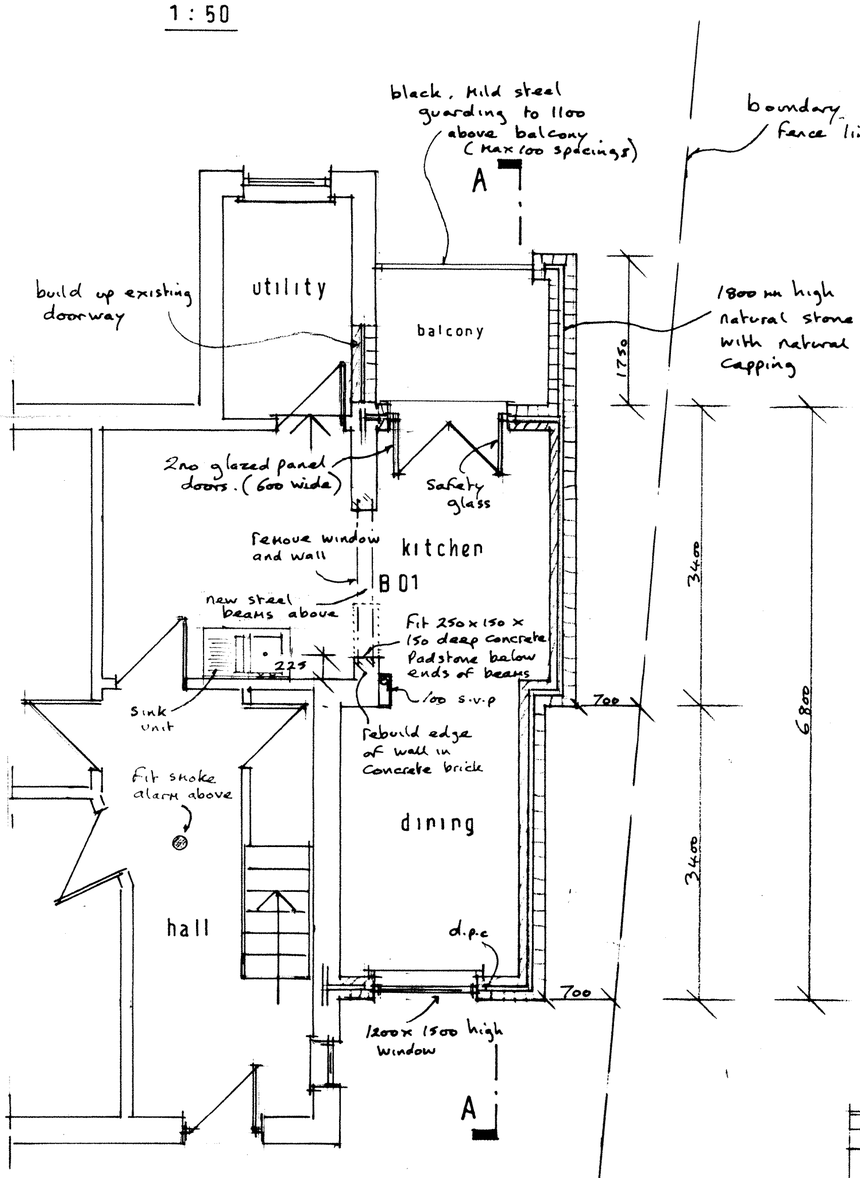

section BB

1 : 50



section AA

1 : 50

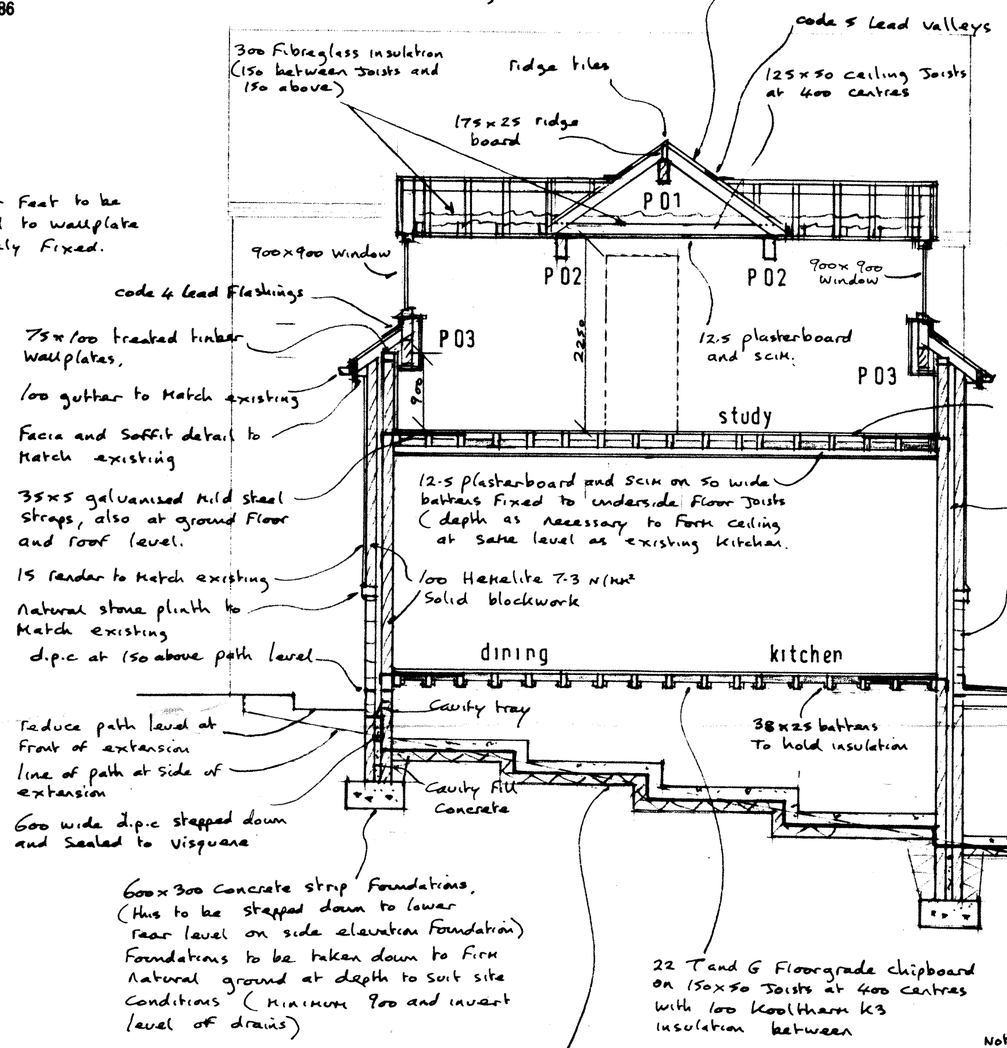

Note- rafter Feet to be birdsmouthed to wallplate and securely Fixed.

Note
rafter areas within room to have 100 Kooltherm K7 insulation board between and lining of 52.5 Kooltherm 18 dry-lining board. with plaster scim Finish

Note- all laps on Visquare d.p.m to be sealed, also lap on d.p.m to d.p.c to be sealed.

Note- provide Catnic weep vents at Cavity trays, at 1200 centres.

Note- balcony to be Formed with Promenade tiles to clients requirements, Fixed to Manufactures specification on built-up Felt roof Covering to Icopal Ltd specification, on 22 exterior grade plywood on Firrings to give 1:60 Fall to rainwater outlet, on 125 x 50 Joists at 400 centres.
Provide upstands, Flashings and rainwater outlet, to Icopal Ltd specification.

drg no 10.10/1B