



PLAN VIEW OF DOUBLE ACCESS

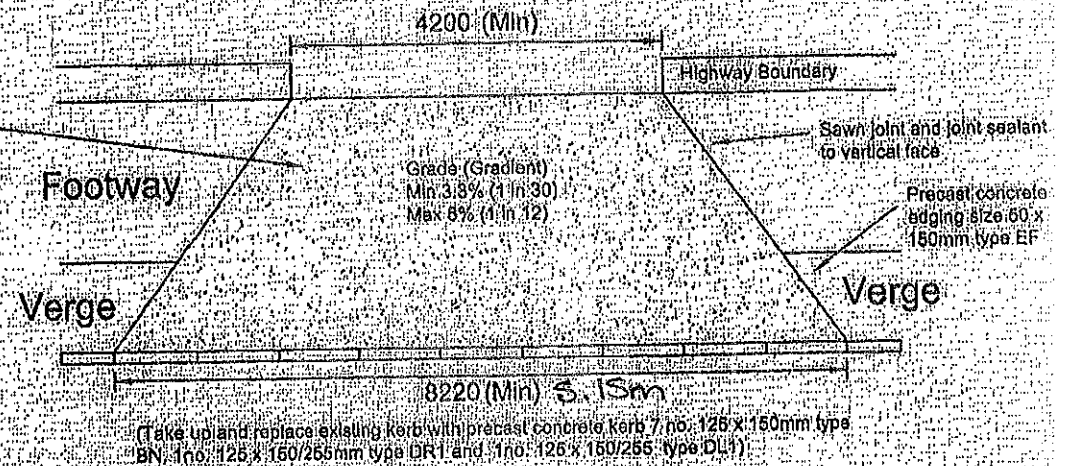

PLAN VIEW OF SINGLE ACCESS

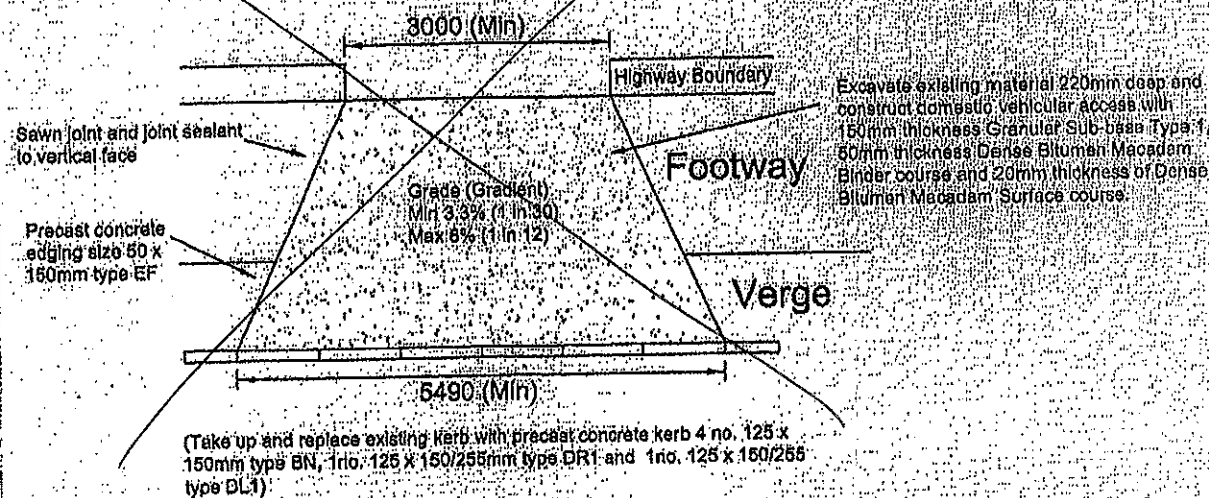

Notes

1. In cases where a verge exists between the footway and the Highway boundary, the verge shall be excavated in accordance with the above specification.
2. All kerbing shall be new pre-cast concrete, or approved lightweight kerbing, unless otherwise directed by the Area Manager in writing.
3. The maximum crossfall must not be exceeded.
4. On A and B classified roads the Planning Authority may require a pedestrian intervisibility splay within the applicants site boundary. The area required for the splay shall be constructed in accordance with the above specifications.
5. This drawing should be read in conjunction with drawing number TMC/31002.

All dimensions are in millimetres unless otherwise stated.