



WINDOW WITH CASED FRAME & SLIDING SASHES

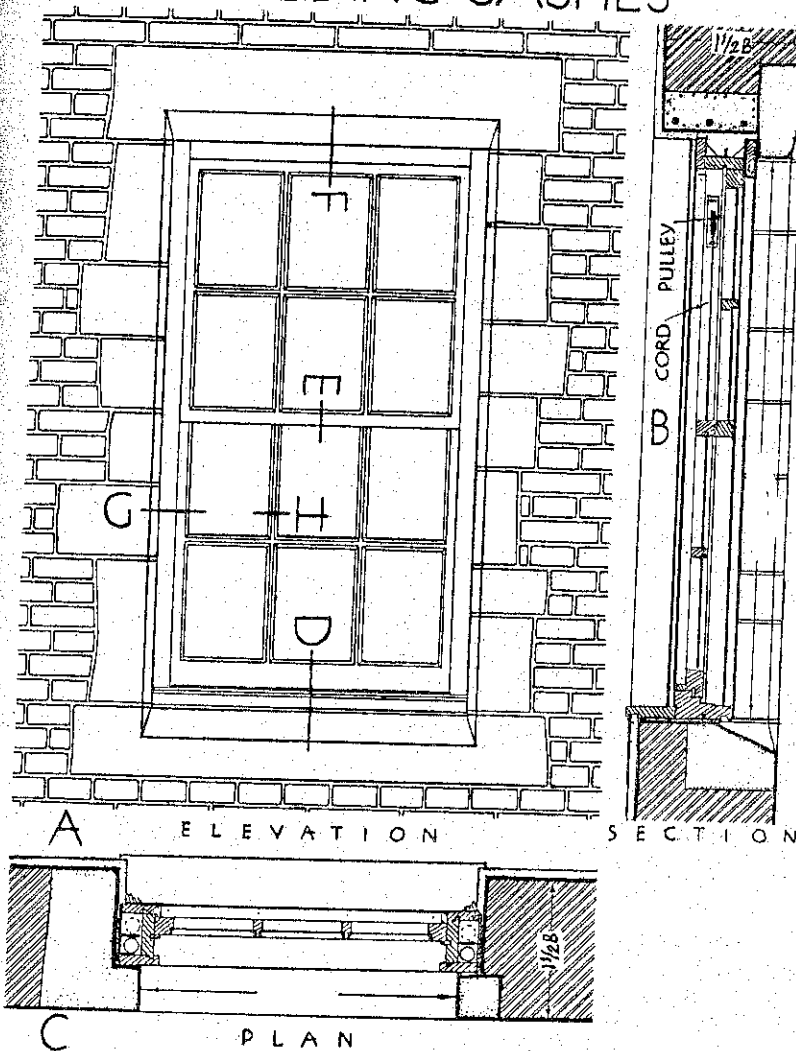

HPK/2017/0053
CONDITION 4


SHEET 1 OF 4

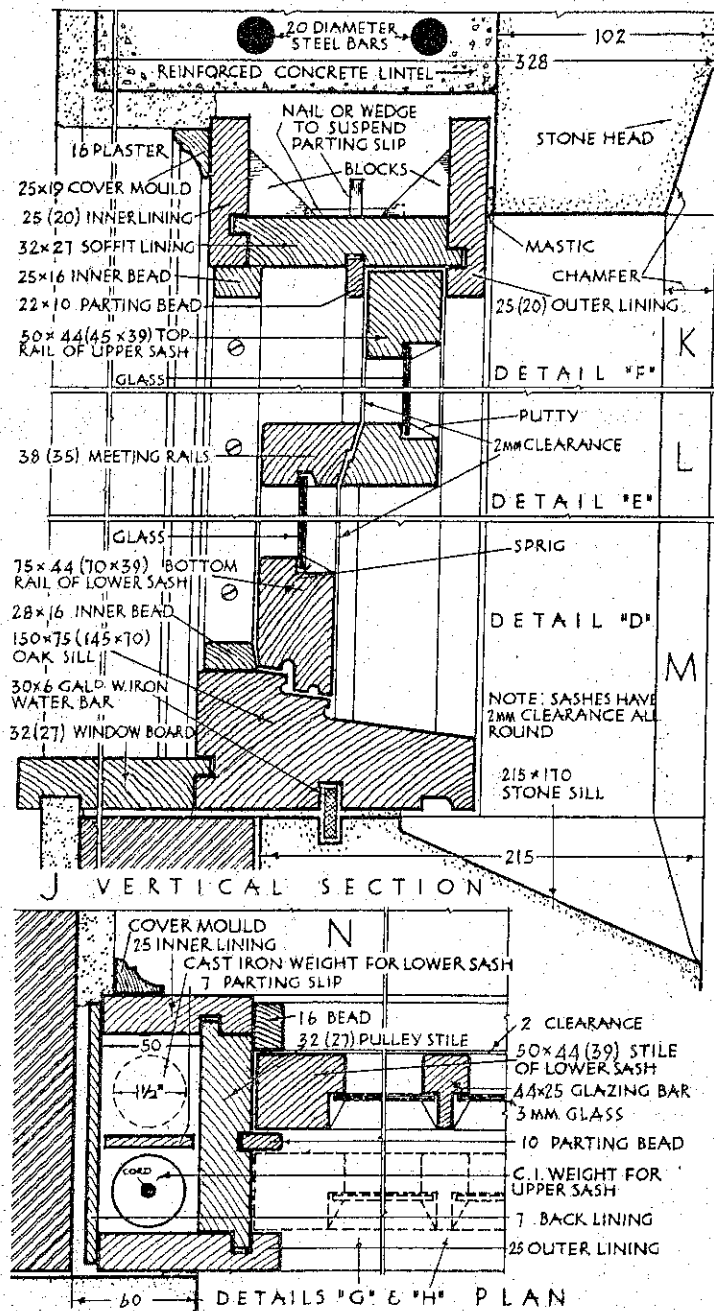

NB/ 50x50 RAILS WITH 20mm
DOUBLE GLAZED UNIT (12mm AIR GAP)

HPK/2017/0053/
SHEET 2 OF 4

FOUR PANELLED DOOR

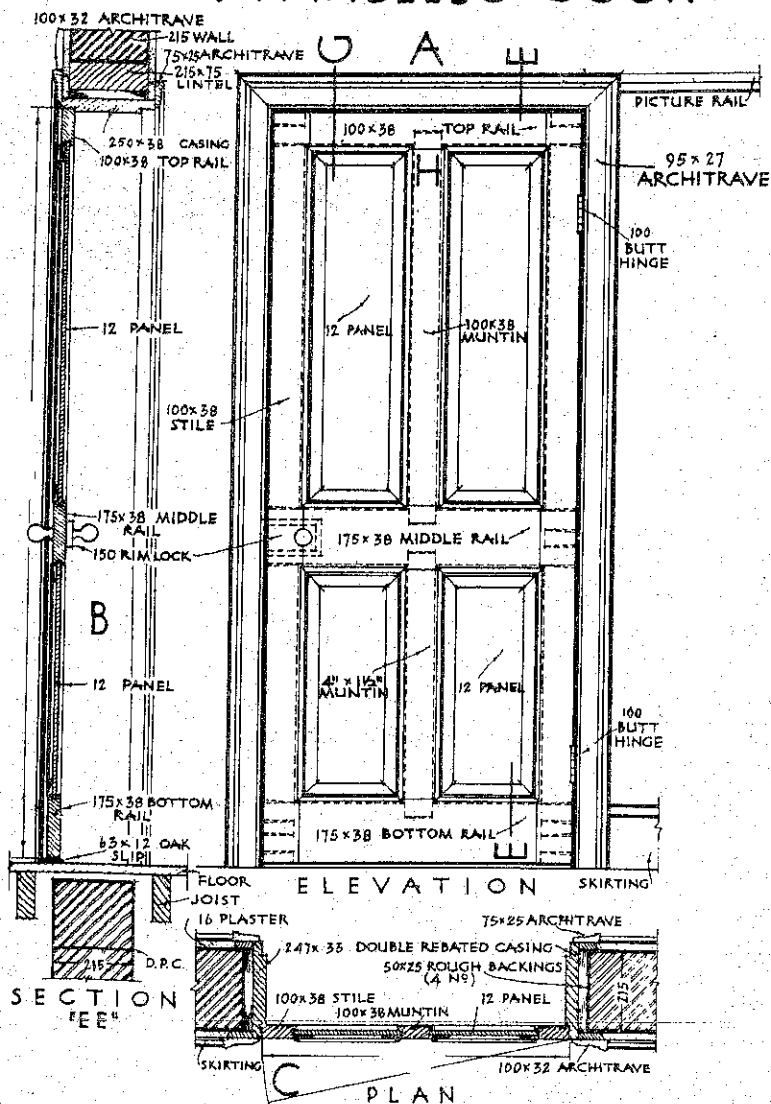

HPK/2017/0053
SHEET 3 OF 4

[illegible]

~~MOULDS CAN BE MACHINE SCRIBED~~

MOULDS MUST BE
HAND MITRED

SOLID OR STUCK MOULDINGS

NOTE: MINIMUM CLEARANCE BETWEEN GROOVE & EDGE OF PANEL IS 2 MM
WIDTH OF SOLID MouldING EQUALS DEPTH OF GROOVE - SEE BROKEN

PLANT ENDS
MOULDING

BOLECTION MOLDINGS

THIS ONE

HPK/2017/0053
SHEET 4 OF 4.