


Insulated Roof & Wall Panels

Product Data Sheet

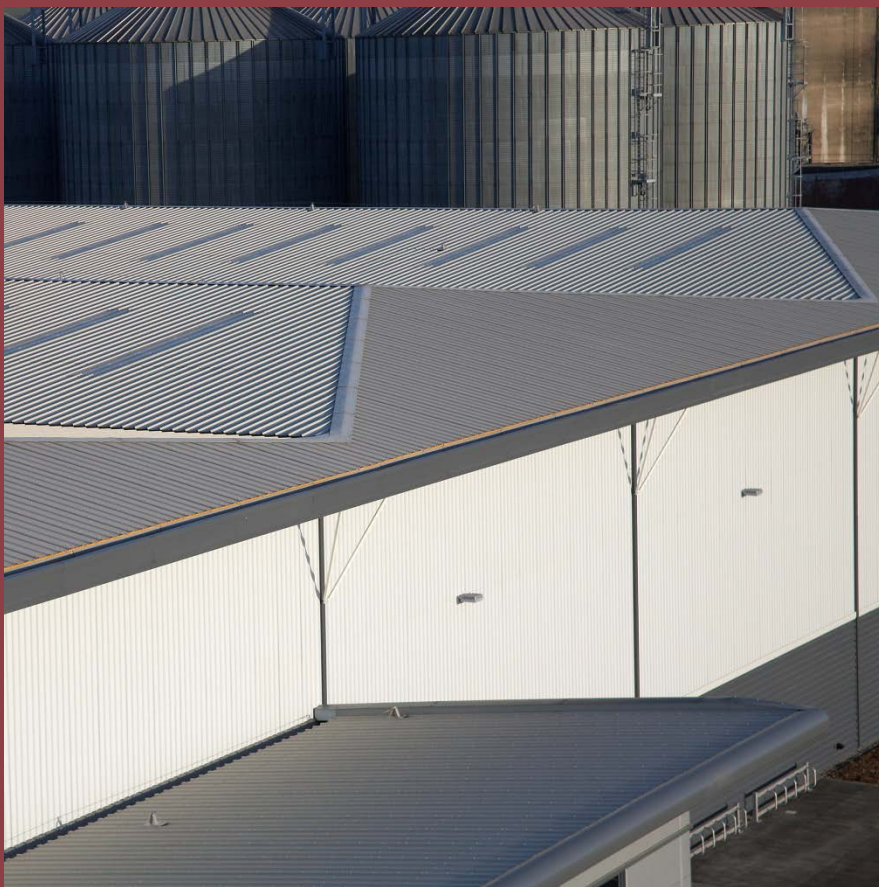

Trapezoidal Insulated Roof Panel
KS2000 RW

KS2000 RW Trapezoidal

Product Data Sheet


Applications

The KS2000 RW is a two metre wide through-fix trapezoidal profiled insulated roof panel which can be used for all building applications, where the roof slope is 4° or more after deflection.

Available Lengths

Standard Lengths	5 - 12m
Longer Lengths (non-standard)	12 – 20m
Shorter Lengths (non-standard)	Below 5m

Note: Additional costs and transport restrictions may apply for non-standard lengths. All lengths may change for export (outside of the UK).

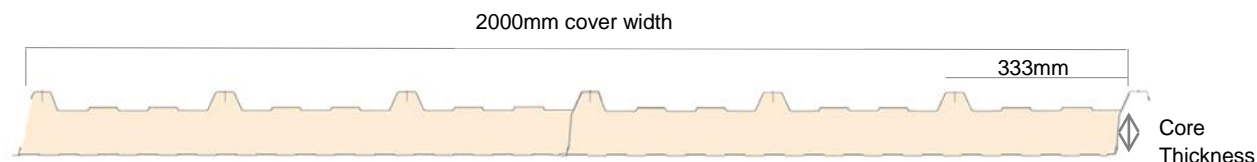

Dimensions, Weight & Thermal Performance

Core Thickness (mm)	40	50	60	70	80	100	115	120	137	150
Overall Thickness (mm)	71	81	91	101	111	131	146	151	168	181
U-value (W/m²K)	0.46	0.38	0.35	0.30	0.25	0.20	0.18	0.16	0.15	0.14
Weight kg/m² 0.5/0.4 Steel	9.9	10.3	10.7	11.0	11.5	12.3	12.8	13.1	13.7	14.2

The KS2000 RW insulated roof panels have a Thermal Transmittance (U value), calculated using the method required by the Building Regulations Part L2 (England & Wales) and Building Standards Section 6 (Scotland).

KS2000 RW Trapezoidal

Product Data Sheet

Insulation Core

KS2000 RW insulated roof panels are manufactured with an ECOsafe and FIREsafe polyisocyanurate (PIR) core.

Fire

The external and internal faces of the panel to be Class 0 in accordance with the Building Regulations when tested to BS 476: Part 6: 2009 and Part 7: 1997. The panel is rated SAA when tested to BS 476: Part 3: 2004.

This FIREsafe system has passed all the requirements of LPS 1181: 2005: Part 1: Issue 1.1, ceiling lining tests by the Loss Prevention Certification Board (LPCB) certified to LPS 1181 Grade EXT – B.



Environmental

This ECOsafe system may achieve a Green Guide A+ rating and is subject to project specific assessments.

Air Leakage

An air leakage rate of $3\text{m}^3/\text{hr}/\text{m}^2$ at 50Pa or less can be achieved when using Kingspan insulated roof and wall panels.

Acoustic

Sound Reduction Index (SRI)

Hz*	63	125	250	500	1K	2K	4K	8K
SRI (dB)	20	18	20	24	20	29	39	47

* Frequency

The KS2000 RW insulated roof panel has a single figure weighted sound reduction $R_w = 25\text{dB}$.

Biological

Kingspan panels are normally immune to attack from mould, fungi, mildew and vermin. No urea formaldehyde is used in the construction, and the panels are not considered deleterious.

Materials

Substrate

- Kingspan XL Forté, Kingspan Spectrum, Kingspan AQUAsafe, and Kingspan CLEANsafe: Material S220GD+ZA hot-dip zinc/aluminium Galfan coated steel to BS EN 10346: 2009 Standard external sheet thickness 0.5mm, standard internal sheet thickness 0.4mm.
- Bright White Polyester: Material Hot dip zinc coated to BS EN 10346: 2009, Standard internal steel thickness 0.4mm.
- Stainless Steel: Austenitic Grade 304 stainless steel to BS EN 10088: Part 2: 2005, thickness 0.4mm.

Coatings - External Weather Sheet

- Kingspan XL Forté: Consists of a multi-layer organic coating, embossed with a traditional leather-grain finish.
- Kingspan Spectrum: Consists of a coated semi-gloss finish with slight granular effect.

Coatings - Internal Liner Sheet

- Bright White Polyester: The coating has been developed for use as the internal lining of insulated panels. Standard colour is "bright white" with an easily cleaned surface.
- Kingspan AQUAsafe: The coating has been developed for use as the internal lining of insulated panels to suit high humidity internal environments (class 5 as defined by the Building Regulations).
- Kingspan CLEANsafe: The coating has been developed for use as the internal lining of insulated panels where a high level of cleanliness and hygiene is required, and the panels are to be cleaned down on a regular basis.
- Stainless Steel: The stainless steel liner has been developed for use as the internal lining of insulated panels in buildings with a very aggressive/corrosive internal environment.

KS2000 RW Trapezoidal

Product Data Sheet

Panel End Cut Back

Standard Cut Back Eaves	75mm
Minimum Cut Back	20mm
Maximum Cut Back	300mm

Note: We do not recommend end lapping the KS2000 RW insulated roof panel.

Product Tolerance

Cut to Length	-5mm +5mm
Cover Width	-2mm +2mm
Thickness	-2mm +2mm
End Square	-3mm +3mm

Handing

The KS2000 RW insulated roof panel can be manufactured in both left to right handed (LH) and right to left handed (RH)

Seals

Factory applied side & end lap weather seals.

Quality & Durability

KS2000 RW insulated roof panels are manufactured from the highest quality materials, using state of the art production equipment to rigorous quality control standards, complying with BS EN ISO 9001 standard, ensuring long term reliability and service life. The panels are also being manufactured under Environmental Management System Certification BS EN ISO 14001. Compliant to BS OHSAS 18001 Occupational Health and Safety.

Guarantee

Kingspan Total Panel Guarantee covering the structural and thermal performance for a period of up to 25 years and Kingspan Coating Guarantee for a period of up to 40 years (subject to project specific information).

Packing

KS2000 RW insulated roof panels are stacked weather sheet to liner sheet and the number per pack depends on the panel length. The top, bottom, sides and ends are protected with foam and timber packing and the entire pack is wrapped in plastic.

Sea Freight

Fully timber crated packs are available on projects requiring delivery by sea freight shipping, at additional costs. Alternatively, steel containers can be used. Special loading charges apply.

Delivery

All deliveries (unless indicated otherwise) are by road transport to project site. Off-loading is the responsibility of the client.

Site Installation Procedure

Site assembly instructions are available from Kingspan envirocare Technical Services.

KS2000 RW Trapezoidal

Product Data

Structural Tables

Unfactored load/span table (use unfactored calculated design wind load values).

Outer Sheet 0.5mm (Steel), Inner Sheet 0.4mm (Steel)

Single Span Condition

Panel Thickness (mm)	Load Types	Uniformly distributed loads kN/m ² Span L in metres							
		1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0
40	Downwards	3.25	2.28	1.80	1.31	1.04	-	-	-
	Suction	3.80	3.20	2.82	2.21	1.86	-	-	-
50	Downwards	3.85	2.77	2.22	1.67	1.35	1.03	0.84	-
	Suction	4.49	3.85	3.34	2.78	2.36	1.94	1.68	-
60	Downwards	4.41	3.25	2.64	2.03	1.67	1.30	1.07	0.84
	Suction	5.15	4.48	3.87	3.25	2.77	2.28	1.99	1.70
70	Downwards	4.92	3.68	3.02	2.35	1.95	1.54	1.28	1.01
	Suction	5.81	5.11	4.40	3.68	3.14	2.59	2.26	1.93
80	Downwards	5.42	4.12	3.40	2.68	2.24	1.80	1.51	1.22
	Suction	6.44	5.72	4.92	4.12	3.51	2.90	2.53	2.16
100	Downwards	6.32	4.90	4.10	3.30	2.80	2.29	1.95	1.61
	Suction	7.60	6.85	5.94	5.03	4.29	3.55	3.10	2.65
115	Downwards	6.32	4.90	4.10	3.30	2.80	2.29	1.95	1.61
	Suction	7.60	6.85	5.94	5.03	4.29	3.55	3.10	2.65
120	Downwards	7.05	5.74	7.74	3.96	3.34	2.83	2.40	2.05
	Suction	8.71	7.73	6.76	6.01	5.02	4.25	3.65	3.17
137	Downwards	10.27	8.47	7.08	5.98	5.09	4.36	3.75	3.24
	Suction	12.70	10.75	8.61	7.06	5.90	5.01	4.31	3.75
150	Downwards	10.27	8.47	7.08	5.98	5.09	4.36	3.75	3.24
	Suction	12.70	10.75	8.61	7.06	5.90	5.01	4.31	3.75

Double Span Condition

Panel Thickness (mm)	Load Types	Uniformly distributed loads kN/m ² Span L in metres							
		1.6	1.8	2.0	2.2	2.4	2.6	2.8	3.0
40	Downwards	2.96	2.33	1.99	1.65	1.44	1.23	1.10	0.96
	Suction	3.11	2.50	2.18	1.85	1.66	1.46	1.33	1.19
50	Downwards	3.16	2.50	2.15	1.79	1.57	1.35	1.20	1.05
	Suction	3.34	2.70	2.36	2.01	1.80	1.59	1.46	1.32
60	Downwards	3.34	2.66	2.29	1.91	1.68	1.45	1.30	1.14
	Suction	3.54	2.88	2.52	2.16	1.94	1.72	1.57	1.42
70	Downwards	3.49	2.79	2.40	2.01	1.77	1.53	1.36	1.20
	Suction	3.74	3.06	2.69	2.31	2.08	1.85	1.70	1.54
80	Downwards	3.65	2.92	2.52	2.12	1.87	1.61	1.44	1.27
	Suction	3.92	3.22	2.83	2.44	2.20	1.96	1.80	1.64
100	Downwards	3.92	3.16	2.73	2.30	2.03	1.76	1.58	1.39
	Suction	4.23	3.50	3.09	2.68	2.42	2.16	1.99	1.81
115	Downwards	3.92	3.16	2.73	2.30	2.03	1.76	1.58	1.39
	Suction	4.23	3.50	3.09	2.68	2.42	2.16	1.99	1.81
120	Downwards	4.35	3.64	3.09	2.67	2.33	2.05	1.82	1.63
	Suction	4.69	4.00	3.47	3.06	2.74	2.47	2.25	2.07
137	Downwards	5.00	4.20	3.59	3.11	2.72	2.41	2.15	1.93
	Suction	5.37	4.60	4.00	3.54	3.17	2.86	2.61	2.40
150	Downwards	5.00	4.20	3.59	3.11	2.72	2.41	2.15	1.93
	Suction	5.37	4.60	4.00	3.54	3.17	2.86	2.61	2.40

Notes:

- Values have been calculated using the method described in BS EN 14509: 2013, for medium and light coloured panels.
- Deflection limit for: downward loading is L/200 and suction loading is L/150.
- The actual wind suction load resisted by the panel is dependent on the number of fasteners used and the purlin thickness as well as the fastener material.
- The fastener calculation should be carried out in accordance with the appropriate standards. For further advice please contact Kingspan envirocare Technical Services.
- The allowable steelwork tolerance between bearing planes of adjacent supports is +/- 5mm.
- Load span tables for the panel specifications not shown are available from Kingspan envirocare Technical Services.
- FM approved panels spans must be limited to a maximum of 2 metres in single/double/multi-span condition.

Kingspan Limited

Greenfield Business Park No.2, Greenfield, Holywell, Flintshire, North Wales CH8 7GJ
t: +44 (0) 1352 716100 f: +44 (0) 1352 710161 www.kingspanpanels.com

Registered Office at Greenfield Business Park No.2, Greenfield, Holywell, Flintshire, N. Wales CH8 7GJ. Company Reg. No. 1037468