


HEAD

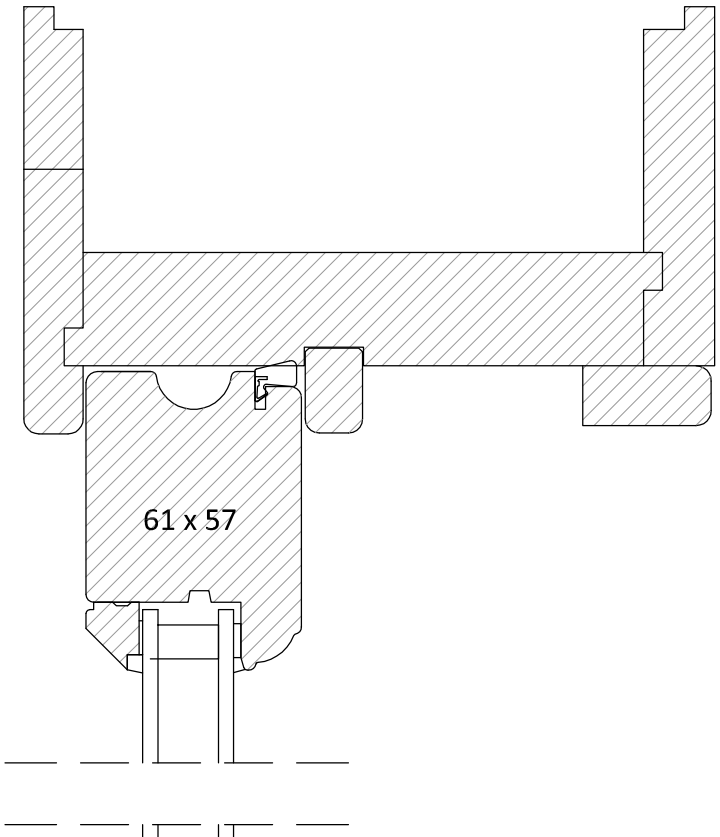

COUNTER CHECK

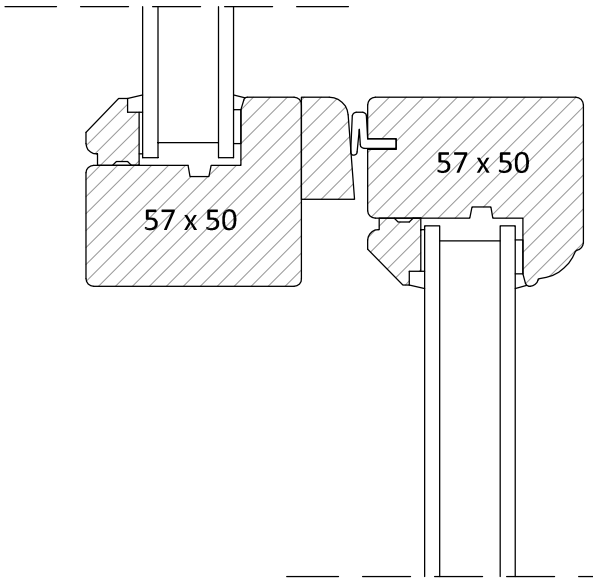


CILL

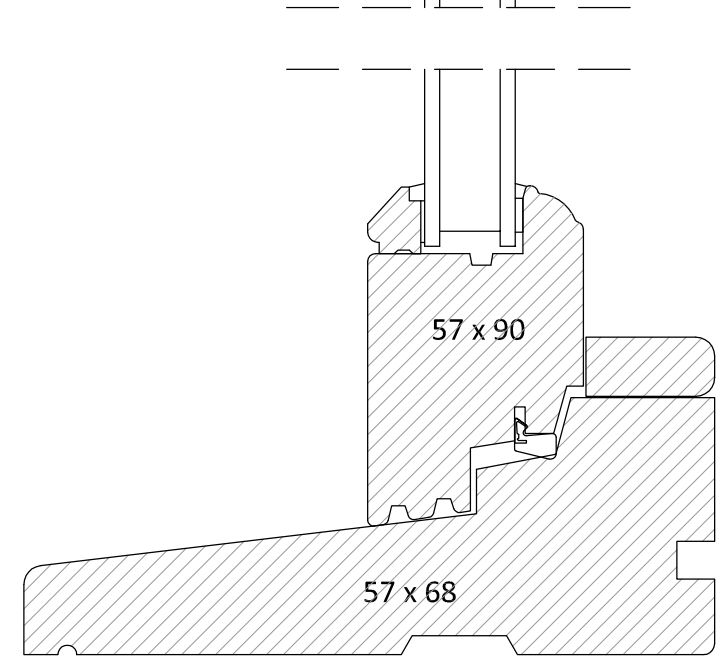

- all timber to be knotted, stopped, primed and undercoated with one coat gloss finish - colour to be brilliant white
- window to be rebated from outside of external skin by 100mm min
- cills internally to be timber
- glazing to be fully draught-proofed and double-glazed in Low emissity 'K' glass with 16mm argon filled air gap to give a U-value = 1.6W/m2.K

PLAN

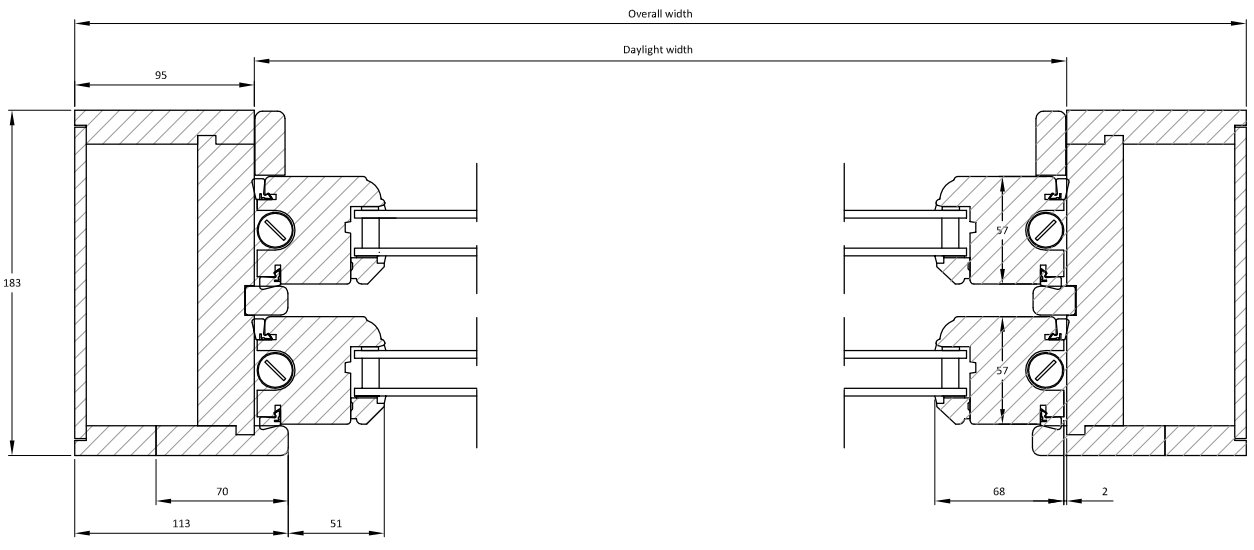

stamford wing
chartered surveyors & building consultants

Client: The Queens Arms

Project: The Queens Arms
1 Shepley St
Old Glossop

WINDOW DETAILS

Ref. J1013413

Scale @ A3: 1 : 2

Date: Aug 2013

Drwg. No. J1013413-12