


Bio-Pure 6 E Range Technical Sheet

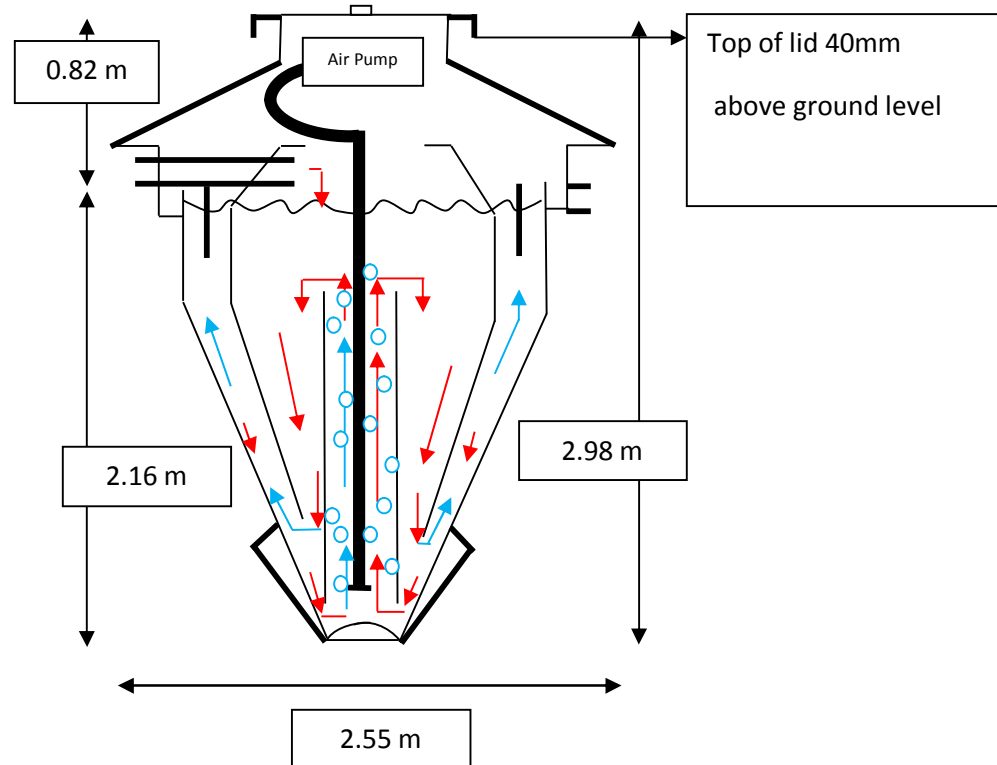

Independently Tested & Certificated to BS EN12566-3

Maximum average daily flow	5000 litres
Maximum BOD/day	1.500 g
In ground depth	2.98 m
Outside diameter	2.55 m
Inlet Invert	0.82 m
Outlet Invert	0.92 m
Weight empty	350 kg
Total capacity	5610 litres
Power consumption	130 watts

Discharge level

Biological oxygen demand (BOD)	20 mg/l
Suspended solids	30 mg/l
Ammonia (NH ₃)	20 mg/l