


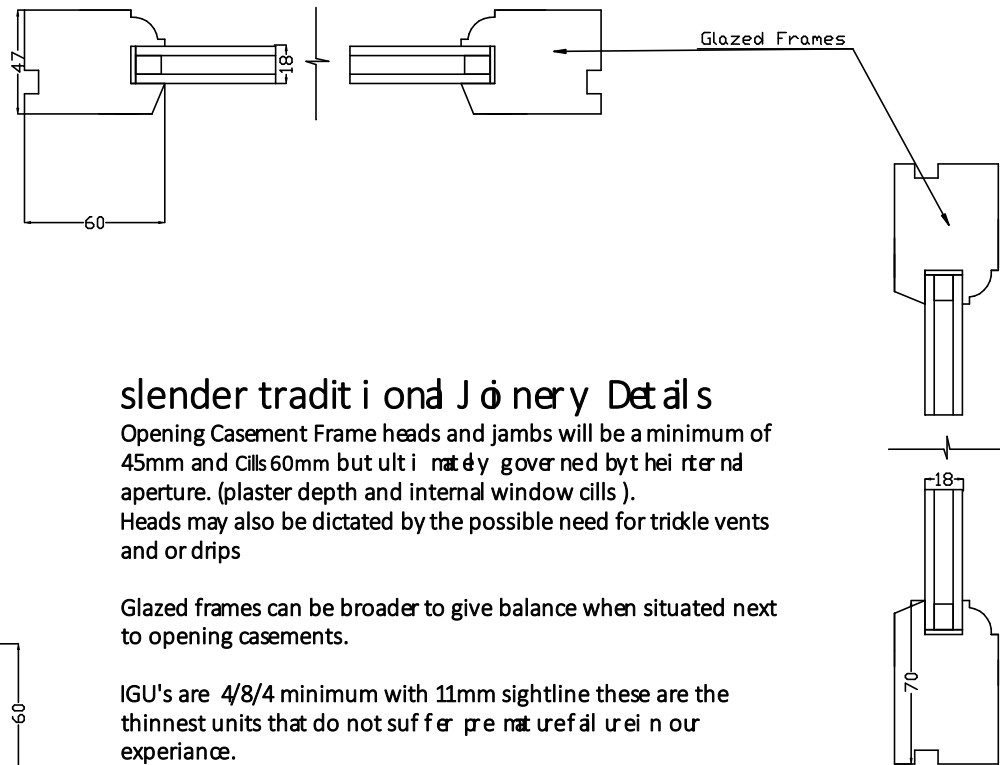

slender traditional Joinery Details

Opening Casement Frame heads and jambs will be a minimum of 45mm and Cills 60mm but ultimately governed by height and aperture. (plaster depth and internal window cills). Heads may also be dictated by the possible need for trickle vents and or drips

Glazed frames can be broader to give balance when situated next to opening casements.

IGU's are 4/8/4 minimum with 11mm sightline these are the thinnest units that do not suffer premature failure in our experience.

Rebates are 15mm to conceal any spacer bars.

frames are square to allow for hardware and the thinnest possible section size as mill bed detail can be introduced for some visual detail.

