



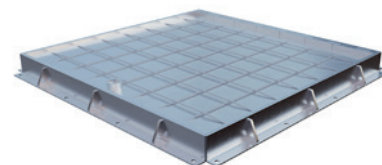

■ Features

- Custom made to ANY size
- Recessed to accommodate any type of infill
- Double EPDM Seals
- Manual, Electric or Hydraulic Options
- Can be fire rated from the underside only - up to 4 hours.



Standard Specification

■ Material

Depending on size standard specification will be either:
Aluminium
Stainless Steel Grade 304
Stainless steel grade 316

■ Cover

Recessed lid which can take a recess of up to 100mm

■ Frame

Extruded aluminium or fabricated stainless steel frame
Featuring a clad finish to the underside of the lid and a polished stainless steel top trim.

■ Hinges

Unique stainless steel hidden hinge

■ Seal

Double unbroken seal to lid.

■ Operation

Gas spring assisted opening on smaller sizes, larger hatches will be electric or hydraulic depending on loading, infill and size.

■ Locking

For Manual:
Heavy duty stainless steel slam latch (LO1)
Hold open safety stay. 'T' Operated from above. Can be operated from both sides.
For Electric: Actuators lock in position with battery back up control panel in case of emergency.


■ Finish

The exposed edges of the covers to be self colour with optional stainless steel trim




**DISCUSS YOUR PROJECT
REQUIREMENTS WITH OUR
TECHNICAL TEAM**

(+44) 1922 711185

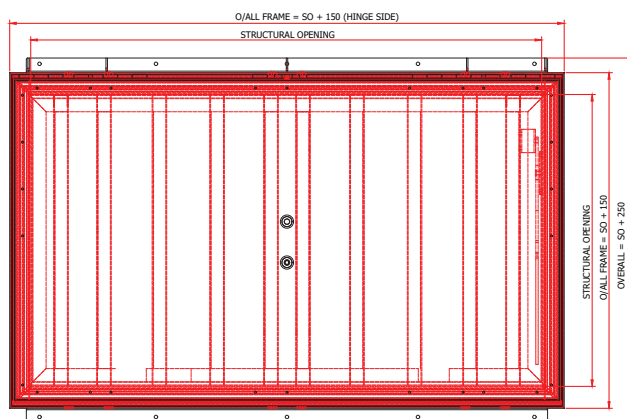

Dimensions may vary depending on requirements and specification

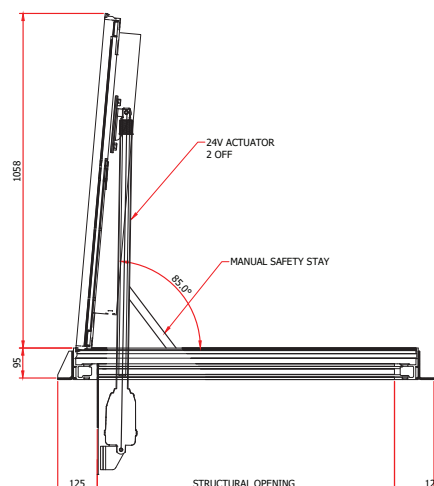

DISCUSS YOUR PROJECT
REQUIREMENTS WITH OUR
TECHNICAL TEAM

(+44) 1922 711185

Options

- Stainless Steel grade 304 or 316
- Aluminium
- Galvanised Steel

Case Studies

Fire Rated Equipment Hatch - 4050 x 2900mm

<https://youtu.be/03tkJ4pSTi0>

Sri Lanka Plant Room Access - 6500 x 4100mm

<https://youtu.be/lrjdjlrYo5s>

Basement Fire Rated Hatch - 2350 x 1950mm

<https://youtu.be/15NtMZtgacY>

Safety Grid



Loadings

- W1 Pedestrian light loading (2.5 KN/sqm)
- W2 Pedestrian medium loading (5 KN/sqm)
- W2 Pedestrian heavy loading (10 KN/sqm)
- W3 Car light loading (15 KN wheel load)
- W4 Car medium loading (25 KN wheel load)
- W5 Car heavy loading (50 KN wheel load)
- W6 Van heavy loading (65 KN wheel load)
- W7 HGV heavy loading (108 KN wheel load)
- W8 Docklands heavy loading (158 KN wheel load)

Performance

- Fire Rated up to 4 hours to:
BS EN 1634-1: 2008 and
BS EN 1363-1: 1999.
UL-EU-01074-CPR
- Acoustic Rating up to 45dB
- SureGrip Non Slip Finish

Operation

Manual

- Gas Spring Assisted
- Hold Open Stay
- Galvanised Steel

Electric

- Electric Actuators
- Control panel with 72 Hour
Battery Back Up
- Removable Actuators

Hydraulic

- Hydraulic Actuators
- Manual Hand Pump
- Electrically Driven Options

Locking Options

- LO3 Tee Lock
- LB - Locking Box
- Limit Switch
- SB - Shoot bolt
- CAML - Cam lock
- Concealed Deadlock

Electric Controls

- Control Panel
- Internal/External Key Switch
- Internal/External Push Button
- Bespoke switches can be
accommodated including Key
pads, remote control and more

Hydraulic Controls

- Manual Hand Pump & Control Panel
- Control Panel Housings
- Variety of switches for electric
- Bespoke options can be accommodated
including alarms, klaxon, contact
sensors and more.