

Axxess Ruby




Connectivity

- PoE+
- 12-24 VDC

Sensor

- 16 megapixel dual sensor approach
- Fixed lens for 1 – 12 meter coverage
- Infrared sensor 850nm
- Visual light sensor
- Infrared LED 850nm

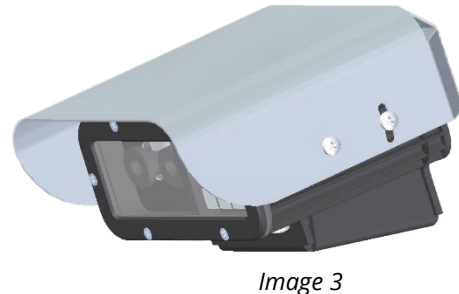

Installation

- Easy install: connector or wire, lossless zoom and drag & drop region of interest
- Integrated Wall/ Ceiling mount
- ANPR distance 1 – 12 meter
- Small dimension camera: 14,5x15x9,5cm (including sunvisor; image 3)

ANPR settings

- ANPR settings upload and download
- Lossless zoom to cover 1 – 12 meter ANPR distance
- FreeFlow, automatic in-image trigger (external loop trigger not required)
- Software trigger from backoffice
- In camera ANPR data viewer (camera status, date/time, plate cut-out, plate image, infrared and visual light full image, recognized license plate, confidence level of recognized license plate and individual characters/spacing, country, direction, vehicle type)
- ANPR latency
- Filter options: duplicates, direction and vehicle type
- Country preference, ANPR engine continental coverage
- Two camera setup
- Allow/deny list
- Easy one-button camera software update procedure
- JPEG-quality configurable
- In-image footer configuration

Confidential

ARVOO Imaging Products B.V.

Techniekweg 2, 3481 MK Harmelen, The Netherlands

Tel.: +31 348 413897 Fax: +31 348417242

Email: sales@arvoo.nl Website: www.arvoo.com

Monitoring, separate data channel

- ANPR: quality, duplicates filter and results buffer
- Network: LAN connectivity and NTP
- Hardware: Tamper alert, temperature, humidity and LED status

Protocols

- Monitoring channel
- JSON ANPR protocols
- NTP setting
- NAT settings
- Open VPN settings
- LAN settings
- Logging

Optional

- Barrier column configuration
- USB storage
- IK-09 vandalism proof
- Privacy sensitive information blurring