
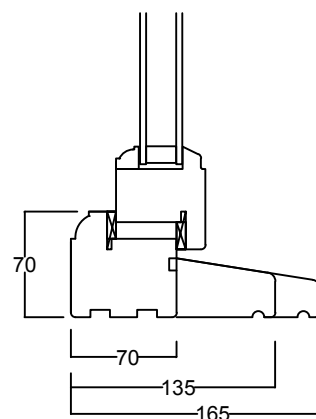

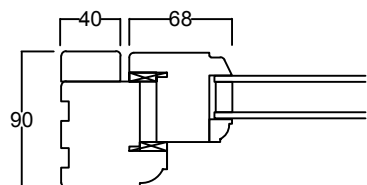


High Performance Casement Window



High Performance Casement Window Joinery Details

Opening Casement Frame heads and jambs will be a minimum of 70mm and Cills 70mm but ultimately governed by the internal aperture. (plaster depth and internal window cills).

Glazed frames can be broader to give balance when situated next to opening casements.

IGU's are 4/20/4 with 11mm sightline.

Glass rebates are 15mm to conceal spacer bars.

Bottom rails (height) are typically governed by the sash height. usually ranging from 68mm to 85mm to maintain good proportionality.

All frame types are to be fitted traditionally, this typically being 80mm back from the face of the stone opening, but will be governed by the original openings and the stonework.