
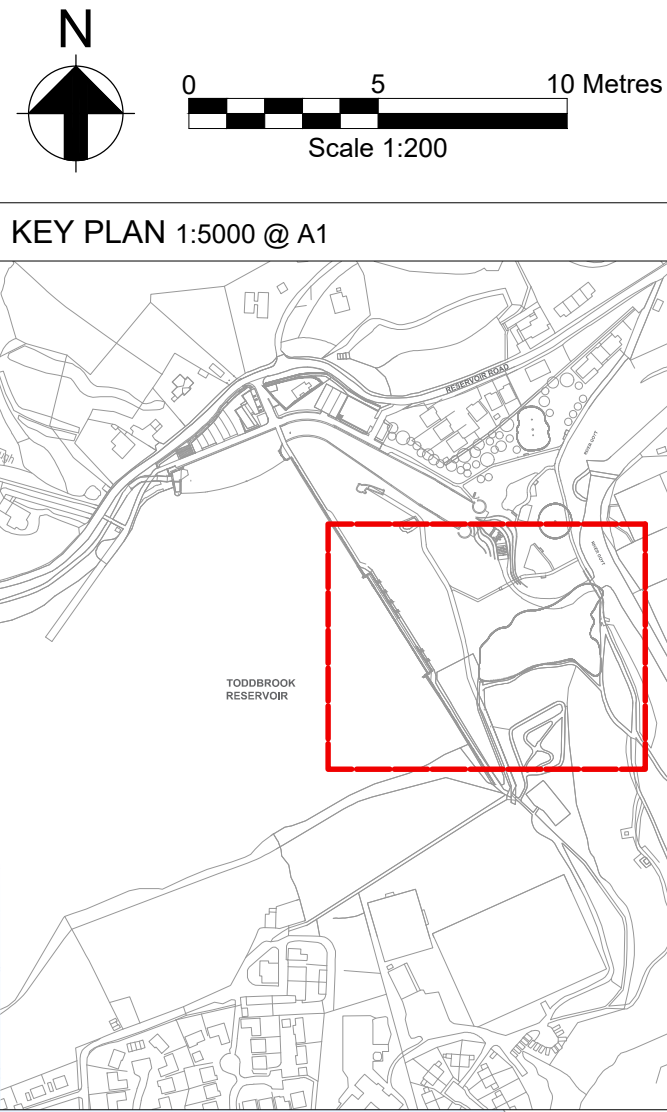
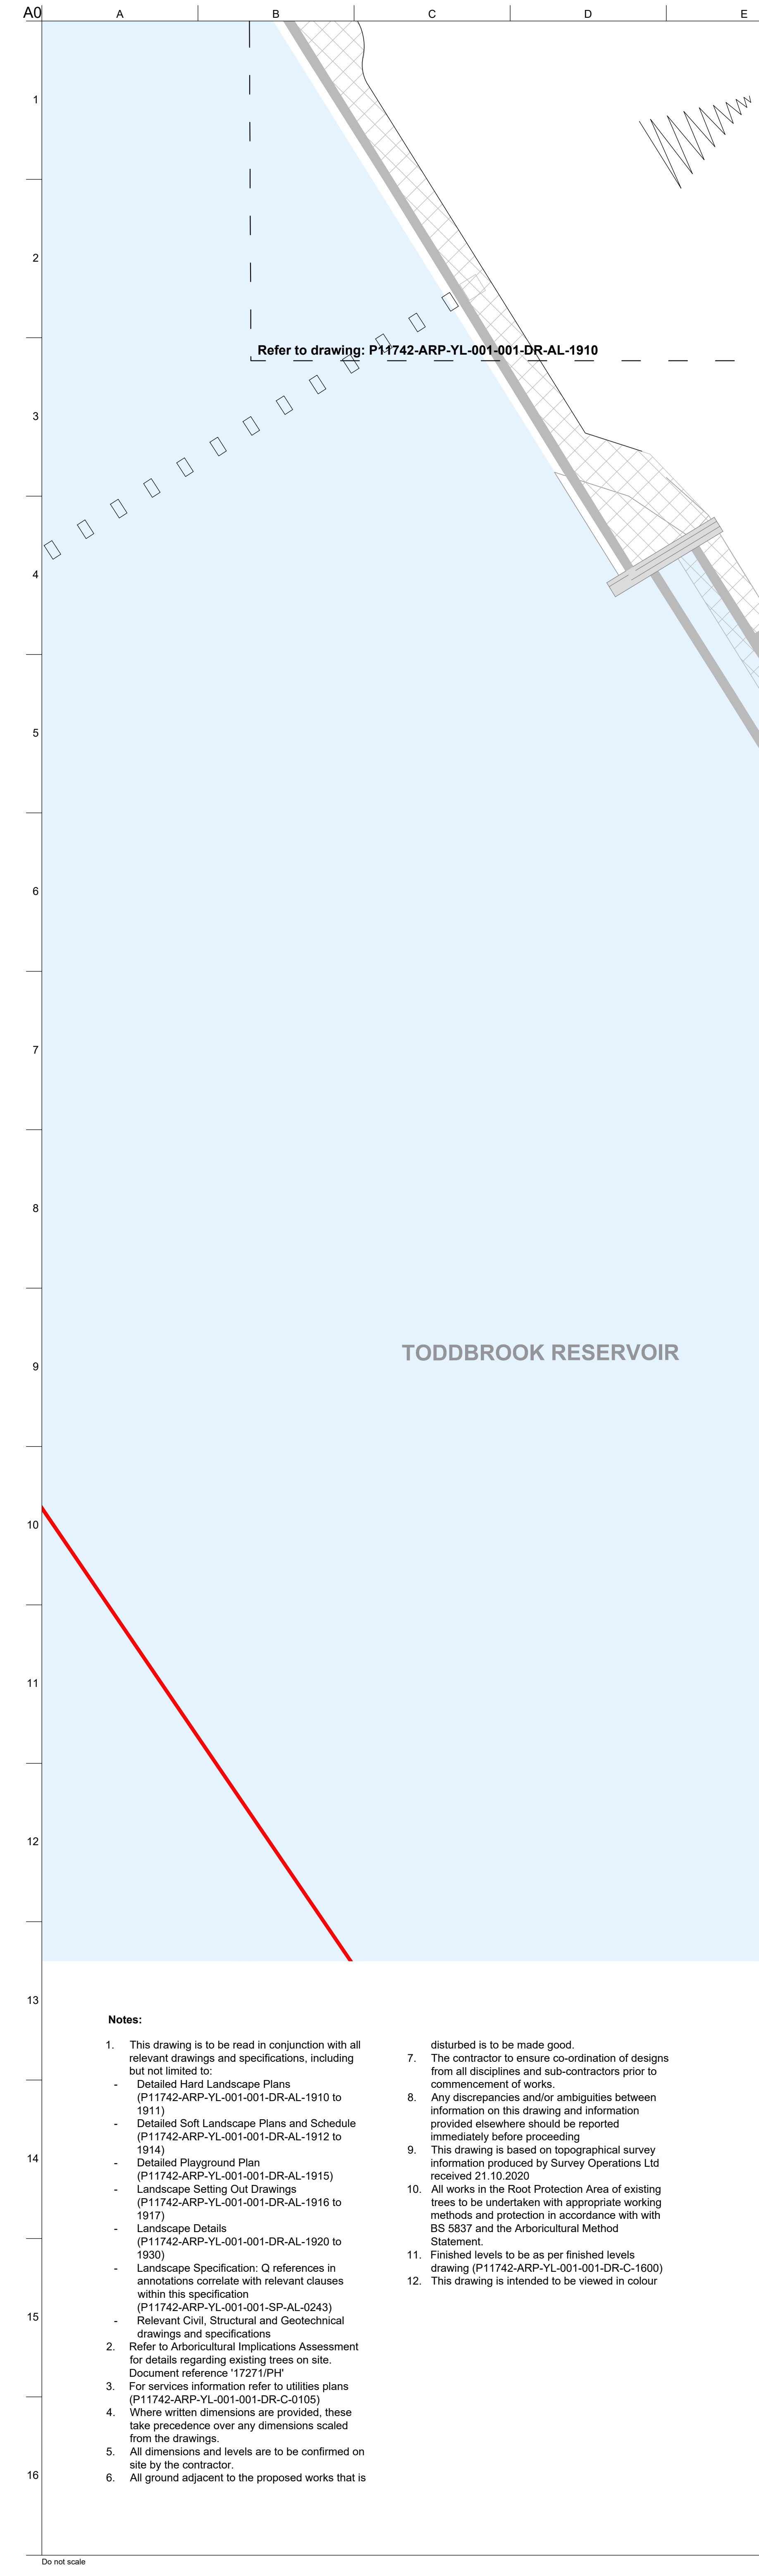


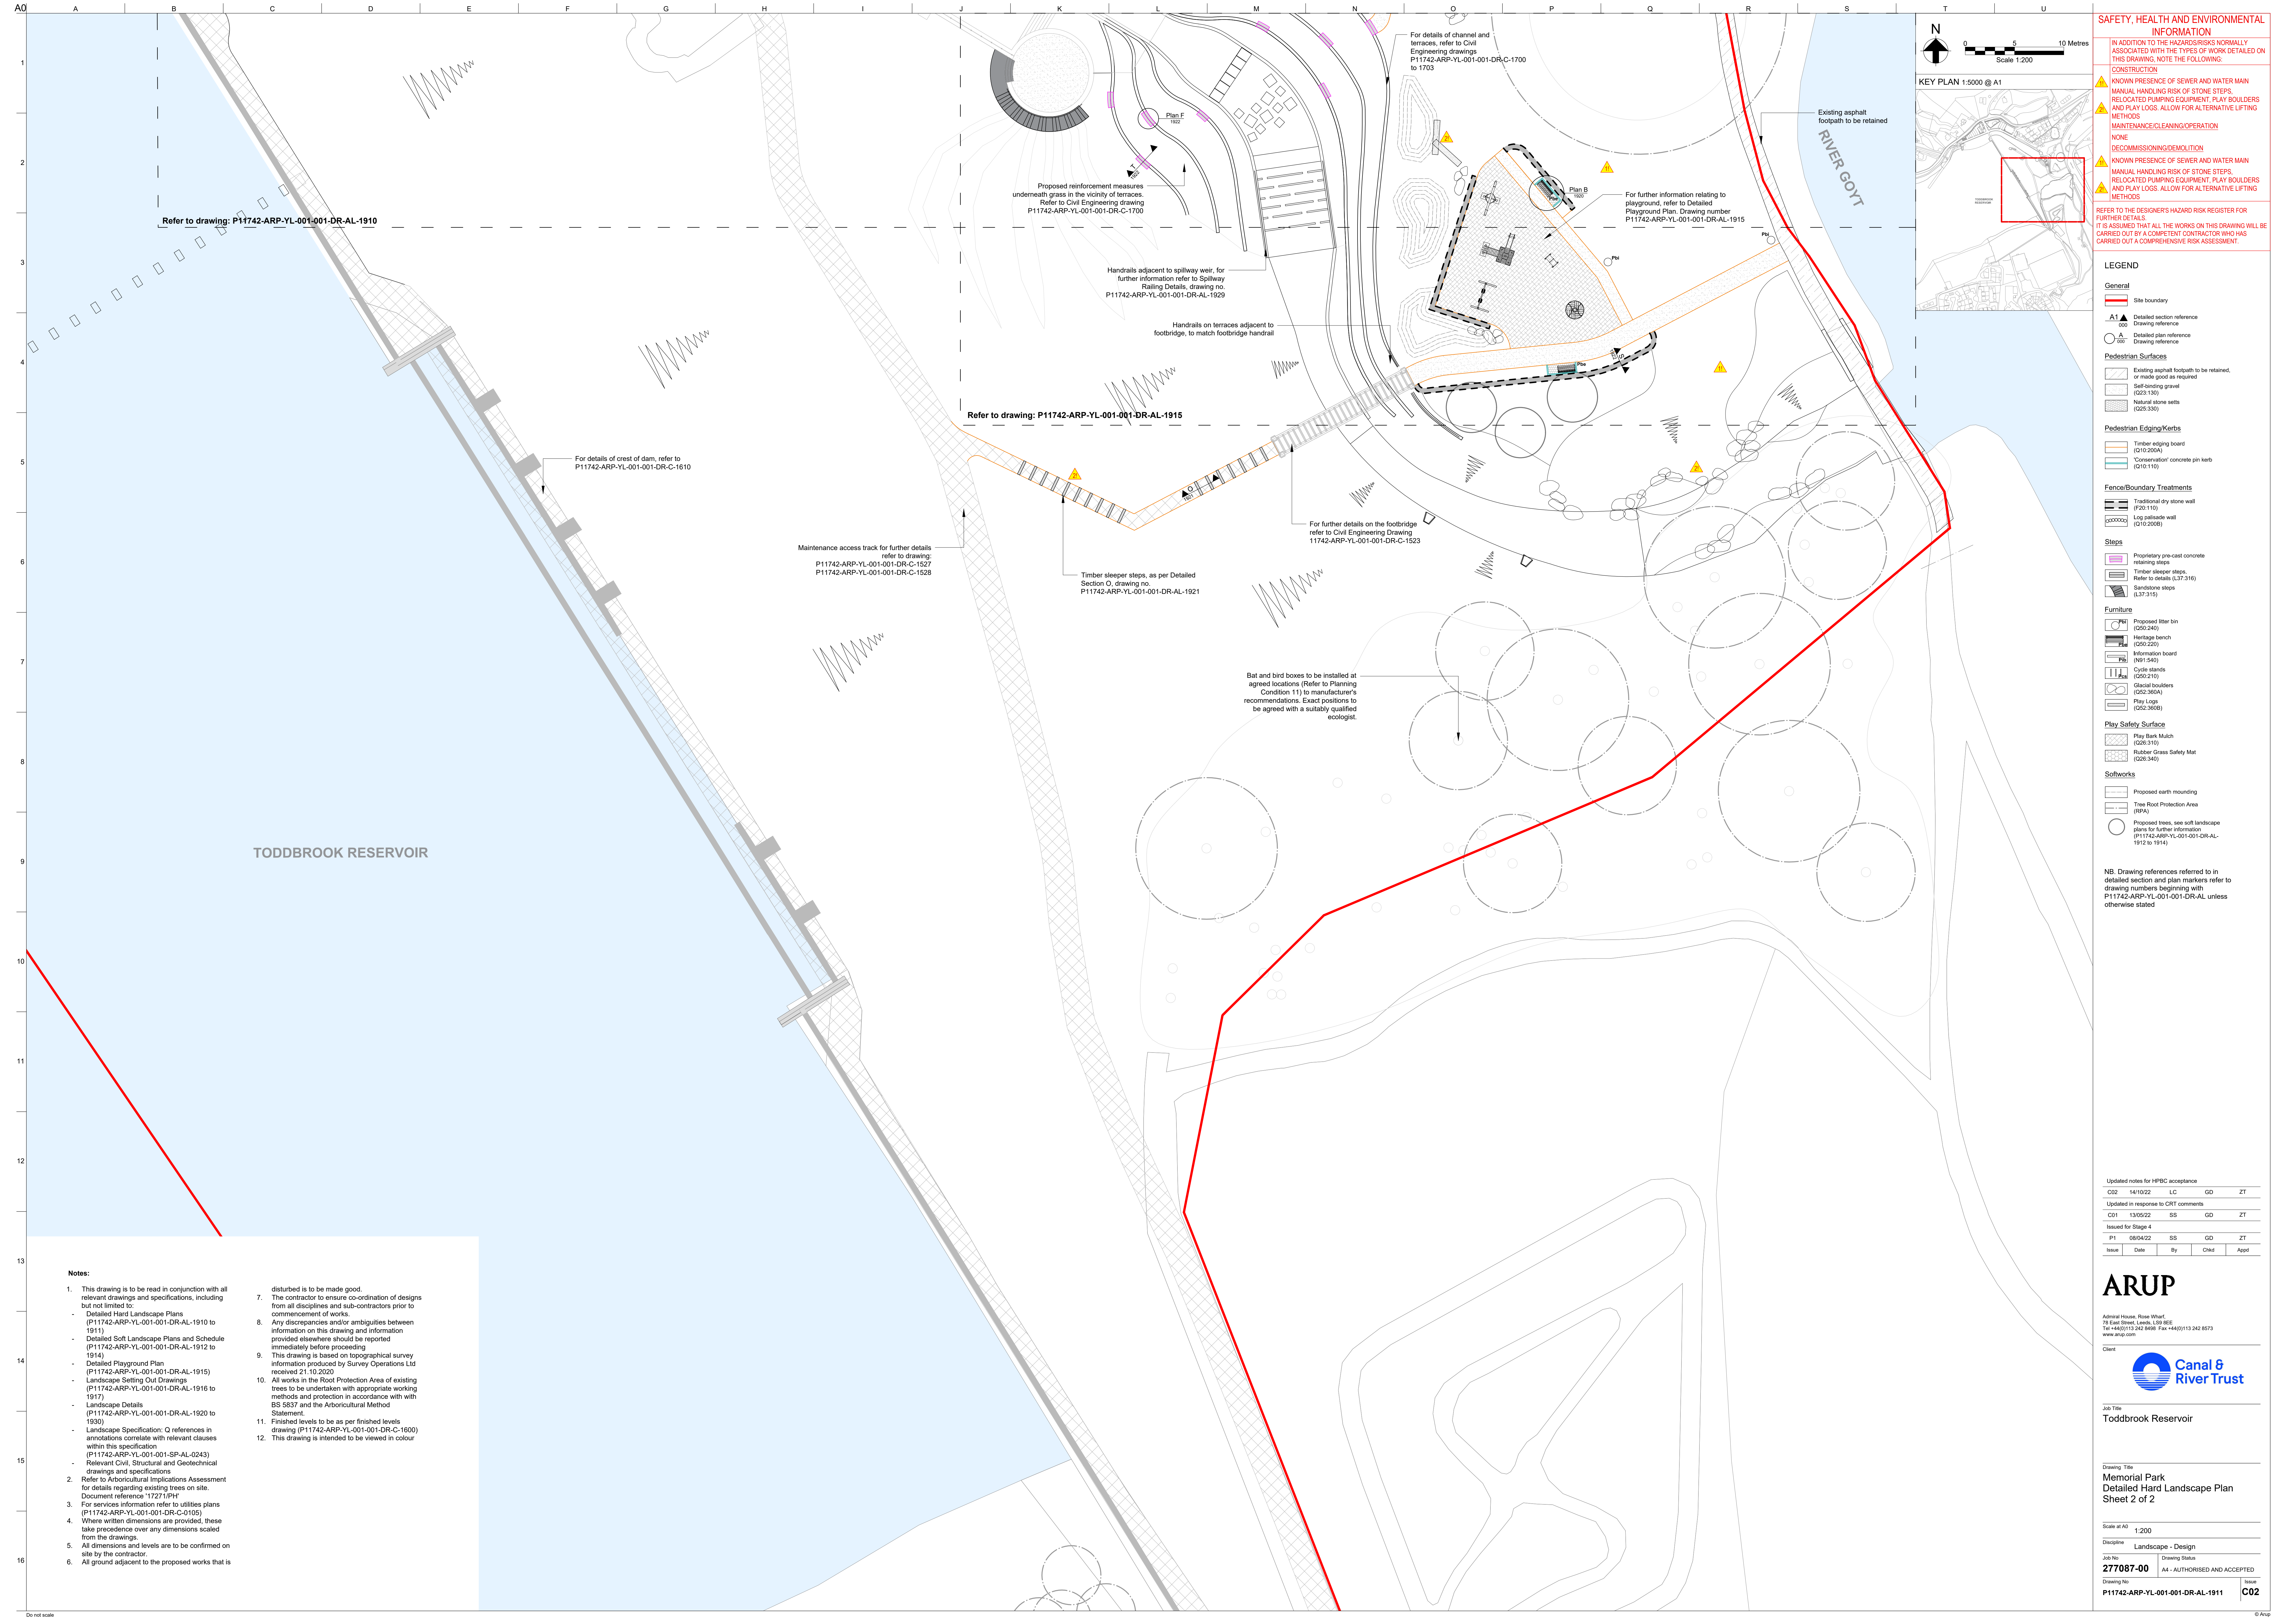

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

[IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING:

CONSTRUCTION

KNOWN PRESENCE OF SEWER AND WATER MAIN

MANUAL HANDLING RISK OF STONE STEPS, RELOCATED PUMPING EQUIPMENT, PLAY BOULDERS AND PLAY LOGS. ALLOW FOR ALTERNATIVE LIFTING METHODS

MAINTENANCE/CLEANING/OPERATION

NONE

DECOMMISSIONING/DEMOLITION

KNOWN PRESENCE OF SEWER AND WATER MAIN

MANUAL HANDLING RISK OF STONE STEPS, RELOCATED PUMPING EQUIPMENT, PLAY BOULDERS AND PLAY LOGS. ALLOW FOR ALTERNATIVE LIFTING METHODS

REFER TO THE DESIGNER'S HAZARD RISK REGISTER FOR FURTHER DETAILS.

IT IS ASSUMED THAT ALL THE WORKS ON THIS DRAWING WILL BE CARRIED OUT BY A COMPETENT CONTRACTOR WHO HAS CARRIED OUT A COMPREHENSIVE RISK ASSESSMENT.

- LEGEND**
- General**
- Site boundary
- Detail**
- ▲ Detailed section reference
 - 000 Drawing reference
 - Detailed plan reference
 - 000 Drawing reference
- Pedestrian Surfaces**
- Existing asphalt footpath to be retained, or made good as required
 - Softening gravel (G23.130)
 - Natural stone sets (G26.330)
- Pedestrian Edging/Kerbs**
- Timber edging board (G10.200A)
 - Concrete concrete pin kerb (G10.110)
- Fence/Boundary Treatments**
- Traditional dry stone wall (F20.110)
 - Log poleade wall (G10.200B)
- Steps**
- Proprietary pre-cast concrete retaining steps
 - Timber sleeper steps. Refer to details (L37.316)
 - Sandstone slabs (L37.315)
- Furniture**
- Proposed litter bin (G50.240)
 - Heritage bench (G50.220)
 - Information board (N01.540)
 - Cycle stands (G50.210)
 - Classical boulders (G52.360A)
 - Play Logs (G52.360B)
- Play Safety Surface**
- Play Bank Mulch (G26.310)
 - Rubber Grass Safety Mat (G26.340)
- Softworks**
- Proposed earth mounding
 - Tree Root Protection Area (RPA)
 - Proposed trees, see soft landscape plans for further information (P11742-ARP-YL-001-001-DR-AL-1912 to 1914)

NB. Drawing references referred to in detailed section and plan markers refer to drawing numbers beginning with P11742-ARP-YL-001-001-DR-AL unless otherwise stated

- Notes:**
- This drawing is to be read in conjunction with all relevant drawings and specifications, including but not limited to:
 - Detailed Hard Landscape Plans (P11742-ARP-YL-001-001-DR-AL-1910 to 1911)
 - Detailed Soft Landscape Plans and Schedule (P11742-ARP-YL-001-001-DR-AL-1912 to 1914)
 - Detailed Playground Plan (P11742-ARP-YL-001-001-DR-AL-1915)
 - Landscape Setting Out Drawings (P11742-ARP-YL-001-001-DR-AL-1916 to 1917)
 - Landscape Details (P11742-ARP-YL-001-001-DR-AL-1920 to 1930)
 - Landscape Specification: Q references in annotations correlate with relevant clauses within this specification (P11742-ARP-YL-001-001-SP-AL-0243)
 - Relevant Civil, Structural and Geotechnical drawings and specifications
 - Refer to Arboricultural Implications Assessment for details regarding existing trees on site. Document reference 17271/PH
 - For services information refer to utilities plans (P11742-ARP-YL-001-001-DR-C-0105)
 - Where written dimensions are provided, these take precedence over any dimensions scaled from the drawings.
 - All dimensions and levels are to be confirmed on site by the contractor.
 - All ground adjacent to the proposed works that is disturbed is to be made good.
 - The contractor to ensure co-ordination of designs from all disciplines and sub-contractors prior to commencement of works.
 - Any discrepancies and/or ambiguities between information on this drawing and information provided elsewhere should be reported immediately before proceeding
 - This drawing is based on topographical survey information produced by Survey Operations Ltd received 21.10.2020
 - All works in the Root Protection Area of existing trees to be undertaken with appropriate working methods and protection in accordance with BS 5837 and the Arboricultural Method Statement.
 - Finished levels to be as per finished levels drawing (P11742-ARP-YL-001-001-DR-C-1600)
 - This drawing is intended to be viewed in colour

Updated notes for HPBC acceptance

C02	14/10/22	LC	GD	ZT
-----	----------	----	----	----

Updated in response to CRT comments

C01	19/05/22	SS	GD	ZT
-----	----------	----	----	----

Issued for Stage 4

P1	08/04/22	SS	GD	ZT
----	----------	----	----	----

Issue	Date	By	Chkd	Appt
-------	------	----	------	------

ARUP

Admiral House, Rose Wharf,
78 East Street, Leeds, LS2 8BE
Tel +44(0)113 242 8498 Fax +44(0)113 242 8573
www.arup.com

Client

Canal & River Trust

Job Title

Toddbrook Reservoir

Drawing Title

**Memorial Park
Detailed Hard Landscape Plan
Sheet 2 of 2**

Scale at A0	1:200
Discipline	Landscape - Design
Job No	277087-00
Drawing No	AA - AUTHORISED AND ACCEPTED
Drawing No	P11742-ARP-YL-001-001-DR-AL-1911
Issue	C02