


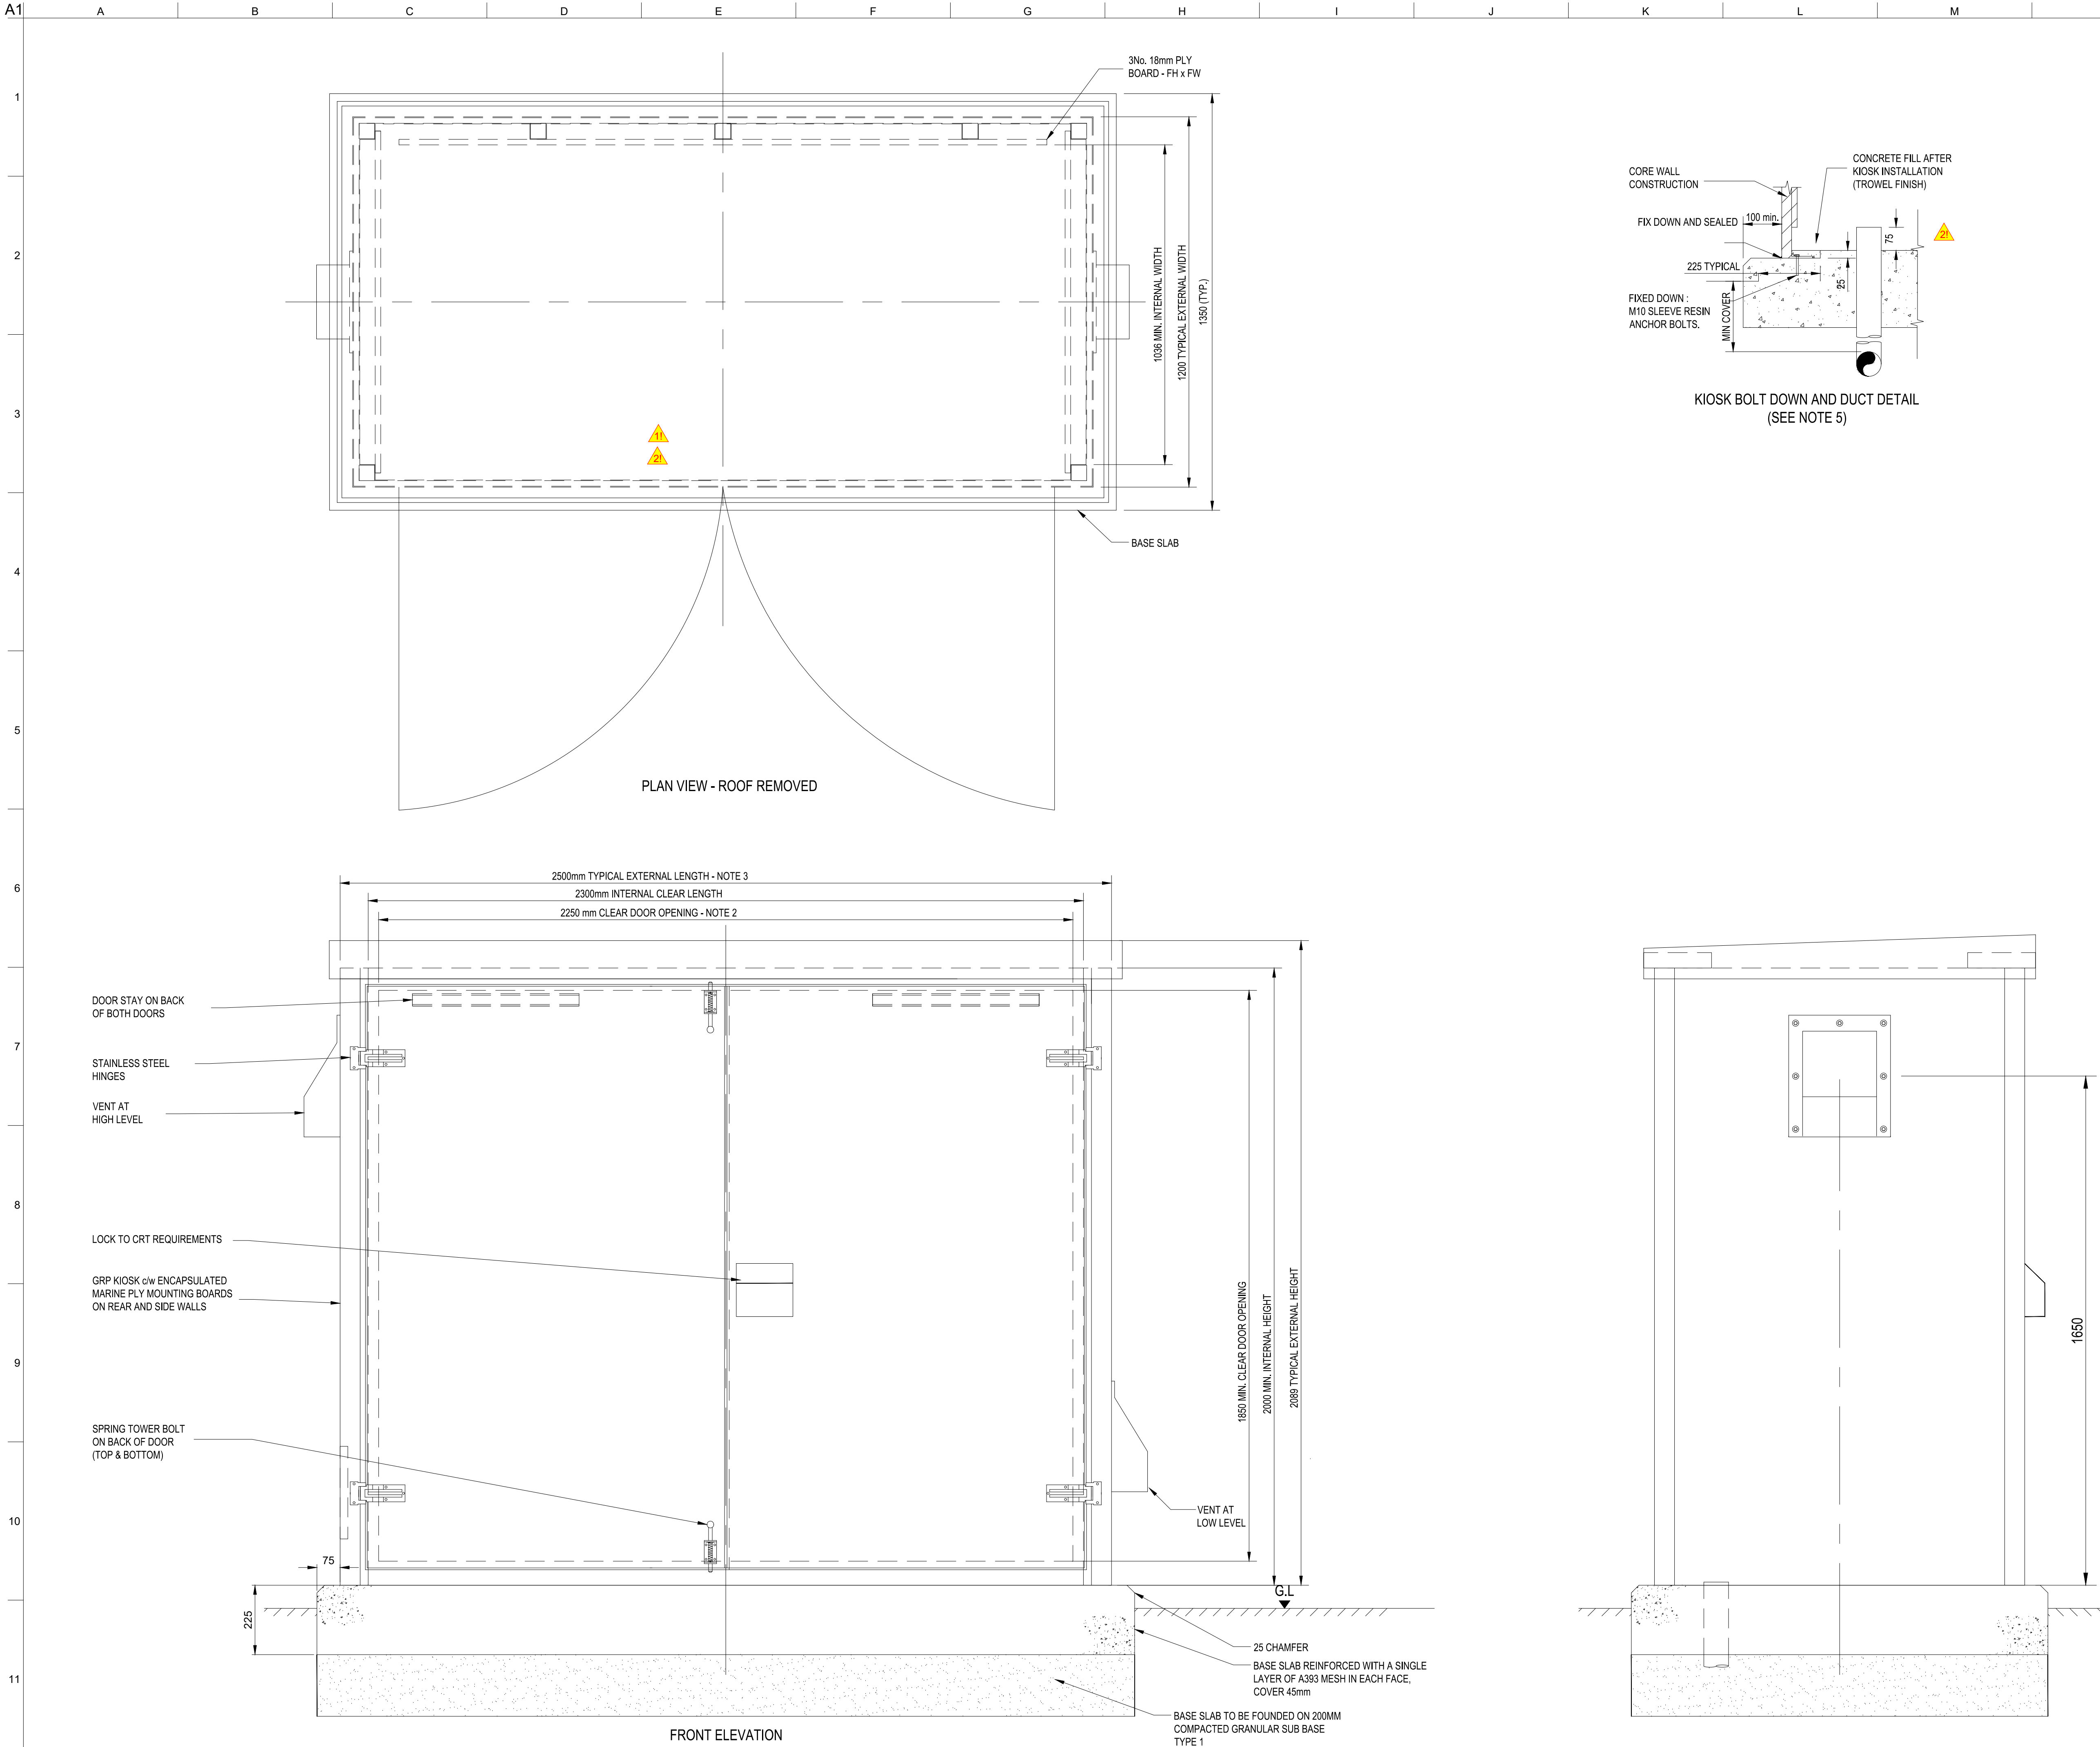

GENERAL NOTES:

- KIOSK DIMENSIONS ARE INDICATIVE, TO BE CONFIRMED BY CONTRACTOR FOLLOWING CONFIRMATION OF HYDRAULIC SYSTEM TO BE USED. FINAL KIOSK SIZE SHALL BE SUFFICIENT TO ACCOMMODATE ALL HYDRAULIC EQUIPMENT AND GIVE SUITABLE ACCESS TO EQUIPMENT FOR OPERATIONS AND MAINTENANCE. KIOSK SHOWN IS INDICATIVE BASED ON EARLY EXAMPLES OF SIMILAR SYSTEMS ONLY.
- DUCT ENTRY POSITIONS TO BE CONFIRMED WITH INPUT FROM HYDRAULIC SYSTEM SUPPLIERS BASED ON HYDRAULIC SYSTEM ARRANGEMENT AND PIPEWORK DESIGN
- EXTERNAL DIMENSIONS OF KIOSK MAY ALTER DUE TO SPECIFIC MANUFACTURER REQUIREMENTS, STANDARD RANGES OF SUPPLY, AND SECURITY STANDARD.
- KIOSK EQUIPMENT LOADING ASSUMED TO BE LESS THAN 10KPA UDL OR 5KN POINT LOAD (FACTORED LOADS)
- KIOSK CONSTRUCTION, FIXING AND INSTALLATION TO BE IN ACCORDANCE WITH CANAL AND RIVER TRUST SPECIFICATION AS-TECH-55 AND THE MECHANICAL SPECIFICATION P11742-ARP-YL-001-001-SP-C-0050.
- KIOSK TO BE CONSTRUCTED TO LPOB SR3 WITH LOCKS TO CRT REQUIREMENTS.

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION

IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING:

CONSTRUCTION

1. PRESSURISED HYDRAULIC PIPEWORK

RISK OF POLLUTION - BIODEGRADABLE OIL TO BE USED. BUNDS AND DRIP TRAYS TO BE INCORPORATED INTO DESIGN. CONCRETE TO BE SEALED TO PREVENT DEGRADATION BY OIL. DUCTS TO TERMINATE ABOVE FLOOR AND BE SEALED TO PREVENT VERMIN INGRESS. MAINTENANCE/CLEANING/OPERATION

2. PRESSURISED HYDRAULIC PIPEWORK


RISK OF POLLUTION - BIODEGRADABLE OIL TO BE USED. HOSES TO BE REPLACED UNDER PLANNED MAINTENANCE. DUCTS TO BE RESEALED FOLLOWING MAINTENANCE TO PREVENT VERMIN INGRESS

3. DECOMMISSIONING/DEMOLITION

1. PRESSURISED HYDRAULIC PIPEWORK

RISK OF POLLUTION - BIODEGRADABLE OIL TO BE USED. BUNDS AND DRIP TRAYS TO BE INCORPORATED INTO DESIGN. CONCRETE TO BE SEALED TO PREVENT DEGRADATION BY OIL. DUCTS TO TERMINATE ABOVE FLOOR AND BE SEALED TO PREVENT VERMIN INGRESS. REFER TO THE DESIGNER'S HAZARD RISK REGISTER FOR FURTHER DETAILS.

IT IS ASSUMED THAT ALL THE WORKS ON THIS DRAWING WILL BE CARRIED OUT BY A COMPETENT CONTRACTOR WHO HAS CARRIED OUT A COMPREHENSIVE RISK ASSESSMENT.



C01	30/05/22	JAH	AP	DN
ISSUED FOR DETAILED DESIGN				
Rev	Date	By	Chkd	Appd

ARUP

Admiral House, Rose Wharf,
78 East Street, Leeds, LS9 8EE
Tel +44(0)113 242 8498 Fax +44(0)113 242 8573
www.arup.com



Project Title

TODDBROOK RESERVOIR

Drawing Title

KIOSK DETAILS AND SECTIONS

Scale at A1	1:10
Role	CIVIL
Suitability	A4 - AUTHORISED AND ACCEPTED
Arup Job No	277087-00
Name	P11742-ARP-YL-001-001-DR-M-1805
Rev	C01