




SOUTH EAST ELEVATION - FRONT PHOTO n.t.s



NORTH WEST ELEVATION - REAR PHOTO n.t.s

Existing rendered chimney to be retained
Soakers, Aprons and flashings to be replaced with code 4 lead.
Gutters to rear of chimney stacks to be replaced with code 5 lead.
Existing ridge caps to be retained and reinstated.
Ridges should be back bedded in mortar and solid bedded at joints.

Area of roof to be removed and replaced with existing stone slate and 25% reclaimed stone slate to match the existing

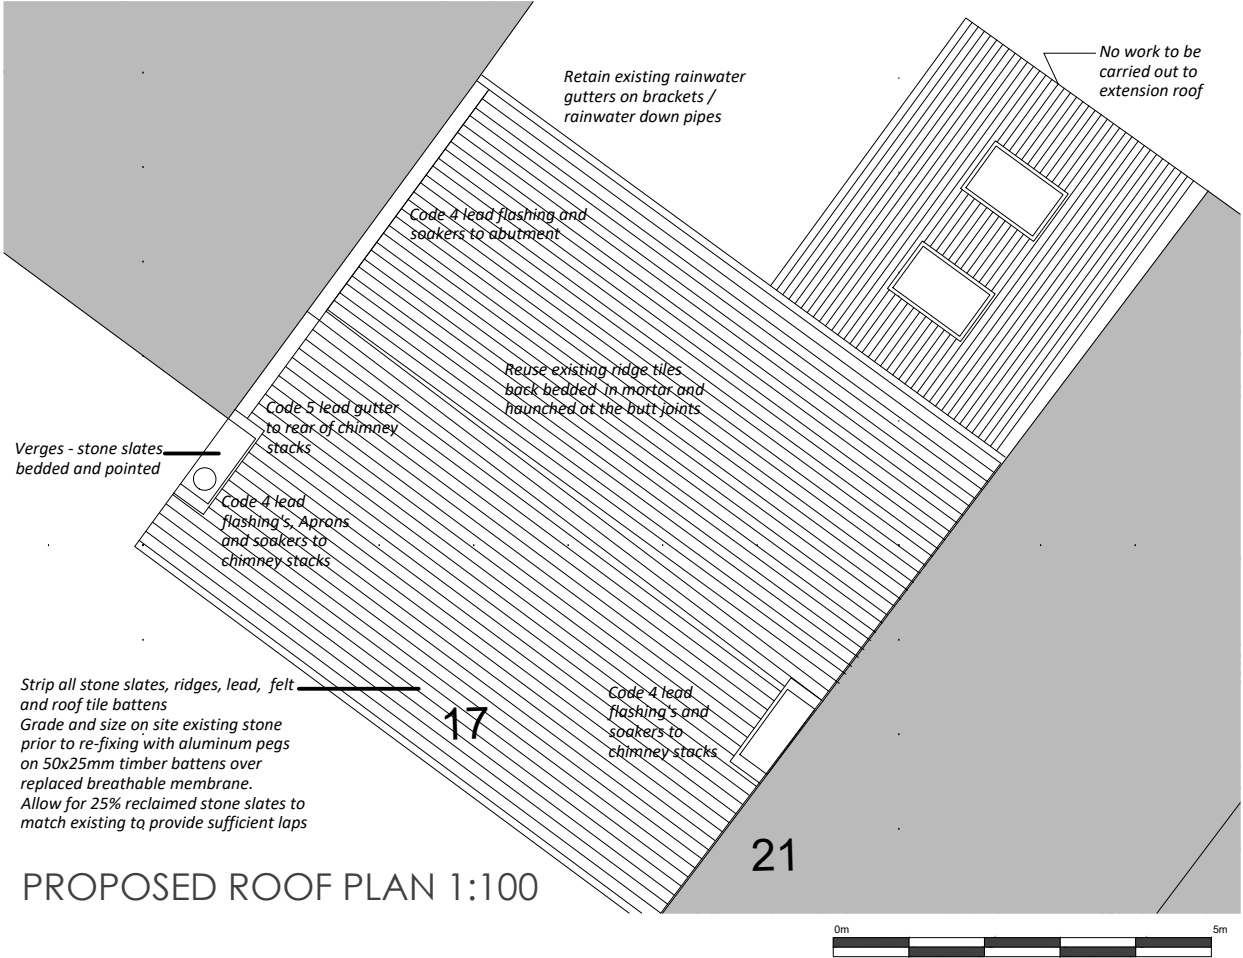

PROPOSED ROOF PLAN 1:100

Reinstate all flashings and soakers to abudments with code 4 lead
Area of roof to be removed and replaced with existing stone slate and 25% reclaimed stone slate to match the existing
All existing guttering, brackets, rain water down pipes to be retained and refitted on roof completion.



notes |

rev. description |

client	Mr M Heaton
project	RE ROOF 17 KINDER ROAD HAYFIELD
drawing title	ROOF PLAN AND ANNOTATED PHOTOS SHOWING WORK TO BE CARRIED OUT
drawing number	SW383- 002
revision	-
drawing status	PLANNING
scale	1:100 / n.t.s @A3
date	June 23
drawn by	CW
checked by	JS