


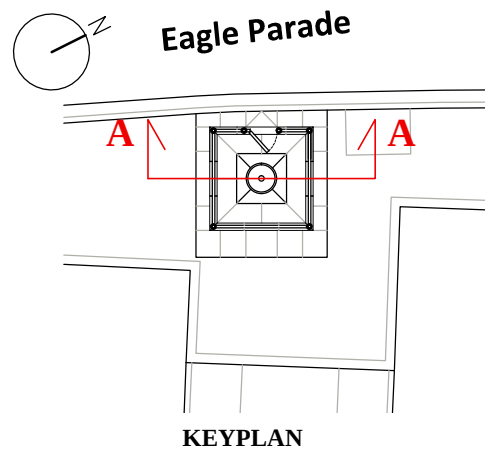

1. **Footings Supporting the Gritstone Railing Plinth** - Existing foundation stones to the railing plinth are to be reused and consolidated with supplementary stone all in hydraulic lime mortar.
2. **Cistern Plinth and Gritstone Slab Footings** [*Level A*] - original paired 1,219mm x 608mm x H194mm gritstone Cistern plinth carefully repaired and reinstated. The **cistern's gritstone slab footings** are to be retained and repaired onto a consolidated substructure.
3. **Produced Brick-Core** - Class B, Durability F2. 21 courses laid to English Bond with Queen-Closers and King-Closers to form quarter bonds between courses. Refer to drawings **P-520-1 Section AA & CC** for bond pattern. Brickwork laid with NHL.2 mortar, or a hot-mixed-lime mortar with a pozzolan.
4. **Reinforced Insitu Concrete Slab** - for the structural support of gritstone cornice. 150mm deep to structural engineers specification.
5. **Ashlar - Cenotaph** [*Levels B/C/D*] - retained ashlar repaired and indented. New gritstone components specified where the ashlar is significantly decayed. The ashlar components are jointed with stainless steel dowels and restraint cramps to the structural engineer's design, and bedded with NHL.2 mortar, or a hot-mixed-lime mortar with a pozzolan. The eastern arched ashlar panel has the Cavendish raised motif of a coiled serpent and the date 1840 in Clarendon font. The western ashlar has two bronze taps.**All new ashlar to be either Birchover Buff gritstone or Peakmoor-New Pilhough.**
6. **Gritstone Cornice** [*Level E*] - New gritstone cornice drilled to receive stainless steel urn reinforcement rod and locking nuts.
7. **Gritstone Urn Pedestal** [*Level F1*] - New gritstone urn pedestal with its bedding laid perpendicular to the ss prestressing rod.
8. **Gritstone Urn** [*Level F2*] - Existing urn-vase indented and crack repaired. Code 8 lead sheet vessel lining reinstated.
9. **Urn Lid** - Burlington Stone - Black Brathay or Kirkby lid supported on Brathay or Kirkby 'Sockets' with a stainless steel lifting socket.
10. **Gritstone Railing Plinth** - with cambered top cW195 x H395mm. Western elevation central plinth is arched to drain surface water. Gritstone plinth secured with M16 dowels at circa 250mm centres into concrete footings.
11. **Riven Gritstone Pavers** - 8no W600 x L1200mm rhomboid shaped c75mm thick. 2no at drainage arch W550 x L440mm. Pavers bedded on minimum 25mm of 50%/50% soft and sharp sand 4:1 NHL.5 lime mortar mix. 2% slope from eastern apex to western drainage arch.
12. **Cast-Iron Railings** - reinstated from documentary evidence including photographs from the DCC Buxton Museum ref DCBM100383 and 1920's Buxton Museum - Well Dressing J.R. Board photographs. The design of railings and posts appear influenced by Lewis Nockalls Cottingham's 1823 Founders Director, and typically Italianate designs of Wyattville, Basevi, Papworth, Barry. For safety reasons the railing finials have been blunted and the railing gaps are less than 100mm. An inward opening locked 'secret' gate is positioned on the western elevation. The railings are to be two-pack epoxy painted in a low-sheen in Hague Blue, or Purple-Brown.
16. **Mortar Bed** - suggest NHL3.5
18. **Urn Reinforcement Rod** - 20mm diameter SS rod with threaded ends and 50mm square x 6mm thick SS plate washers top and bottom.

This drawing and the building works depicted are the copyright of the Architect and may not be reproduced without written permission. Written dimensions should be followed.