


South South East Elevation as Proposed (1:50)



West South West Elevation as Proposed (1:50)

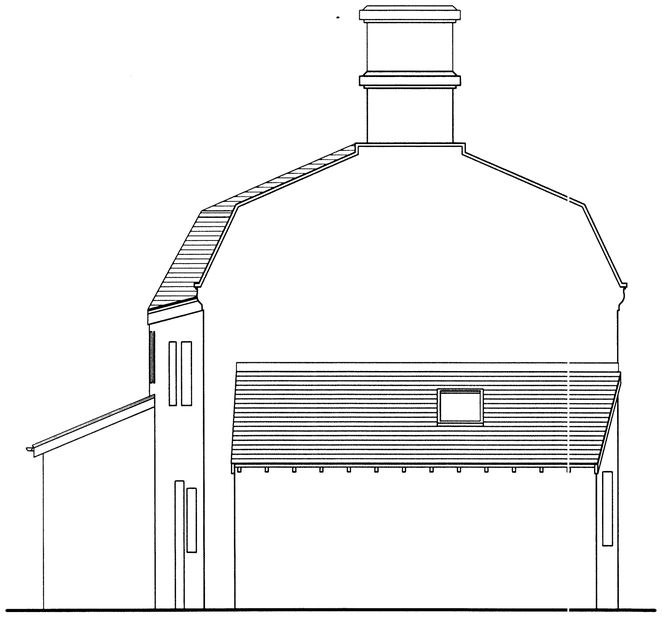

North North West Elevation as Proposed (1:50)

Materials:

New window surrounds to front elevation to be pre-cast concrete, painted to match existing.

New doors to front elevation to be gloss painted hardwood.

New end replacement windows to front elevation to be gloss painted, false-sash type, double-glazed.

External leaf of existing single storey extension to front elevation only to be rebuilt in coursed natural masonry to match existing.

Side and rear elevations to existing single storey extensions, and rest of rear elevation to be given sand cement render.

New pitched roofs to existing single storey extensions to be second-hand blue slate to match existing.

New rainwater goods to be circular section uPVC.

New end replacement windows to rear elevation to be gloss-painted softwood.

New rooflight to be Velux GGL type.

Notes:

Rear boundary wall omitted from this drawing.

PRELIMINARY

File: c:\drawings\laundry\bakers5.drw

Rev	Date	Initials	Description

PDA GROUP

PRICE DINSDALE ASSOCIATES LIMITED
8, The Quadrant, Buxton, Derbyshire
Tel. (01 298) 26 234
Fax. (01 298) 71 004

Client

Mr & Mrs S Livesey
and Ms J Miller

Job Title

Proposed Conversion of
The Bakers Arms, West Road,
to 2 No. Dwellings

Drawing Title

Elevations as Proposed

© Copyright 2010 Price Dinsdale Associates Ltd.

Scale
1 : 50

Drawing No
05

Job No
1008

Rev.