

Air Quality Assessment
Waterswallows Lane, Buxton

Client: Pennine Aggregates

Reference: 7879r1

Date: 22nd October 2024



Report Issue

Report Title: Air Quality Assessment - Waterswallows Lane, Buxton

Report Reference: 7879

Field	Report Version			
	1	2	3	4
Prepared by	Alex Crayton			
Position	Associate Director			
Reviewed by	Jethro Redmore			
Position	Director			
Date of Issue	22 nd October 2024			
Comments	-			

Serendipity Labs, Building 7, Exchange Quay, Salford, M5 3EP

info@red-env.co.uk | 0161 706 0075 | www.red-env.co.uk

This report has been prepared by Redmore Environmental Ltd in accordance with the agreed terms and conditions of appointment. Redmore Environmental Ltd cannot accept any responsibility for any use of or reliance on the contents of this report by any third party.

Executive Summary

Redmore Environmental Ltd was commissioned by Pennine Aggregates to undertake an Air Quality Assessment in support of an industrial development on land off Waterswallows Lane, Buxton.

An Air Quality Assessment was undertaken to:

- Assess potential impacts associated with fugitive dust emissions during the construction phase of the proposed development;
- Assess potential impacts associated with road transport emissions during the operational phase of the proposed development; and,
- Identify any requirement for relevant mitigation measures.

Potential construction phase impacts from fugitive dust emissions were assessed as a result of earthworks, construction and trackout activities. It is considered that the use of the identified site-specific control measures would provide suitable mitigation for a development of this size and nature and reduce potential impacts to an acceptable level.

Potential impacts during the operational phase of the proposals may occur due to road traffic exhaust emissions associated with vehicles travelling to and from the site. These were assessed using standard screening criteria. Based on the nature of the proposals, road traffic exhaust emission impacts were not predicted to be significant.

Based on the assessment results, air quality factors are not considered a constraint to planning consent for the proposals.

Table of Contents

1.0	INTRODUCTION	1
1.1	Instruction	1
1.2	Site Location and Context	1
2.0	LEGISLATION AND POLICY	3
2.1	Legislation	3
2.2	Local Air Quality Management	5
2.3	Dust	5
2.4	National Planning Policy	6
2.5	National Planning Practice Guidance	7
2.6	Local Planning Policy	8
3.0	METHODOLOGY	9
3.1	Introduction	9
3.2	Construction Phase Assessment	9
	Step 1 - Screen the Need for an Assessment	10
	Step 2 - Assess the Risk of Dust Impacts	10
	Step 3 - Site-specific Mitigation	15
	Step 4 - Determine Significant Effects	15
3.3	Operational Phase Assessment	15
4.0	BASELINE	17
4.1	Introduction	17
4.2	Local Air Quality Management	17
4.3	Air Quality Monitoring	17
4.4	Background Pollutant Concentrations	19
4.5	Sensitive Receptors	19
5.0	CONSTRUCTION PHASE ASSESSMENT	21
5.1	Introduction	21
5.2	Step 1 - Screen the Need for an Assessment	21
5.3	Step 2a - Define the Potential Dust Emission Magnitude	21
	Earthworks	21
	Construction	21
	Trackout	22
5.4	Step 2b - Define the Sensitivity of the Area	22
	Dust Soiling	22
	Human Health	22

5.5	Step 2c - Define the Risk of Dust Impacts	22
5.6	Step 3 - Site-specific Mitigation	23
5.7	Step 4 - Determine Significant Effects	24
6.0	OPERATIONAL PHASE ASSESSMENT	25
6.1	Introduction	25
6.2	Stage 1 Screening Criteria	25
6.3	Stage 2 Screening Criteria	25
7.0	CONCLUSION	27
8.0	ABBREVIATIONS	28

Appendix

Appendix 1 - Curricula Vitae

1.0 INTRODUCTION

1.1 Instruction

- 1.1.1 Redmore Environmental Ltd was commissioned by Pennine Aggregates to undertake an Air Quality Assessment in support of an industrial development on land off Waterswallows Lane, Buxton.

1.2 Site Location and Context

- 1.2.1 The site is located on land off Waterswallows Lane, Buxton, at approximate National Grid Reference (NGR): 407782, 375327. The relevant Local Authority (LA) is High Peak Borough Council (HPBC). Reference should be made to Figure 1 for a map of the site and surrounding area.

- 1.2.2 A planning application (reference: HPK/2024/0275) was submitted to HPBC for:

"Proposed change of use of agricultural land to B2 general industrial use, construction of a single building for storage and processing of sand and stone aggregate products, ancillary office space, vehicular access and turning space for HGV's, staff and visitor parking and associated hard and soft landscaping works."

- 1.2.3 Pennine Aggregates currently operate from a site located approximately 120m north of the proposed development. The development proposals form an expansion of the existing operation.

- 1.2.4 The following consultation response was received from the Environmental Health Officer at HPBC subsequent to submission of the application:

"The proposal is in close proximity to the Fairfield Road Air Quality Management Road (AQMA) and the increased future vehicle capacity has the potential to impact on the AQMA.

An air quality impact assessment is therefore required prior to determination to ensure the proposal does not have a negative impact on the Fairfield Road

AQMA."

1.2.5 As such, an Air Quality Assessment was undertaken to:

- Assess potential impacts associated with fugitive dust emissions during the construction phase of the development;
- Assess potential impacts associated with road transport emissions during the operational phase of the development; and,
- Identify any requirement for relevant mitigation measures.

1.2.6 This is detailed in the following report.

2.0 **LEGISLATION AND POLICY**

2.1 **Legislation**

2.1.1 The Air Quality Standards Regulations (2010) and subsequent amendments include Air Quality Limit Values (AQLVs) for the following pollutants:

- Nitrogen dioxide (NO₂);
- Sulphur dioxide;
- Lead;
- Particulate matter with an aerodynamic diameter of less than 10µm (PM₁₀);
- Particulate matter with an aerodynamic diameter of less than 2.5µm (PM_{2.5});
- Benzene; and,
- Carbon monoxide.

2.1.2 Air Quality Target Values were also provided for several additional pollutants. It should be noted that the AQLV for PM_{2.5} stated in the Air Quality Standards Regulations (2010) was amended in the Environment (Miscellaneous Amendments) (EU Exit) Regulations (2020).

2.1.3 The Air Quality Strategy (AQS) was produced by the Department for Environment, Food and Rural Affairs (DEFRA) and published on 28th April 2023¹. The document contains standards, objectives and measures for improving ambient air quality, including a number of Air Quality Objectives (AQOs). These are maximum ambient pollutant concentrations that are not to be exceeded either without exception or with a permitted number of exceedences over a specified timescale. These are generally in line with the AQLVs, although the requirements for the determination of compliance vary.

2.1.4 The Environmental Improvement Plan 2023² was published in January 2023, providing long term and Interim Targets in order to reduce population exposure to PM_{2.5}. The concentration target for 2040 was subsequently adopted in the Environmental Targets (Fine Particulate Matter) (England) Regulations (2023).

¹ AQS: Framework for Local Authority Delivery, DEFRA, 2023.

² Environmental Improvement Plan 2023, DEFRA, 2023.

2.1.5 Table 1 presents the AQOs and Interim Target for pollutants considered within this assessment.

Table 1 Air Quality Objectives/Interim Target

Pollutant	Air Quality Objective/Interim Target	
	Concentration ($\mu\text{g}/\text{m}^3$)	Averaging Period
NO ₂	40	Annual mean
	200	1-hour mean, not to be exceeded on more than 18 occasions per annum
PM ₁₀	40	Annual mean
	50	24-hour mean, not to be exceeded on more than 35 occasions per annum
PM _{2.5}	12 ^(a)	Annual mean

Note: (a) Interim Target to be achieved by end of January 2028.

2.1.6 Table 2 summarises the advice provided in DEFRA guidance³ on where the AQOs for pollutants considered within this report apply.

Table 2 Examples of Where the Air Quality Objectives Apply

Averaging Period	Objective Should Apply At	Objective Should Not Apply At
Annual mean	All locations where members of the public might be regularly exposed Building façades of residential properties, schools, hospitals, care homes etc.	Building façades of offices or other places of work where members of the public do not have regular access Hotels, unless people live there as their permanent residence Gardens of residential properties Kerbside sites (as opposed to locations at the building façade), or any other location where public exposure is expected to be short term
24-hour mean	All locations where the annual mean objective would apply, together with hotels Gardens of residential properties	Kerbside sites (as opposed to locations at the building façade), or any other location where public exposure is expected to be short term

³ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

Averaging Period	Objective Should Apply At	Objective Should Not Apply At
1-hour mean	All locations where the annual mean and 24 and 8-hour mean objectives apply. Kerbside sites (for example, pavements of busy shopping streets) Those parts of car parks, bus stations and railway stations etc which are not fully enclosed, where members of the public might reasonably be expected to spend one hour or more Any outdoor locations where members of the public might reasonably be expected to spend one hour or longer	Kerbside sites where the public would not be expected to have regular access

2.2 **Local Air Quality Management**

- 2.2.1 LAs are required to periodically review and assess air quality within their area of jurisdiction under the system of Local Air Quality Management (LAQM). This review and assessment of air quality involves comparing present and likely future pollutant concentrations against the AQOs. If it is predicted that levels at locations of relevant exposure, as summarised in Table 2, are likely to be exceeded, the LA is required to declare an AQMA. For each AQMA the LA is required to produce an Air Quality Action Plan, the objective of which is to reduce pollutant concentrations in pursuit of the AQOs.

2.3 **Dust**

- 2.3.1 The main requirements with respect to dust control from industrial or trade premises not regulated under the Environmental Permitting (England and Wales) Regulations (2016) and subsequent amendments, such as construction sites, is that provided in Section 79 of Part III of the Environmental Protection Act (1990). The Act defines nuisance as:

"any dust, steam, smell or other effluvia arising on industrial, trade or business premises and being prejudicial to health or a nuisance."

- 2.3.2 Enforcement of the Act, in regard to nuisance, is currently under the jurisdiction of the local Environmental Health Department, whose officers are deemed to provide an independent evaluation of nuisance. If the LA is satisfied that a statutory nuisance exists, or is likely to occur or happen again, it must serve an Abatement Notice under Part III of the Environmental Protection Act (1990). The only defence is to show that the process to

which the nuisance has been attributed and its operation are being controlled according to best practicable means.

2.4 National Planning Policy

2.4.1 The revised National Planning Policy Framework⁴ (NPPF) was published in December 2023 and sets out the Government's planning policies for England and how these are expected to be applied.

2.4.2 The purpose of the planning system is to contribute to the achievements of sustainable development. In order to ensure this, the NPPF recognises three overarching objectives including the following of relevance to air quality:

"c) an environmental objective - to protect and enhance our natural, built and historic environment; including making effective use of land, improving biodiversity, using natural resources prudently, minimising waste and pollution, and mitigating and adapting to climate change, including moving to a low carbon economy."

2.4.3 Chapter 15 of the NPPF details objectives in relation to conserving and enhancing the natural environment. It states that:

"Planning policies and decisions should contribute to and enhance the natural and local environment by:

[...]

e) preventing new and existing development from contributing to, or being put at unacceptable risk from, or being adversely affected by, unacceptable levels of soil, air, water or noise pollution or land instability. Development should, wherever possible, help to improve local environmental conditions such as air and water quality [...]"

⁴ NPPF, Ministry of Housing, Communities and Local Government, 2023.

- 2.4.4 The NPPF specifically recognises air quality as part of delivering sustainable development and states that:

"Planning policies and decisions should sustain and contribute towards compliance with relevant limit values or national objectives for pollutants, taking into account the presence of Air Quality Management Areas and Clean Air Zones, and the cumulative impacts from individual sites in local areas. Opportunities to improve air quality or mitigate impacts should be identified, such as through traffic and travel management, and green infrastructure provision and enhancement. So far as possible these opportunities should be considered at the plan-making stage, to ensure a strategic approach and limit the need for issues to be reconsidered when determining individual applications. Planning decisions should ensure that any new development in Air Quality Management Areas and Clean Air Zones is consistent with the local air quality action plan."

- 2.4.5 The implications of the NPPF have been considered throughout this assessment.

2.5 National Planning Practice Guidance

- 2.5.1 The National Planning Practice Guidance⁵ (NPPG) web-based resource was launched by the Department for Communities and Local Government on 6th March 2014 and updated on 1st November 2019 to support the NPPF and make it more accessible. The air quality pages are summarised under the following headings:

1. What air quality considerations does planning need to address?
2. What is the role of plan-making with regard to air quality?
3. Are air quality concerns relevant to neighbourhood planning?
4. What information is available about air quality?
5. When could air quality be relevant to the planning development management process?
6. What specific issues may need to be considered when assessing air quality impacts?
7. How detailed does an air quality assessment need to be?
8. How can an impact on air quality be mitigated?

⁵ <https://www.gov.uk/guidance/air-quality--3>.

2.5.2 These were reviewed and the relevant guidance considered as necessary throughout the undertaking of this assessment.

2.6 Local Planning Policy

2.6.1 The High Peak Local Plan⁶ was adopted by HPBC on 14th April 2016. A review of the document identified the following policy of relevance to the assessment:

"Policy EQ 10 - Pollution Control and Unstable Land

The Council will protect people and the environment from unsafe, unhealthy and polluted environments.

This will be achieved by:

Ensuring developments avoid potential adverse effects and only permitting developments that are deemed (individually or cumulatively) to result in the following types of pollution if any remaining potential adverse effects are mitigated to an acceptable level by other environmental controls or measures included in the proposals. This may be achieved by the imposition of planning conditions or through a planning obligation. The Council will not permit any proposal that has an adverse effect on a European site:

Air pollution (including odours or particulate emissions);

[...]."

2.6.2 The above policy was taken into consideration throughout the undertaking of the assessment.

⁶ High Peak Local Plan, HPBC, 2016.

3.0 METHODOLOGY

3.1 Introduction

3.1.1 The proposed development has the potential to cause air quality impacts during the construction and operational phases. These have been assessed in accordance with the following methodology.

3.2 Construction Phase Assessment

3.2.1 There is the potential for fugitive dust emissions to occur as a result of construction phase activities. These have been assessed in accordance with the methodology outlined within the Institute of Air Quality Management (IAQM) document 'Guidance on the Assessment of Dust from Demolition and Construction V2.2'⁷.

3.2.2 Activities on the proposed construction site have been divided into three types to reflect their different potential impacts. These are:

- Earthworks;
- Construction; and,
- Trackout.

3.2.3 The potential for dust emissions was assessed for each activity that is likely to take place and considered three separate dust effects:

- Annoyance due to dust soiling;
- Harm to ecological receptors; and,
- The risk of health effects due to a significant increase in exposure to PM₁₀.

3.2.4 The assessment steps are detailed below.

⁷ Guidance on the Assessment of Dust from Demolition and Construction V2.2, IAQM, 2024.

Step 1 - Screen the Need for an Assessment

- 3.2.5 Step 1 screens the requirement for a more detailed assessment. Should human receptors be identified within 250m from the boundary or 50m from the construction vehicle route up to 250m from the site entrance, then the assessment proceeds to Step 2. Additionally, should ecological receptors be identified within 50m of the site or the construction vehicle route up to 250m from the site entrance, then the assessment also proceeds to Step 2.
- 3.2.6 Should sensitive receptors not be present within the relevant distances then **negligible** impacts would be expected and further assessment is not necessary.

Step 2 - Assess the Risk of Dust Impacts

- 3.2.7 Step 2 assesses the risk of potential dust impacts. A site is allocated a risk category based on two factors:
- The scale and nature of the works, which determines the magnitude of dust arising as: small, medium or large (Step 2A); and,
 - The sensitivity of the area to dust impacts, which can be defined as low, medium or high sensitivity (Step 2B).
- 3.2.8 The two factors are combined in Step 2C to determine the risk of dust impacts without mitigation applied.
- 3.2.9 Step 2A defines the potential magnitude of dust emission through the construction phase. The relevant criteria are summarised in Table 3.

Table 3 Construction Dust - Magnitude of Emission

Magnitude	Activity	Criteria
Large	Earthworks	• Total site area greater than 110,000m² • Potentially dusty soil type (e.g. clay, which will be prone to suspension when dry due to small particle size) • More than 10 heavy earth moving vehicles active at any one time • Formation of bunds greater than 6m in height

Magnitude	Activity	Criteria
	Construction	- Total building volume greater than 75,000m³ - On site concrete batching - Sandblasting
	Trackout	- More than 50 Heavy Duty Vehicle (HDV) trips per day - Potentially dusty surface material (e.g. high clay content) - Unpaved road length greater than 100m
Medium	Earthworks	- Total site area 18,000m² to 110,000m² - Moderately dusty soil type (e.g. silt) 5 to 10 heavy earth moving vehicles active at any one time - Formation of bunds 3m to 6m in height
	Construction	- Total building volume 12,000m³ to 75,000m³ - Potentially dusty construction material (e.g. concrete) - On site concrete batching
	Trackout	20 to 50 HDV trips per day - Moderately dusty surface material (e.g. high clay content) - Unpaved road length 50m to 100m
Small	Earthworks	- Total site area less than 18,000m² - Soil type with large grain size (e.g. sand) - Less than 5 heavy earth moving vehicles active at any one time - Formation of bunds less than 3m in height
	Construction	- Total building volume less than 12,000m³ - Construction material with low potential for dust release (e.g. metal cladding or timber)
	Trackout	- Less than 20 HDV trips per day - Surface material with low potential for dust release - Unpaved road length less than 50m

3.2.10 Step 2B defined the sensitivity of the area around the development to potential dust impacts. The sensitivities of specific receptors are summarised in Table 4.

Table 4 Construction Dust - Sensitivities of People and Ecological Receptors

Receptor Sensitivity	Examples	
	Human Receptors	Ecological Receptors
High	- Users expect high levels of amenity - High aesthetic or value property - People expected to be present continuously for extended periods of time - Locations where members of the public are exposed over a time period relevant to the AQO for PM₁₀. e.g. residential properties, hospitals, schools and residential care homes	Internationally or nationally designated site e.g. Special Area of Conservation
Medium	- Users would expect to enjoy a reasonable level of amenity - Aesthetics or value of their property could be diminished by soiling - People or property wouldn't reasonably be expected to be present here continuously or regularly for extended periods as part of the normal pattern of use of the land e.g. parks and places of work	Nationally designated site e.g. Sites of Special Scientific Interest
Low	- Enjoyment of amenity would not reasonably be expected - Property would not be expected to be diminished in appearance - Transient exposure, where people would only be expected to be present for limited periods. e.g. public footpaths, playing fields, shopping streets, farmland, short term car parks and roads	Locally designated site e.g. Local Nature Reserve

3.2.11 The criteria for determining the sensitivity of the area to dust soiling effects on people and property is summarised in Table 5.

Table 5 Construction Dust - Sensitivity of the Area to Dust Soiling Effects on People and Property

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)			
		Less than 20	Less than 50	Less than 100	Less than 250
High	More than 100	High	High	Medium	Low
	10 - 100	High	Medium	Low	Low

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)			
		Less than 20	Less than 50	Less than 100	Less than 250
	1 - 10	Medium	Low	Low	Low
Medium	More than 1	Medium	Low	Low	Low
Low	More than 1	Low	Low	Low	Low

3.2.12 Table 6 outlines the criteria for determining the sensitivity of the area to human health impacts.

Table 6 Construction Dust - Sensitivity of the Area to Human Health Impacts

Receptor Sensitivity	Background Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from the Source (m)			
			Less than 20	Less than 50	Less than 100	Less than 250
High	Greater than 32µg/m ³	More than 100	High	High	High	Medium
		10 - 100	High	High	Medium	Low
		1 - 10	High	Medium	Low	Low
	28 - 32µg/m ³	More than 100	High	High	Medium	Low
		10 - 100	High	Medium	Low	Low
		1 - 10	High	Medium	Low	Low
	24 - 28µg/m ³	More than 100	High	Medium	Low	Low
		10 - 100	High	Medium	Low	Low
		1 - 10	Medium	Low	Low	Low
	Less than 24µg/m ³	More than 100	Medium	Low	Low	Low
		10 - 100	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low
Medium	Greater than 32µg/m ³	More than 10	High	Medium	Low	Low
		1 - 10	Medium	Low	Low	Low
	28 - 32µg/m ³	More than 10	Medium	Low	Low	Low
		1 - 10	Low	Low	Low	Low

Receptor Sensitivity	Background Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from the Source (m)			
			Less than 20	Less than 50	Less than 100	Less than 250
	24 - 28µg/m ³	More than 10	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low
	Less than 24µg/m ³	More than 10	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low
Low	-	1 or more	Low	Low	Low	Low

3.2.13 Table 7 outlines the criteria for determining the sensitivity of the area to ecological impacts.

Table 7 Construction Dust - Sensitivity of the Area to Ecological Impacts

Receptor Sensitivity	Distance from the Source (m)	
	Less than 20	Less than 50
High	High	Medium
Medium	Medium	Low
Low	Low	Low

3.2.14 Step 2C combines the dust emission magnitude with the sensitivity of the area to determine the risk of unmitigated impacts.

3.2.15 Table 8 outlines the risk category from earthworks, construction and trackout activities.

Table 8 Construction Dust - Dust Risk Category from Earthworks, Construction and Trackout Activities

Receptor Sensitivity	Dust Emission Magnitude		
	Large	Medium	Small
High	High	Medium	Low
Medium	Medium	Medium	Low
Low	Low	Low	Negligible

Step 3 - Site-specific Mitigation

3.2.16 Step 3 requires the identification of site-specific mitigation measures within the IAQM guidance⁸ to reduce potential dust impacts based upon the relevant risk categories identified in Step 2. For sites with **negligible** risk, mitigation measures beyond those required by legislation are not required. However, additional controls may be applied as part of good practice.

Step 4 - Determine Significant Effects

3.2.17 Once the risk of dust impacts has been determined and the appropriate mitigation measures identified, the final step is to determine the significance of any residual impacts. For almost all construction activity, the aim should be to control effects through the use of effective mitigation. Experience shows that this is normally possible. Hence the residual effect will normally be **not significant**.

3.2.18 The determination of significance relies on professional judgement and reasoning should be provided as far as practicable. The IAQM guidance⁹ suggests the provision of details of the assessor's qualifications and experience. These are provided in Appendix 1.

3.3 Operational Phase Assessment

3.3.1 The development has the potential to increase concentrations of NO₂, PM₁₀ and PM_{2.5} as a result of road traffic exhaust emissions associated with vehicles travelling to and from the site. An assessment was therefore undertaken using the criteria contained within the IAQM 'Land-Use Planning & Development Control: Planning for Air Quality'¹⁰ guidance to determine the potential for trips generated by the development to affect local air quality.

3.3.2 The following criteria are provided to help establish when an assessment of potential impacts on the local area is likely to be considered necessary:

A. If any of the following apply:

⁸ Guidance on the Assessment of Dust from Demolition and Construction V2.2, IAQM, 2024.

⁹ Guidance on the Assessment of Dust from Demolition and Construction V2.2, IAQM, 2024.

¹⁰ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

- 10 or more residential units or a site area of more than 0.5ha; or,
- More than 1,000 m² of floor space for all other uses or a site area greater than 1ha.

B. Coupled with any of the following:

- The development has more than 10 parking spaces; or,
- The development will have a centralised energy facility or other centralised combustion process.

3.3.3 Should these criteria not be met, then the IAQM guidance¹¹ considers air quality impacts associated with a scheme to be **not significant** and no further assessment is required.

3.3.4 Where the above criteria are met, then the assessor should proceed to assess the development proposals against the following Stage 2 screening criteria:

- The development leads to a change of Light Duty Vehicle (LDV) flows of:
 - More than 100 Annual Average Daily Traffic (AADT) within an AQMA;
 - More than 500 AADT outside of an AQMA;
- The development leads to a change of HDV flows of:
 - More than 25 AADT within an AQMA;
 - More than 100 AADT outside of an AQMA;
- Introduce a new junction that would cause traffic flow to change behaviour with respect to acceleration/deceleration or introduce queueing traffic where there previously wasn't any (such as a roundabout or traffic lights); and,
- Introduce one or more significant combustion processes where there is a risk of impact to relevant receptors.

3.3.5 Should these criteria not be met, then the IAQM guidance¹² considers air quality impacts associated with a scheme to be **not significant** and no further assessment is required.

¹¹ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

¹² Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

4.0 BASELINE

4.1 Introduction

- 4.1.1 Existing air quality conditions in the vicinity of the proposed development site were identified in order to provide a baseline for assessment. These are detailed in the following Sections.

4.2 Local Air Quality Management

- 4.2.1 As required by the Environment Act (1995), as amended by the Environment Act (2021), HPBC has undertaken Review and Assessment of air quality within their area of jurisdiction. This process has indicated that annual mean NO₂ concentrations are above the AQO within the borough. Three AQMAs have therefore been declared. The closest to the site is described as follows:

"HPBC AQMA No 3: Fairfield - The AQMA encompasses the properties on the A6 Fairfield Road and A53 Buxton between the A6 Fairfield Road /Alma Street junction through to the A53 Bridge Street and ending at the railway viaduct on the A53 Bridge Street."

- 4.2.2 The development is located approximately 1.7km north-east of the AQMA. As such, there is the potential for vehicles travelling to and from the site to increase pollution levels in this sensitive area. This has been considered throughout the assessment.
- 4.2.3 HPBC has concluded that concentrations of all other pollutants considered within the AQS are currently below the relevant AQOs. As such, no further AQMAs have been designated.

4.3 Air Quality Monitoring

- 4.3.1 Monitoring of pollutant concentrations is undertaken by HPBC throughout their area of jurisdiction. Recent NO₂ concentrations recorded in the vicinity of the development, as

provided in HPBC's '2023 Air Quality Annual Status Report (ASR)'¹³, are shown in Table 9. Exceedences of the AQO are shown in **bold**.

Table 9 Monitoring Results

Monitoring Site		Monitored NO ₂ Concentration (µg/m ³)			
		2019	2020	2021	2022
HP44	Bulls Head Fairfield NB	36.2	30.6	36.6	40.7
HP33A, HP33B	LP near 135 Fairfield Road	45.4	33.8	39.1	37.3
HP43	101 Fairfield (SB)	34.0	26.5	27.3	29.6
HP42A, HP42B	LP near 50 Fairfield, Buxton (NB)	50.3	36.5	43.7	45.5

4.3.2 As shown in Table 9, annual mean NO₂ concentrations were above the AQO of 40µg/m³ at HP44 and HP42A / HP42B in 2022. Previous exceedences of the AQO are also noted at the aforementioned sites and HP33A / HP33B in recent years. As these monitors are located at roadside locations within an AQMA, elevated results would be expected. Reference should be made to Figure 2 for a map of the survey positions.

4.3.3 Pollutant concentrations during 2021 were affected by changes to travel patterns associated with the COVID-19 pandemic. The results should therefore be viewed with caution. However, data for 2022 and beyond is now considered representative of post-pandemic conditions. This is supported by the IAQM¹⁴, who have adopted the following position:

"ambient air quality monitoring data for the year 2022 and beyond is generally considered to represent the current post-pandemic baseline."

4.3.4 Monitoring of PM₁₀ or PM_{2.5} concentrations is not undertaken within the vicinity of the site.

¹³ 2023 Air Quality ASR, HPBC, 2023.

¹⁴ Use of 2020 and 2021 Monitoring Datasets - IAQM Position Statement V1.1, IAQM, 2023.

4.4 **Background Pollutant Concentrations**

4.4.1 Predictions of background pollutant concentrations on a 1km by 1km grid basis have been produced by DEFRA for the entire of the UK to assist LAs in their Review and Assessment of air quality. The proposed development site is located in grid square NGR: 407500, 375500. Data for this location was downloaded from the DEFRA website¹⁵ for the purpose of the assessment and is summarised in Table 10.

Table 10 Background Pollutant Concentration Predictions

Pollutant	Predicted 2024 Background Pollutant Concentration (µg/m ³)
NO ₂	6.14
PM ₁₀	8.75
PM _{2.5}	5.55

4.4.2 As shown in Table 10, predicted background NO₂, PM₁₀ and PM_{2.5} concentrations are below the relevant AQOs and Interim Target at the site.

4.5 **Sensitive Receptors**

4.5.1 A sensitive receptor is defined as any location which may be affected by changes in air quality as a result of a development. Receptors sensitive to potential dust impacts during earthworks and construction were identified from a desk-top study of the area up to 250m from the development boundary. These are summarised in Table 11.

Table 11 Earthworks and Construction Dust Sensitive Receptors

Distance from Site Boundary (m)	Approximate Number of Human Receptors	Approximate Number of Ecological Receptors
Up to 20	0	0
Up to 50	10 - 100	0
Up to 100	10 - 100	-
Up to 250	10 - 100	-

¹⁵ <http://uk-air.defra.gov.uk/data/laqm-background-maps?year=2018>.

- 4.5.2 Receptors sensitive to potential dust impacts from trackout were identified from a desk-top study of the area up to 50m from the road network within 250m of the site access. These are summarised in Table 12.

Table 12 Trackout Dust Sensitive Receptors

Distance from Site Access Route (m)	Approximate Number of Human Receptors	Approximate Number of Ecological Receptors
Up to 20	10 - 100	0
Up to 50	10 - 100	0

- 4.5.3 There are no ecological receptors within 50m of the development boundary or the access route within 250m of the site entrance. As such, ecological impacts have not been assessed further within this report.
- 4.5.4 Based on the criteria shown in Table 4, the sensitivity of the receiving environment to potential dust impacts was determined as **low**. This was because the identified receptors are existing industrial buildings and processes.

5.0 CONSTRUCTION PHASE ASSESSMENT

5.1 Introduction

- 5.1.1 There is the potential for air quality impacts as a result of the construction of the proposed development. These are assessed in the following Sections.

5.2 Step 1 - Screen the Need for an Assessment

- 5.2.1 The undertaking of activities such as excavation, ground works, cutting, construction and storage of materials has the potential to result in fugitive dust emissions throughout the construction phase. Vehicle movements on the local road network also have the potential to result in the re-suspension of dust from highway surfaces.
- 5.2.2 The potential for impacts at sensitive locations depends significantly on local meteorology during the undertaking of dust generating activities, with the most significant effects likely to occur during dry and windy conditions.
- 5.2.3 The desk-study undertaken to inform the baseline identified a number of sensitive receptors within 250m of the site boundary. As such, a detailed assessment of potential dust impacts was required.

5.3 Step 2a - Define the Potential Dust Emission Magnitude

Earthworks

- 5.3.1 Earthworks will primarily involve excavating material, haulage, tipping and stockpiling, as well as site levelling and landscaping. The area of the proposed development site is between 18,000m² and 110,000m². In accordance with the criteria outlined in Table 3, the magnitude of potential dust emissions from earthworks is therefore **medium**.

Construction

- 5.3.2 Due to the size of the development, the total building volume will be between 12,000m³ and 75,000m³. In accordance with the criteria outlined in Table 3, the magnitude of potential dust emissions from construction is therefore **medium**.

Trackout

- 5.3.3 Based on the site area and existing hardstanding, it is anticipated that the unpaved road length will be between 50m and 100m. In accordance with the criteria outlined in Table 3, the magnitude of potential dust emissions from trackout is therefore **medium**.

5.4 Step 2b - Define the Sensitivity of the Area

Dust Soiling

- 5.4.1 Table 11 shows that there is more than 1 **low** sensitivity receptor within 50m of the site boundary. The sensitivity of the area with respect to dust soiling from earthworks and construction, as defined using the criteria summarised in Table 5, is therefore considered to be **low**.
- 5.4.2 Table 12 shows that there are more than 1 **low** sensitivity receptor within 20m of the road network within 250m of the site access. The sensitivity of the area with respect to dust soiling from trackout, as defined using the criteria summarised in Table 5, is therefore considered **high**.

Human Health

- 5.4.3 Table 10 shows the annual mean PM₁₀ background concentration at the site is 8.75µg/m³. As shown in Table 6, where the background annual mean PM₁₀ concentration is below 24µg/m³ and there is more than 1 **low** sensitivity receptor within 20m of the site boundary, the sensitivity of the area with respect to human health from earthworks and construction is considered to be **low**.
- 5.4.4 There is more than 1 **low** sensitivity receptor within 20m of the road network within 250m of the site access. The sensitivity of the area with respect to human health from trackout, as defined using the criteria in Table 6, is therefore considered to be **low**.

5.5 Step 2c - Define the Risk of Dust Impacts

- 5.5.1 The derived dust emission magnitude for each activity has been combined with the sensitivity of the area to determine the risk of unmitigated impacts in line with the

methodology set out in Table 8. A summary of the risk from each dust generating activity is provided in Table 13.

Table 13 Summary of Potential Unmitigated Dust Risks

Potential Impact	Risk		
	Earthworks	Construction	Trackout
Dust Soiling	Low	Low	Low
Human Health	Low	Low	Low

5.5.2 As indicated in Table 13, the potential risk of dust soiling and human health impacts is **low** from earthworks, construction and trackout.

5.5.3 It should be noted that the potential for impacts depends significantly on the distance between the dust generating activity and receptor location. Risk was predicted based on a worst-case scenario of works being undertaken at the site boundary closest to each sensitive area. Therefore, actual risk is likely to be lower than that predicted during the majority of the construction phase.

5.6 Step 3 - Site-specific Mitigation

5.6.1 The IAQM guidance¹⁶ provides potential mitigation measures to reduce impacts as a result of fugitive dust emissions during the construction phase. These have been adapted for the development site as summarised in Table 14. These may be reviewed prior to the commencement of construction works and incorporated into a Construction Environmental Management Plan (CEMP) if required by the LA.

Table 14 Fugitive Dust Emission Mitigation Measures

Issue	Control Measure
Communications	- Display the name and contact details of person(s) accountable for air quality and dust issues on the site boundary. This may be the environment manager/engineer or the site manager - Display the head or regional office contact information

¹⁶ Guidance on the Assessment of Dust from Demolition and Construction V2.2, IAQM, 2024.

Issue	Control Measure
Site management	- Record all dust and air quality complaints, identify cause(s), take appropriate measures to reduce emissions in a timely manner, and record the measures taken - Make the complaints log available to the LA upon request - Record any exceptional incidents that cause dust and/or air emissions, either on- or off- site, and the action taken to resolve the situation in the log book
Monitoring	- Carry out regular site inspections, record inspection results, and make an inspection log available to the LA upon request - Increase the frequency of site inspections when activities with a high potential to produce dust are being carried out and during prolonged dry or windy conditions
Site preparation	- Plan site layout so that machinery and dust causing activities are located away from receptors, as far as is possible - Erect solid screens or barriers around dusty activities or the site boundary that are at least as high as any stockpiles on site - Avoid site runoff of water or mud
Operating vehicle/machinery and sustainable travel	- Ensure all vehicles switch off engines when stationary - no idling vehicles - Avoid the use of diesel or petrol powered generators and use mains electricity or battery powered equipment where practicable
Operations	- Only use cutting, grinding or sawing equipment fitted or in conjunction with suitable dust suppression techniques - Ensure an adequate water supply on the site for effective dust suppression, using non-potable water where possible and appropriate - Use enclosed chutes and conveyors and covered skips - Minimise drop heights and use fine water sprays wherever appropriate
Waste management	Avoid bonfires and burning of waste materials

5.7 **Step 4 - Determine Significant Effects**

5.7.1 Assuming the relevant mitigation measures outlined in Table 14 are implemented, the residual impact from all dust generating activities is predicted to be **not significant**, in accordance with the IAQM guidance¹⁷.

¹⁷ Guidance on the Assessment of Dust from Demolition and Construction V2.2, IAQM, 2024.

6.0 **OPERATIONAL PHASE ASSESSMENT**

6.1 **Introduction**

6.1.1 There is the potential for air quality impacts as a result of the operation of the proposed development. These are assessed in the following Sections.

6.2 **Stage 1 Screening Criteria**

6.2.1 Any vehicle movements associated with the development will generate exhaust emissions on the local and regional road networks. The proposals have therefore been assessed against the IAQM¹⁸ Stage 1 screening criteria detailed in Section 3.3. The development includes more than 1,000m² of floor space, coupled with more than 10 car parking spaces. As such, the Stage 2 Screening Criteria have been considered below.

6.3 **Stage 2 Screening Criteria**

6.3.1 Traffic flow Information has been provided by CBO Transport Limited, the Transport Consultants for the project. It is anticipated that 50% of the LDV and HDV flows associated with the existing Pennine Aggregates site will transfer to the proposed development. As such, these trips are already on the road network. The distribution of the remaining 'new' trips onto the road network is provided in Table 15.

Table 15 Proposed Development Trip Distribution

Road Name	Within AQMA	LDV AADT Flow	HDV AADT Flow
Waterswallows Lane, between existing and proposed site	No	28	82
Waterswallows Lane, north of existing site	No	34	42
Waterswallows Lane, south of proposed site	No	42	4
A6, north of Batham Gate Road	No	34	31

¹⁸ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

Road Name	Within AQMA	LDV AADT Flow	HDV AADT Flow
A6, between Waterswallows Road and Batham Gate Road	No	0	11
Waterswallows Road, east of Waterswallows Lane	No	0	4
Waterswallows Road, A6 to Waterswallows Lane	No	42	0
A6, south of Waterswallows Road	Yes	42	11

6.3.2 As shown in Table 15, the development is not predicted to result in:

- An increase of LDV flows of more than 500 AADT on any individual road link outside of the Fairfield AQMA, or 100 AADT within the Fairfield AQMA; or,
- An increase of HDV flows of more than 100 AADT on any individual road link outside of the Fairfield AQMA, or 25 AADT within the Fairfield AQMA.

6.3.3 Additionally, the proposals do not include significant highway realignment or the introduction of a junction.

6.3.4 Based on the above, potential air quality impacts associated with the operational phase road vehicle exhaust emissions are predicted to be **not significant**, in accordance with the IAQM¹⁹ Stage 2 screening criteria shown in Section 3.3.

¹⁹ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

7.0 CONCLUSION


- 7.1.1 Redmore Environmental Ltd was commissioned by Pennine Aggregates to undertake an Air Quality Assessment in support of an industrial development on land off Waterswallows Lane, Buxton.
- 7.1.2 The development has the potential to cause air quality impacts at sensitive locations during the construction and operational phases. As such, an Air Quality Assessment was undertaken in order to determine baseline conditions and consider potential effects as a result of the proposals.
- 7.1.3 During the construction phase of the development there is the potential for air quality impacts from fugitive dust emissions from the site. These were assessed in accordance with the IAQM methodology. Site-specific dust control measures were subsequently determined based on the identified risk ratings. Subject to implementation, residual air quality impacts from dust generated by earthworks, construction and trackout activities are predicted to be **not significant**.
- 7.1.4 Potential impacts during the operational phase of the proposed development may occur due to road traffic exhaust emissions associated with vehicles travelling to and from the site. These were assessed against the screening criteria provided within the IAQM guidance²⁰. This indicated road traffic exhaust impacts were predicted to be **not significant**.
- 7.1.5 Based on the assessment results, air quality factors are not considered a constraint to planning consent for the development.

²⁰ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

8.0 **ABBREVIATIONS**

AADT	Annual Average Daily Traffic
AQLV	Air Quality Limit Value
AQMA	Air Quality Management Area
AQO	Air Quality Objective
AQS	Air Quality Strategy
ASR	Annual Status Report
CEMP	Construction Environmental Management Plan
DEFRA	Department for Environment, Food and Rural Affairs
HDV	Heavy Duty Vehicle
HPBC	High Peak Borough Council
IAQM	Institute of Air Quality Management
LA	Local Authority
LAQM	Local Air Quality Management
LDV	Light Duty Vehicle
NGR	National Grid Reference
NO ₂	Nitrogen dioxide
NPPF	National Planning Policy Framework
NPPG	National Planning Policy Guidance
PM ₁₀	Particulate matter with an aerodynamic diameter of less than 10µm
PM _{2.5}	Particulate matter with an aerodynamic diameter of less than 2.5µm

Figures

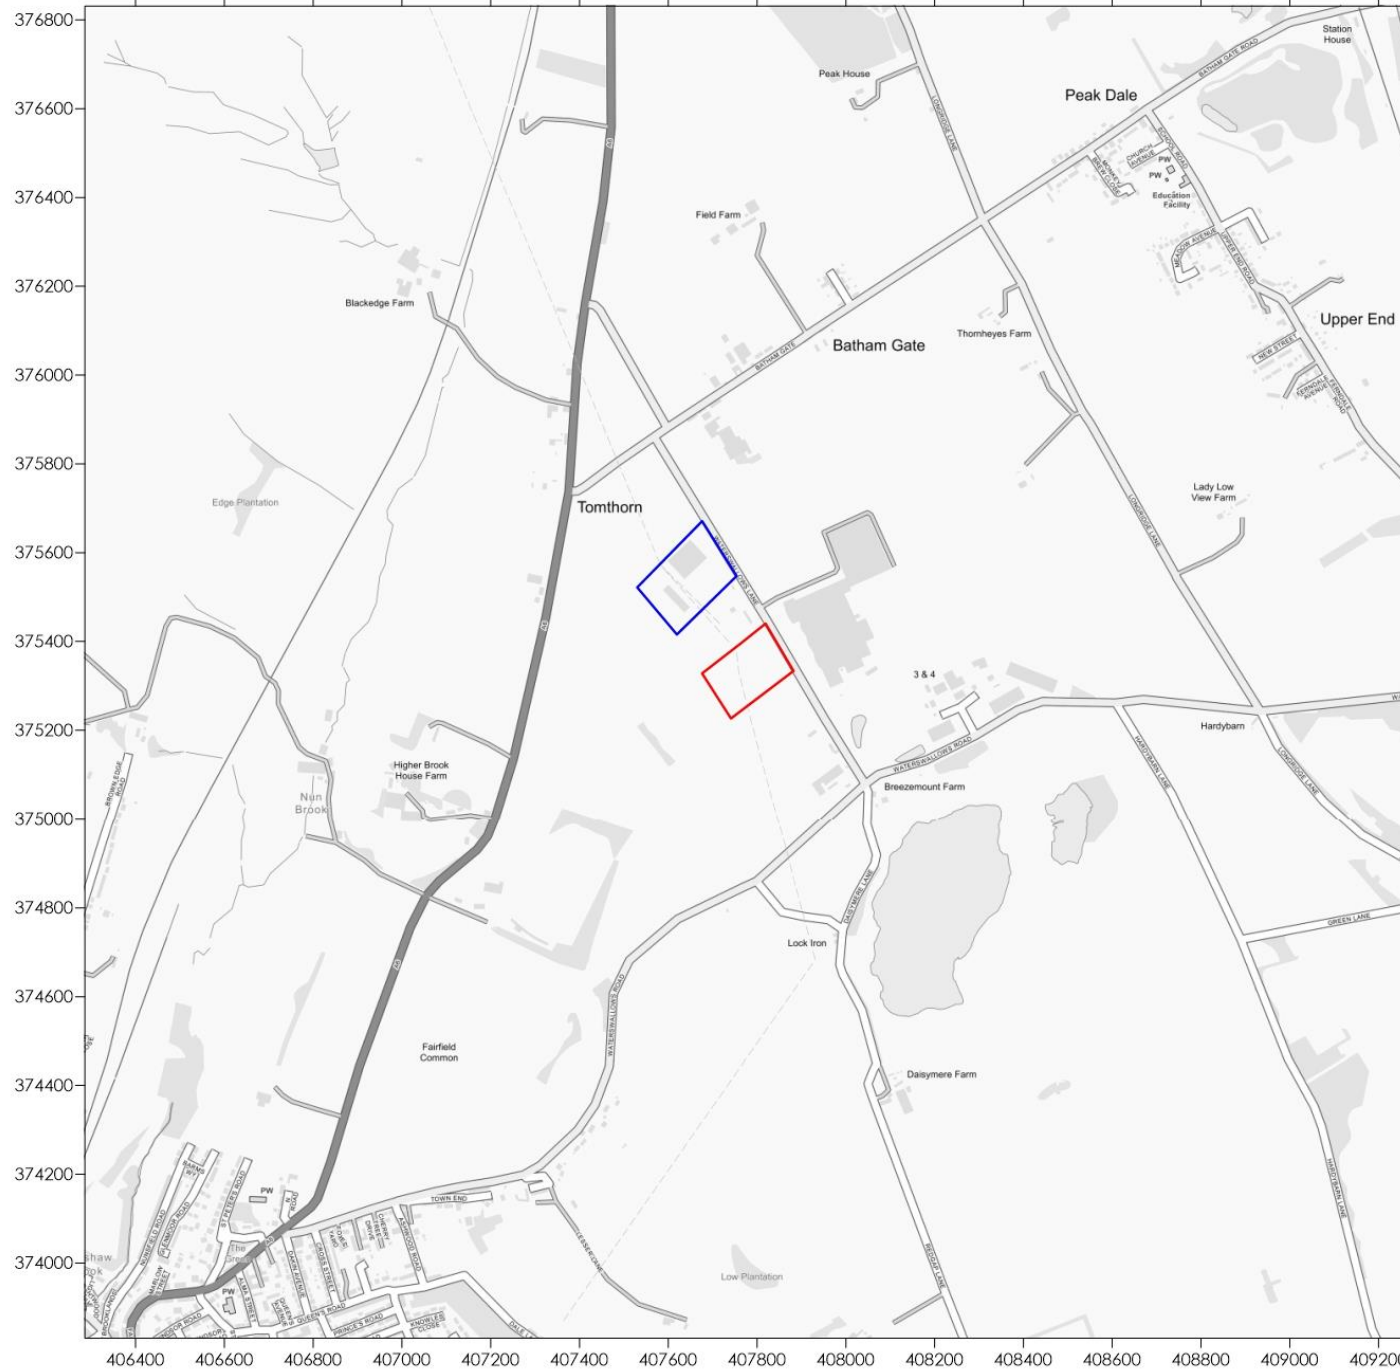

Legend

-  Site Boundary
-  Existing Pennine Aggregates Site

Title

Figure 1 - Site Location

Project

Air Quality Assessment
Waterswallows Lane, Buxton

Project Reference

7879


Client

Pennine Aggregates

Contains Ordnance Survey Data
© Crown Copyright and Database Act 2023



www.red-env.co.uk | 0161 7060075

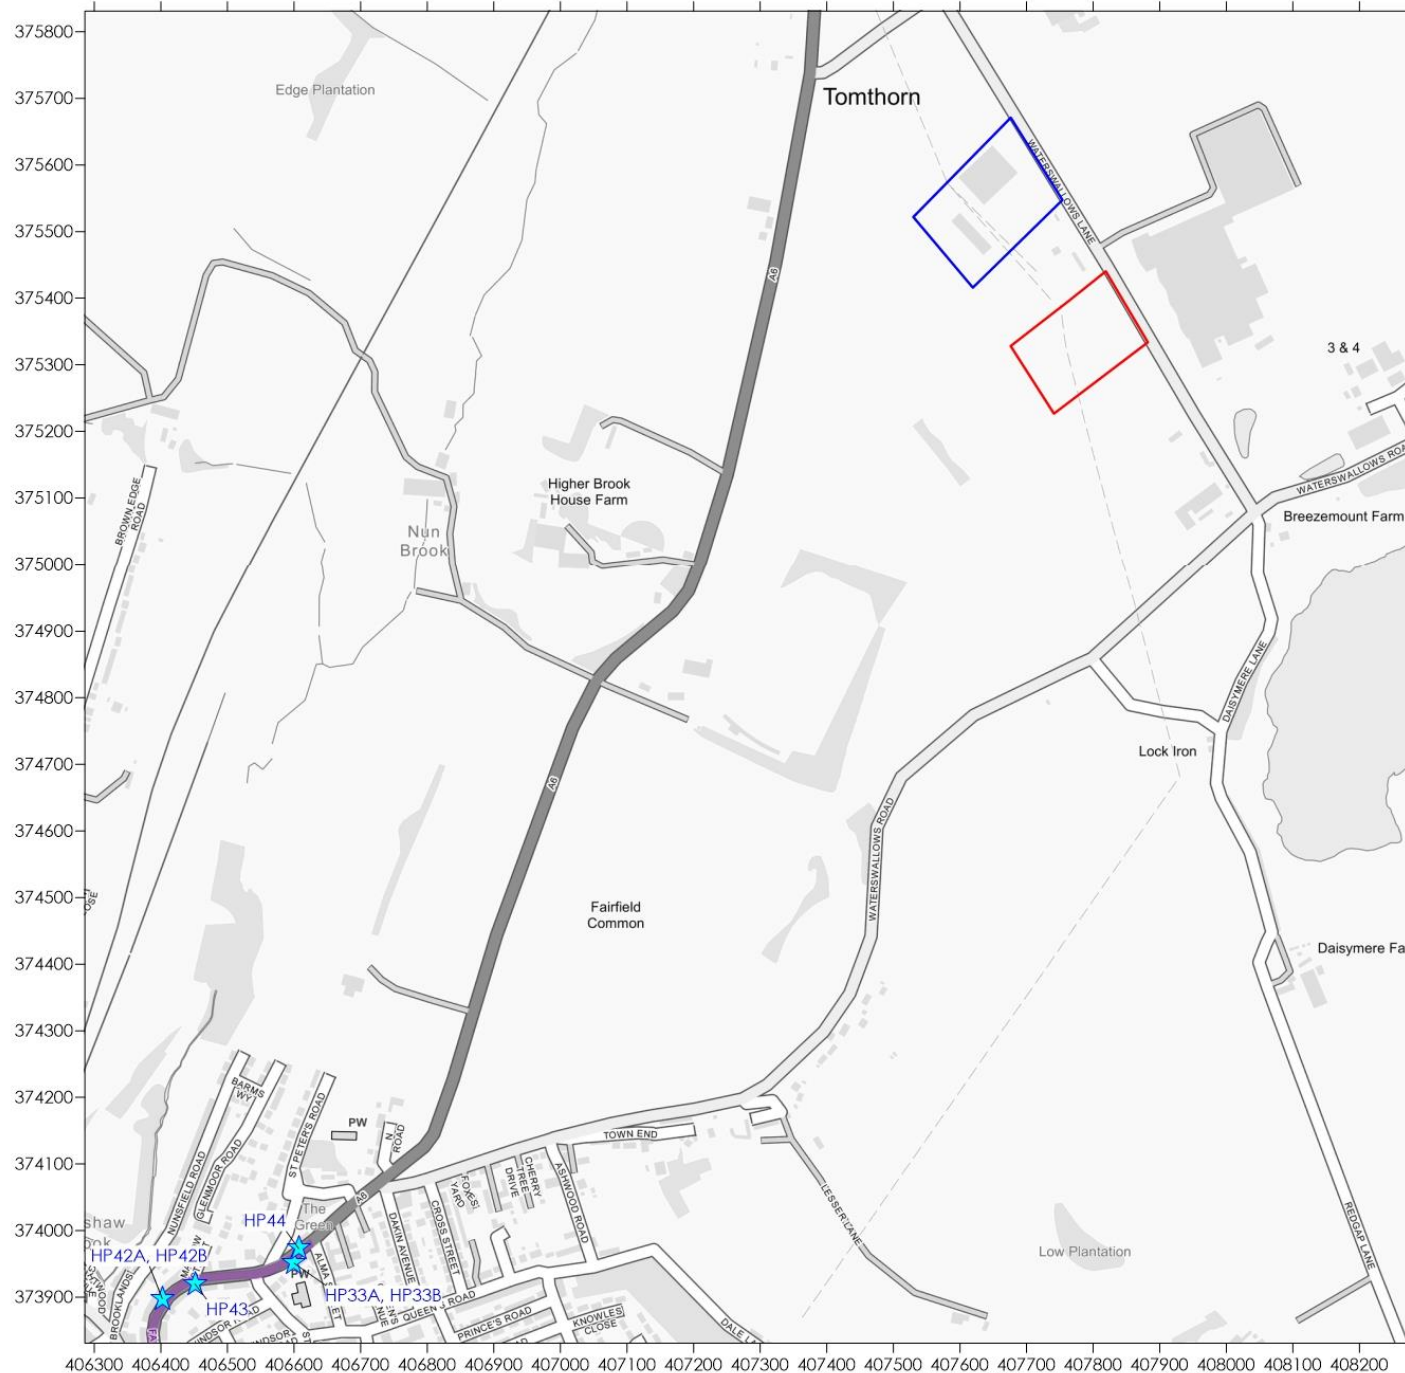

Legend

-  Site Boundary
-  Existing Pennine Aggregates Site
-  Monitor
-  AQMAs

Title

Figure 2 - Local Authority Monitoring and AQMAs

Project

Air Quality Assessment
Waterswallows Lane, Buxton

Project Reference

7879

Client

Pennine Aggregates

Contains Ordnance Survey Data
© Crown Copyright and Database Act 2023



www.red-env.co.uk | 0161 7060075

Appendix 1 - Curricula Vitae

KEY EXPERIENCE:

Jethro is a Chartered Environmentalist and Director of Redmore Environmental with specialist experience in the air quality and odour sectors. His key capabilities include:

- Production and management of Air Quality, Dust and Odour Assessments for a wide-range of clients from the retail, residential, infrastructure, commercial and industrial sectors.
- Production and co-ordination of Environmental Permit applications for a variety of industrial sectors.
- Detailed dispersion modelling of road vehicle and industrial emissions using ADMS-Roads, ADMS-5, AERMOD-PRIME and BREEZE-ROADS. Studies have included impact assessment of ground level pollutant and odour concentrations and assessment of suitability of development sites for proposed end-use.
- Project management and co-ordination of Environmental Impact Assessments and scoping reports for developments throughout the UK.
- Provision of expert witness services at Planning Inquiries.
- Design and project management of pollutant monitoring campaigns.
- Co-ordination and management of large-scale multi-disciplinary projects and submissions.
- Provision of expert advice to local government and international environmental bodies, as well as involvement in production of industry guidance.

SELECT PROJECTS SUMMARY:

Industrial

Shanks Waste Management - Odour Assessments of two waste management facilities to support Environmental Permit Applications.

Tatweer Petroleum - dispersion modelling of Bahrain oil field.

Doha South Sewage Treatment Works - AQA for works extension in Qatar.

IRIS Environmental Appraisal Report Reviews, Isle of Man Government - odour assessment reviews.

Lankem, Greater Manchester - Environmental Permit Application for chemical manufacturing plant.

Newport Docks Bulk Drying, Pelleting and CHP Facility - air quality EIA for gas CHP.

Springshades, Leicester - Environmental Permit Variation Application for textile manufacturing plant.

Valspar, Chester - Odour Assessment and production of Odour Management Plan for a paint manufacturing plant in response to neighbour complaints.

Agrivert - dispersion modelling of odour and CHP emissions from numerous AD plants.

James Cropper Paper Mill, Cumbria - air quality EIA, Environmental Permit Variation and Human Health Risk Assessment for new biomass boiler adjacent to SSSI.

Rigg Approach, Leyton - Air Quality Assessment in support of waste transfer site.

Lynchford Lane Waste Transfer Station - biomass facility energy recovery plant.

Barnes Wallis Heat and Power, Cobham - biomass facility adjacent to AQMA.

Residential

Wood St Mill, Bury - residential development adjacent to scrap metal yard.

Hyams Lane, Holbrook - Odour Assessment to support residential development adjacent to sewage works.

North Wharf Gardens, London - peer review of EIA undertaken for large residential development.

Loxford Road, Alford - Air Quality EIA for residential development, included consideration of impacts from associated package sewage works

Elephant and Castle Leisure Centre - baseline AQA for redevelopment.

Carr Lodge, Doncaster - EIA for large residential development.

Queensland Road, Highbury - residential scheme including CHP.

Bicester Ecotown - dispersion modelling of energy centre.

Castleford Growth Delivery Plan - baseline air quality constraints assessment for town redevelopment.

York St, Bury - residential development adjacent to AQMA.

Temple Point Leeds - residential development adjacent to M1.

Commercial and Retail

Etihad Stadium - Air Quality EIA for the extension to the capacity of the Etihad Stadium, Manchester.

Wakefield College - redevelopment of city centre campus in AQMA.

Manchester Airport Cargo Shed - commercial development.

Manchester Airport Apron Extension - EIA including aircraft emission modelling.

National Youth Theatre, Islington - redevelopment to provide new arts space and accommodation.

KEY EXPERIENCE:

Alex is an Associate Director within Redmore Environmental with specialist experience in the air quality and odour sectors. His key capabilities include:

- Production of Air Quality Chapters to support large scale EIA developments for residential, mixed use and commercial land uses.
- Detailed dispersion modelling of road vehicle exhaust emissions using ADMS-Roads. Studies have included assessment of road traffic exhaust emissions on sensitive receptors and exposure of new residents to poor air quality.
- Undertaken dispersion modelling utilising ADMS and BREEZE AERMOD to assess air quality impacts of peak power plants and various industrial processes for planning and permit applications.
- Advanced canyon modelling to evaluate the impact of altered urban topography on air quality in built up areas.
- Production of site-specific construction environmental management plans.
- Production of air quality mitigation strategies specifically tailored to address issues at individual sites.
- Provided technical advice during a public debate on an odour nuisance issue.
- Qualitative and quantitative odour impact assessments determining the impact of odorous emissions on sensitive receptors
- Odour surveys to assess amenity and suitability of sites for potential future development for residential use.

SELECT PROJECTS SUMMARY:

Washingley Farm, Huntingdon

Air Quality Assessment forming part of an EIA for a proposed 500 residential unit development in Huntingdon. The assessment involved a construction impact assessment of fugitive dust emissions and an impact assessment of the operation of the development; this included increases in road traffic volume potentially impacting on local air quality. A cumulative impact assessment of relevant large scale committed developments in the area was key to the chapter.

Freightmaster Estate, Rainham

Air Quality Assessment for redevelopment of an industrial/storage park including the assessment of road transport emissions on an adjacent ecological designated site. Following a request from the local authority, a detailed review of the predicted impacts on the ecological site was provided.

Braintree Waste Transfer Station

Odour Impact Assessment compiled following comments from the Waste Planning Authority for a Waste Transfer Centre in Braintree. Odour concentrations were predicted at local sensitive receptors through a dispersion modelling assessment.

A46 Binley junction Improvement

Project managing a multi-disciplinary due diligence assessment of the A46 Binley Junction. Undertook passive air quality monitoring survey to support findings of Environmental Assessment Report (EAR).

Medway Industrial Estate

An Air Quality Assessment was required to determine the impacts of a proposed gas-fired engine Short Term Operating Reserve (STOR) site, located within an industrial estate. An iterative modelling process was undertaken in order to establish and agree a stack height with the Local Planning Authority. The industrial estate was located within a former quarry, thus meaning the ground level of the site was significantly below ground level (~9-16m). Through consultation with the engineers for the development several designs were discussed and modelled until a suitable solution was found.

Green Lanes, Haringey

A detailed Air Quality Assessment including dispersion modelling of both road transport emissions and energy centre emissions was provided. The energy centre included a fan assisted flue dilution system emitting at a low level in comparison with the adjacent residential blocks as part of the development. Calculations determined the relevant discharge velocity required in order to not produce significant effects on the residential receptors.

Fulham Town Hall, London

An Air Quality Assessment was provided for the proposed development converting Fulham Town Hall from the current usage into a hotel with business and leisure functions. Street canyon modelling was undertaken and input into the ventilation strategy and design provided in order to satisfy planning criteria due to high levels of air pollutant concentrations predicted.