

North West Elevation as Proposed (1:50)

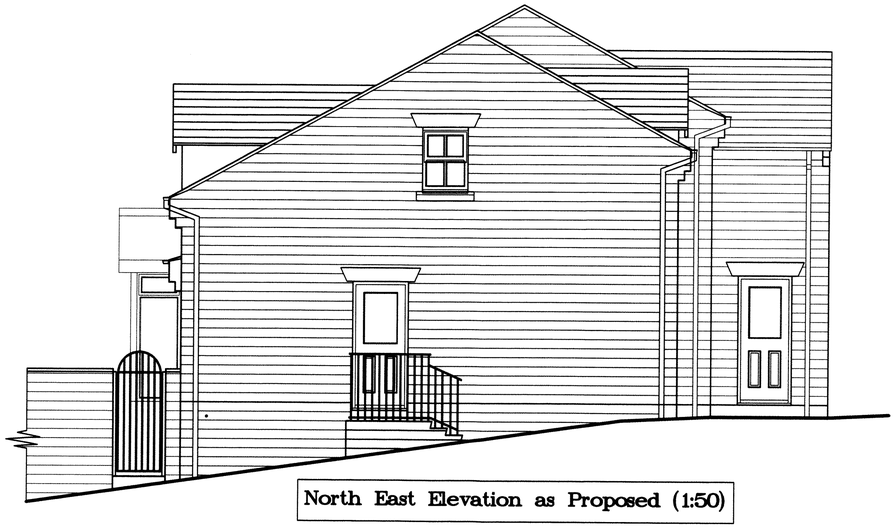

North East Elevation as Proposed (1:50)



South East Elevation as Proposed (1:50)

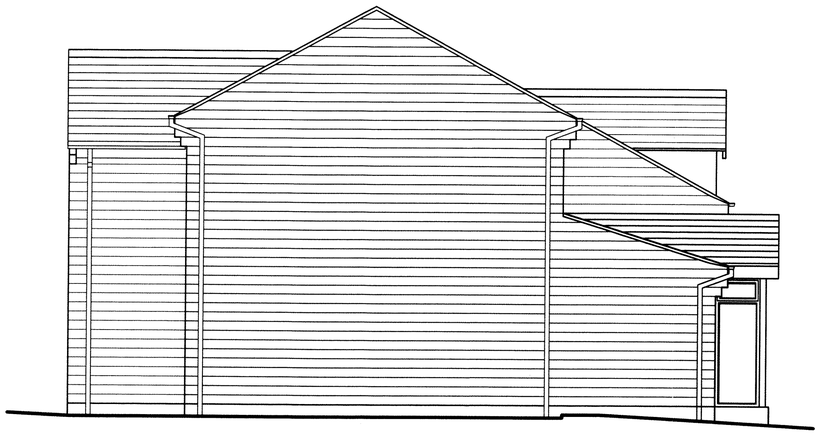

South West Elevation as Proposed (1:50)

Materials:

Masonry: reconstructed stone to match existing.

Roof: inter-locking concrete roof tiles to match existing.

Woodwork: gloss-painted hardwood to match existing.

Rainwater goods: white uPVC to match existing.

© Copyright 2011 Price Dinsdale Associates Ltd.

File: c:\drawings\eundry\eyc3.drw

Rev.	Date	Initials	Description
B	14 Jun 2011	A D L	Modifications to Client's vation requirements.
A	08 Jun 2011	A D L	Pediment added to S E elevation

PDA GROUP
PRICE DINSDALE ASSOCIATES LIMITED
8, The Quadrant, Buxton
Derbyshire SK17 6AW
Tel. Buxton (01 298) 26 234

Client

Ms K Robinson

Job Title

Proposed Extension to
20, Sycamore Close, Buxton

Drawing Title

Elevations as Proposed.

Scale

1 : 50

Job No	Drawing No	Rev.
1011	03	A