Dimensions are to be checked on site. Do not scale from drawings. Report discrepancies to the Architect.



New window to gable for means of escape
Repair stone tile roof as required
Repair / renew rainwater goods.
Repair / rebuild top section of stone elevation.
Repair / refurbish the original timber sash windows to front elevation.
Restore / recarve existing date stone
Existing stone wall rebuild as required by Structural Engineer.
Replace existing ply door with period feature door
Eradication of damp to stone walls
New period railings to front and side of property
Tarmac pavement to front to be replaced with stone paving.

Propsed Front Elevation

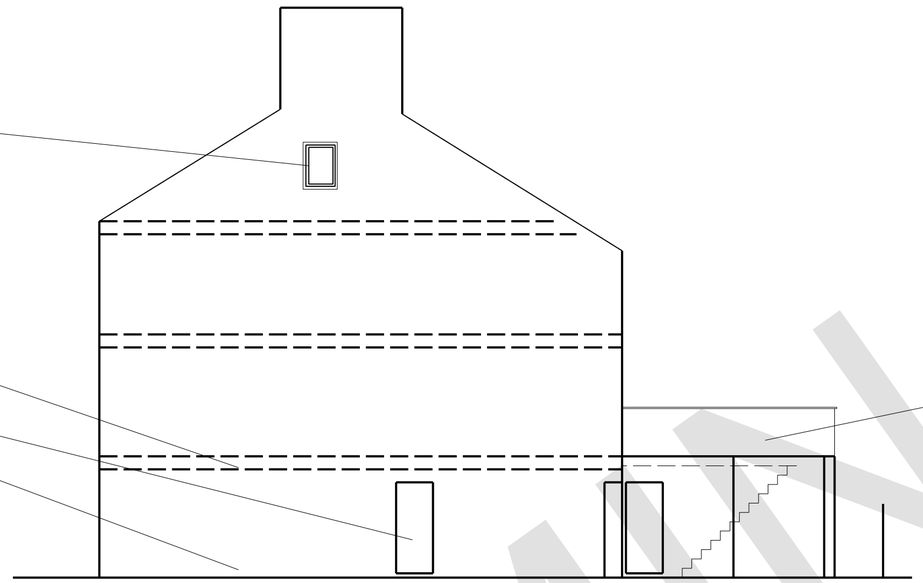

Proposed Side Elevation



Replace upvc windows to rear with timber windows
Replace roof finish and balustrading to rear terrace
Eradicate damp to rear stone walls
Replace existing timber doors to rear.

Proposed Rear Elevation

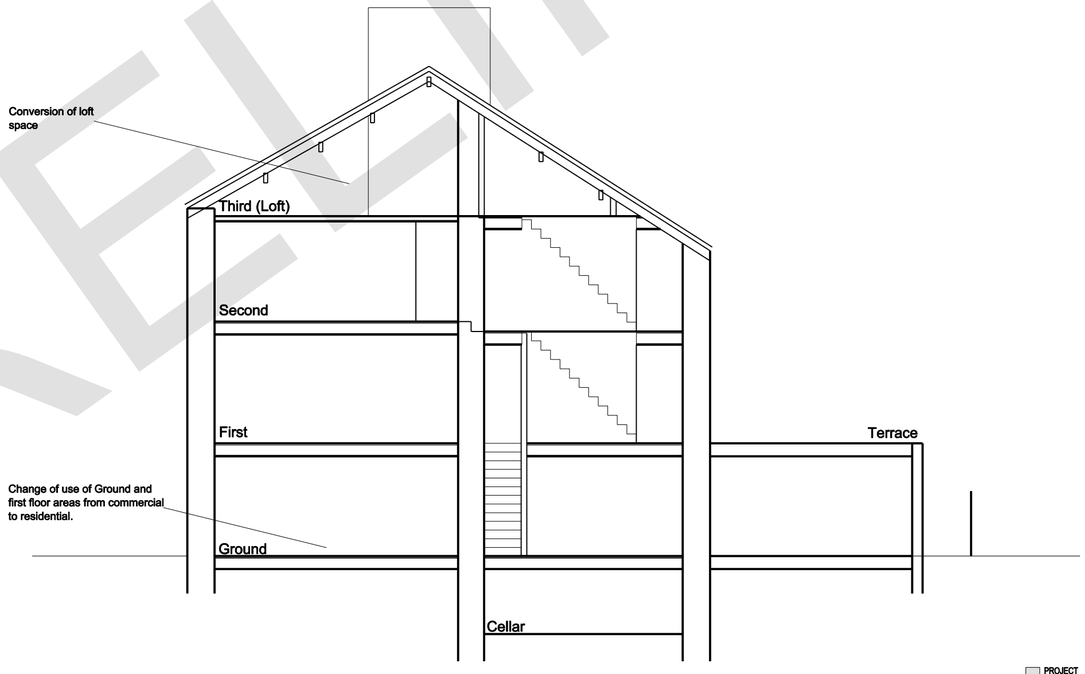

Conversion of loft space
Third (Loft)
Second
First
Terrace
Change of use of Ground and first floor areas from commercial to residential.
Ground
Cellar

Proposed Section

PRELIMINARY

PROJECT
No 2 Church Street
Hayfield, SK22 2JE

TITLE
Proposed Elevations + Section
...

SIZE A2

STATUS PLANNING

PROJECT No 1336
DRAWING No 05
DRAWN by CG
CHECKED ...
DATE Feb 12
SCALE (u.n.o) 1:100

J O H N M c C A L L A R C H I T E C T S L T D
No .1 Arts Village, Henry Street, Liverpool L1 5BS Tel: O151 7O7 1818 Fax: 7O7 1819
Old Coop Building, Church Street, Hayfield, SK22 2JE e-mail: admin@johnmccall.co.uk